



Index

Series 18

| | | |
|------------------------|---|-----------------|
| | Description | Page 431 |
| | Product Assembly | Page 432 |
| | Product Range | |
| | - pushbuttons for standard mounting | Page 433 |
| | - pushbuttons for flush mounting | Page 434 |
| | - accessories / spare parts | Page 435 |
| | Technical Data | Page 438 |
| | Technical Drawing / Dimension / Layout | Page 439 |
| Circuit Drawing | Page 442 | |

General Notes

The series 18 comprises compact indicators for direct connection to 2.2, 12 or 24 VDC and illuminated pushbuttons with maintained or momentary action.

The illuminated pushbuttons are equipped with a snap-action switching system with normally open or normally closed contacts.

The dimensions of the front are 9 x 14 mm, 9 x 9 mm or 9 mm dia. Indicators and illuminated pushbuttons for use with overhanging lenses 14 x 14 mm or 14 mm dia. are also available for recessed front mounting.

Mounting

Mounting from the front through the mounting aperture 8 mm dia. (15.8 x 15.8 mm resp. 16 mm dia. for recessed versions) is assured even with the wiring already attached (mounting dimensions and spacing see pages 440).

The units are provided with soldering or plug-in terminals.

Lenses

The flat lenses, which are made of PMMA, PS, are available in various colours and a transparent version. The surface is nonreflecting (matt).

Illumination

Perfect illumination of the lenses, which can be supplied in various colours, is assured by bipin T1 LEDs in the colours red, yellow and green.

(Compact indicators for connection to 12 or 24 VDC.)


The bipin T1 LED are already integrated in the lenses.

Position Indication

When a switch with maintained action is actuated, the lens remains in the depressed position mechanically. The state of the switch is apparent at all times from the position of the lens.

Number structure

18-XXX.OX5X

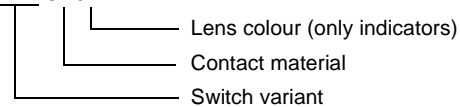

18-9XX.X

Lens

18-9XX.X

Other accessories

Example:

-Illuminated pushbutton; round, momentary action, gold contact; soldering terminals
18-137.035

-Lens red, circular

18-931.2

All dimensions in mm.


We reserve the right to modify technical data.

illuminated-/pushbutton



- 1 lens
- 2 switch housing
- 3 fixing nut

illuminated-/pushbutton, round for flush mounting

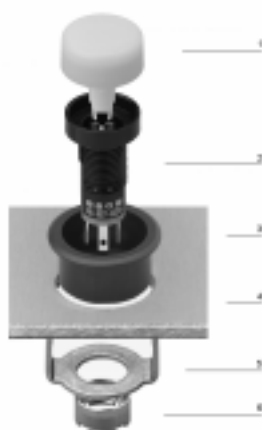

- 1 lens
- 2 switch housing
- 3 front panel
- 4 front ring bezel
- 5 front ring bezel bracket
- 6 fixing nut

indicator



recommended accessories:

| | voltage/current | colour of lens | connection method | 9 x 14 mm part no. | 9 x 9 mm part no. | 9 mm dia. part no. | circuit drawing | technical drawing | mounting dimension | components layout | |
|--|-----------------|----------------|-------------------|--------------------|--------------------|--------------------|-----------------|-------------------|--------------------|-------------------|-------|
| indicator incl. LED, with built-in series resistor for direct connection | 12 VDC/20 mA | green | ST | 18-041.0055 | 18-051.0055 | 18-031.0055 | 1 | 1 | 1 | 1 | 0,002 |
| | | red | ST | 18-041.0052 | 18-051.0052 | 18-031.0052 | 1 | 1 | 1 | 1 | 0,002 |
| | | yellow | ST | 18-041.0054 | 18-051.0054 | 18-031.0054 | 1 | 1 | 1 | 1 | 0,002 |
| | 24 VDC/20 mA | green | ST | 18-042.0055 | 18-052.0055 | 18-032.0055 | 1 | 1 | 1 | 1 | 0,002 |
| | | red | ST | 18-042.0052 | 18-052.0052 | 18-032.0052 | 1 | 1 | 1 | 1 | 0,002 |
| | | yellow | ST | 18-042.0054 | 18-052.0054 | 18-032.0054 | 1 | 1 | 1 | 1 | 0,002 |
| including LED, without built-in series resistor | 2,2 VDC/20 mA | green | ST | 18-040.0055 | 18-050.0055 | 18-030.0055 | 1 | 1 | 1 | 1 | 0,002 |
| | | red | ST | 18-040.0052 | 18-050.0052 | 18-030.0052 | 1 | 1 | 1 | 1 | 0,002 |
| | | yellow | ST | 18-040.0054 | 18-050.0054 | 18-030.0054 | 1 | 1 | 1 | 1 | 0,002 |

connection method: ST = soldering terminal; PCB plug-in base page 437

technical drawing as of page 439, mounting dimensions, components layouts as of page 440, circuit drawing as of page 442

illuminated-/pushbutton



recommended accessories:

lens → 435; lens with LED → 435

| | switching system | contacts | switching action | connection method | 9 x 14 mm part no. | 9 x 9 mm part no. | 9 mm dia. part no. | circuit drawing | technical drawing | mounting dimension | components layout | |
|--------------------------------|------------------|----------|------------------|-------------------|--------------------|-------------------|--------------------|-----------------|-------------------|--------------------|-------------------|-------|
| illuminated-/pushbutton | SA | 1NC | main | ST | 18-248.035 | 18-258.035 | 18-238.035 | 2 | 2 | 1 | 1 | 0,002 |
| | | | mom | ST | 18-148.035 | 18-158.035 | 18-138.035 | 4 | 2 | 1 | 1 | 0,002 |
| | | 1NO | main | ST | 18-247.035 | 18-257.035 | 18-237.035 | 3 | 2 | 1 | 1 | 0,002 |
| | | | mom | ST | 18-147.035 | 18-157.035 | 18-137.035 | 5 | 2 | 1 | 1 | 0,002 |

switching system: SA = snap-action switching element

switching action: main = maintained action, mom = momentary action

connection method: ST = soldering terminal; PCB plug-in base page 437

contacts: NC = normally closed, NO = normally open

technical drawing as of page 439, mounting dimensions, components layouts as of page 440, circuit drawing as of page 442

indicator for flush mounting



recommended accessories:

front bezel-set for flush mounting → 436

| | voltage/current | colour of lens | connection method | 14 x 14 mm part no. | 14 mm dia. part no. | circuit drawing | technical drawing | mounting dimension | components layout | |
|---|-----------------|----------------|-------------------|---------------------|---------------------|-----------------|-------------------|--------------------|-------------------|-------|
| indicator for flush mounting incl. LED, with built-in series resistor for direct connection | 12 VDC/20 mA | green | ST | 18-081.0055 | 18-061.0055 | 1 | 3 | 2 | 2 | 0,003 |
| | | red | ST | 18-081.0052 | 18-061.0052 | 1 | 3 | 2 | 2 | 0,003 |
| | | yellow | ST | 18-081.0054 | 18-061.0054 | 1 | 3 | 2 | 2 | 0,003 |
| | 24 VDC/20 mA | green | ST | 18-082.0055 | 18-062.0055 | 1 | 3 | 2 | 2 | 0,003 |
| | | red | ST | 18-082.0052 | 18-062.0052 | 1 | 3 | 2 | 2 | 0,003 |
| | | yellow | ST | 18-082.0054 | 18-062.0054 | 1 | 3 | 2 | 2 | 0,003 |
| including LED, without built-in series resistor | 2,2 VDC/20 mA | green | ST | 18-080.0055 | 18-060.0055 | 1 | 3 | 2 | 2 | 0,002 |
| | | red | ST | 18-080.0052 | 18-060.0052 | 1 | 3 | 2 | 2 | 0,002 |
| | | yellow | ST | 18-080.0054 | 18-060.0054 | 1 | 3 | 2 | 2 | 0,002 |

connection method: ST = soldering terminal; PCB plug-in base page 437

[technical drawing as of page 439](#), [mounting dimensions](#), [components layouts as of page 440](#), [circuit drawing as of page 442](#)

illuminated-/pushbutton for flush mounting



recommended accessories:

lens overhanging → 435; lens overhanging with LED → 436

front bezel-set for flush mounting → 436

| | switching system | contacts | switching action | connection method | 19 mm dia. part no. | 19 x 19 mm part no. | circuit drawing | technical drawing | mounting dimension | components layout | |
|---|------------------|----------|------------------|-------------------|---------------------|---------------------|-----------------|-------------------|--------------------|-------------------|-------|
| illuminated-/pushbutton for flush mounting | SA | 1NC | main | ST | 18-268.035 | 18-288.035 | 2 | 4 | 2 | 2 | 0,002 |
| | | | mom | ST | 18-168.035 | 18-188.035 | 4 | 4 | 2 | 2 | 0,002 |
| | | 1NO | main | ST | 18-267.035 | 18-287.035 | 3 | 4 | 2 | 2 | 0,002 |
| | | | mom | ST | 18-167.035 | 18-187.035 | 5 | 4 | 2 | 2 | 0,002 |

switching system: SA = snap-action switching element

switching action: main = maintained action, mom = momentary action





connection method: ST = soldering terminal; PCB plug-in base page 437

contacts: NC = normally closed, NO = normally open





[technical drawing as of page 439](#), [mounting dimensions](#), [components layouts as of page 440](#), [circuit drawing as of page 442](#)

at front

lens




| | shape | lens | colour |  9 x 14 mm part no. |  9 x 9 mm part no. | 9 mm dia. part no. |  | |
|---------------------|-------|-------------------|--------|--|---|--------------------|---|---|
| lens plastic | flat | translucent, matt | black | 18-942.0 | 18-952.0 | 18-932.0 | 0,001 |  |
| | | | green | 18-942.5 | 18-952.5 | 18-932.5 | 0,001 | |
| | | | grey | 18-942.8 | 18-952.8 | 18-932.8 | 0,001 | |
| | | | red | 18-942.2 | 18-952.2 | 18-932.2 | 0,001 | |
| | | | white | 18-942.9 | 18-952.9 | 18-932.9 | 0,001 | |
| | | | yellow | 18-942.4 | 18-952.4 | 18-932.4 | 0,001 | |

lens with LED

| | shape | lens | colour |  9 x 14 mm part no. |  9 x 9 mm part no. | 9 mm dia. part no. |  | |
|---|-------|-------------------|--------|--|---|--------------------|---|---|
| lens with LED plastic, without built-in series resistor, typ. forward voltage 2.2 VDC/20 mA | flat | translucent, matt | green | 18-941.5 | 18-951.5 | 18-931.5 | 0,001 |  |
| | | | red | 18-941.2 | 18-951.2 | 18-931.2 | 0,001 | |
| | | | yellow | 18-941.4 | 18-951.4 | 18-931.4 | 0,001 | |



lens overhanging

for flush mounting

| | shape | lens | colour | 19 mm dia. part no. |  19 x 19 mm part no. |  | |
|---------------------------------|-------|-------------------|--------|---------------------|---|---|---|
| lens overhanging plastic | flat | translucent, matt | black | 18-962.0 | 18-982.0 | 0,001 |  |
| | | | green | 18-962.5 | 18-982.5 | 0,001 | |
| | | | grey | 18-962.8 | 18-982.8 | 0,001 | |
| | | | red | 18-962.2 | 18-982.2 | 0,001 | |
| | | | white | 18-962.9 | 18-982.9 | 0,001 | |
| | | | yellow | 18-962.4 | 18-982.4 | 0,001 | |



lens overhanging with LED

for flush mounting



| | shape | lens | colour | 19 mm dia. part no. | \varnothing 19 x 19 mm part no. |  | |
|---|-------|-------------------|--------|------------------------|---|---|---|
| lens overhanging with LED plastic, without built-in series resistor, typ. forward voltage 2.2 VDC/20 mA | flat | translucent, matt | green | 18-961.5 | 18-981.5 | 0,001 |  |
| | | | red | 18-961.2 | 18-981.2 | 0,001 | |
| | | | yellow | 18-961.4 | 18-981.4 | 0,001 | |

front bezel-set for flush mounting

for overhanging lenses




| | material | colour | 19 mm dia. part no. | \varnothing 19 x 19 mm part no. |  | |
|---|----------|--------|------------------------|---|---|--|
| front bezel-set for flush mounting for lens round | plastic | black | 18-920.3 | 18-920.2 | 0,006 |  |
| for lens square | plastic | black | | 18-920.1 | 0,006 | |

blind plug

| | colour | \varnothing 9 x 9 mm part no. | 9 mm dia. part no. |  | |
|-------------------|--------|---------------------------------------|-----------------------|---|---|
| blind plug | black | 19-948.0 | 19-949.0 | 0,001 |  |

at back



PCB plug-in base

| | for | pin orientation | part no. | technical drawing | components layout |  | |
|-------------------------|--------------------|-----------------|---------------|-------------------|-------------------|---|--|
| PCB plug-in base | soldering terminal | axial | 18-945 | 5 | 3 | 0,001 |   |
| | | right-angled | 18-946 | 6 | 4 | 0,001 | |



technical drawing as of page 439. components layouts as of page 440

assembling

lens remover

| | part no. |  | |
|---------------------|---------------|--|---|
| lens remover | 18-910 | 0,002 |  |

mounting tool

| | part no. |  | |
|---|---------------|---|---|
| mounting tool for tightening (or loosening) fixing nuts starting torque fixing nut max. 20 Ncm | 19-905 | 0,011 |  |

actuator with snap-action switching element

switching system

The snap-action switching system was designed for switching low powers in electronic circuits.
Single-break snap-action contact.

material

actuator case

polyamide; colour black

lens

polymethylacrylate PMMA, polycarbonate PC

material of contacts

gold contact on nickel plating

switch rating

10 μ A/100 μ V to 100 mA at 42 VAC/VDC

volume resistance

\leq 100 m Ω starting value (initial)
IEC 512-2, Test 2 b

mechanical characteristics

actuating force

1.4 N

ambient air temperature

-25°C to +65°C
(as per DIN IEC 68-)

connection method

The terminals can be used as soldering terminals.
max.wire diameter: 2 of 0.5 mm²
max.wire ccross-section of stranded cable: 1 x 0.75 mm²
wire cross-section of terminal: 1.6 x 0.4 mm

degree of protection

front as per IEC 529: IP 40

mechanical life

as per IEC 512-5, test 9a
momentary action 2 mio. cycles of operation
maintained action 1 mio. cycles of operation

rebound time

\leq 2.5 ms

resistance to shock

(single impacts, semi-sinusoidal)
50 g for 11 ms as per IEC 68-2-27

resistance to vibration

(sinusoidal) 10 g at 10-2000 Hz, amplitude 0.75 mm as per IEC 512-4-4

starting torque

for fixing nut max. 20 Ncm

storage temperature

-40°C to +80°C
(as per DIN IEC 68-)

travel

2.2 mm \pm 0.2 mm

electrical characteristics

electric strength

500 VAC, 50 Hz, 1 min. between all terminals and earth, as per IEC 512-2-11

electrical life

\geq 500.000 cycles of operation at 30 VDC/100 mA to IEC 512-5, Test 9c


power consumption

20 mA

technical drawing


1 indicator

page 433

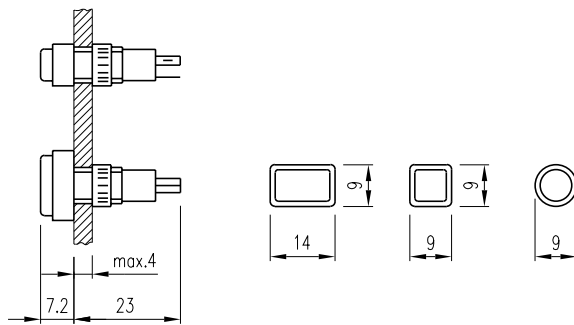


2 illuminated-/pushbutton

page 433

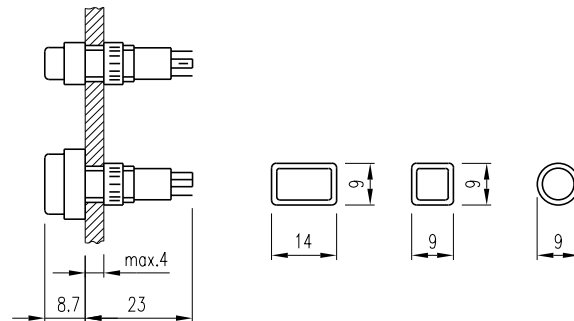


3 indicator for flush mounting

page 434

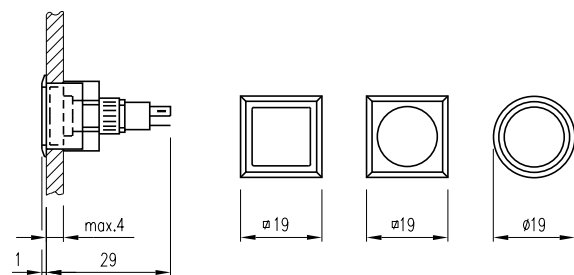


4 illuminated-/pushbutton for flush mounting


page 434

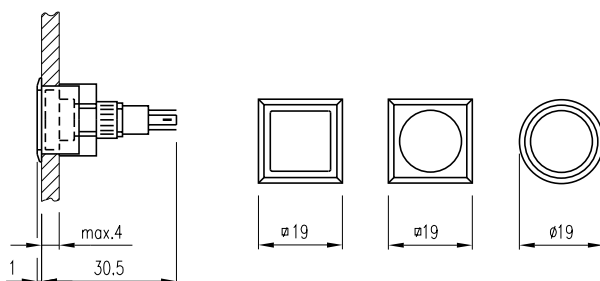

5 PCB plug-in base
page 437




6 PCB plug-in base
page 437




mounting dimension

1 indicator, illuminated-/pushbutton
page 433

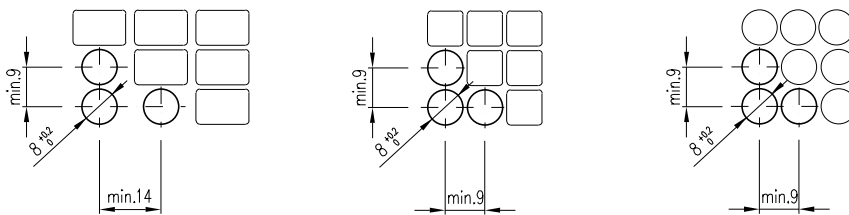

2 indicator for flush mounting, illuminated-/pushbutton for flush mounting
page 434

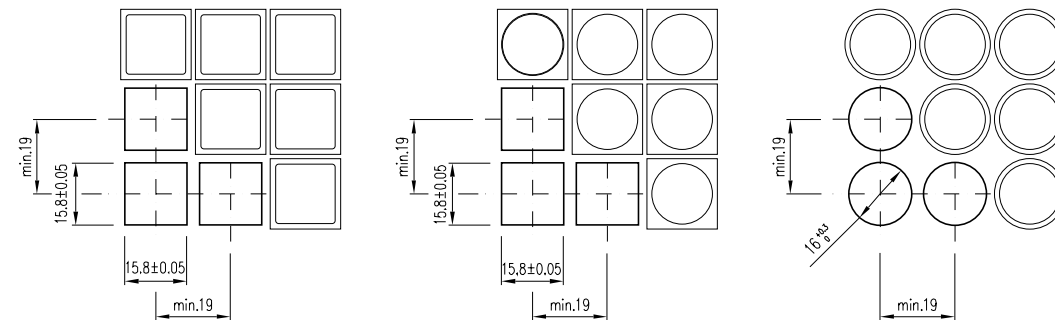


components layouts

1 indicator, illuminated-/pushbutton
page 433




2 indicator for flush mounting, illuminated-/pushbutton for flush mounting
page 434




3 PCB plug-in base

page 437



4 PCB plug-in base

page 437



| | circuit drawing |
|---|-----------------|
| 1 | |
| 2 | |
| 3 | |
| 4 | |
| 5 | |