



2.5x7.1 RECTANGULAR BAR LED LAMPS

LTL-3213A BRIGHT RED LTL-3253A YELLOW
 LTL-3223A HI. EFF. RED LTL-3293A ORANGE
 LTL-3233A GREEN

LITE-ON INC

31E D 5536367 0002173 7 LTN

T-41.23

FEATURES

- LOW POWER CONSUMPTION.
- MOST SUITABLE FOR USE LIKE LEVEL INDICATOR.
- EXCELLENT UNIFORMITY OF LIGHT EMISSION.
- LONG LIFE-SOLID STATE RELIABILITY.
- I.C. COMPATIBLE.


DESCRIPTION

The Bright Red source color devices are made with Gallium Phosphide on Gallium Phosphide Red Light Emitting Diode.


The High Efficiency Red and Orange source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Orange Light Emitting Diode.

The Green source color devices are made with Gallium Phosphide on Gallium Phosphide Green Light Emitting Diode.

The Yellow source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Yellow Light Emitting Diode.

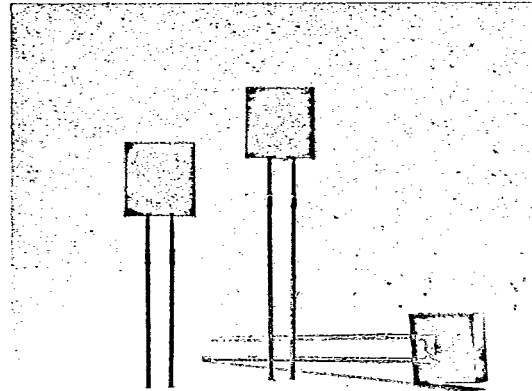

PACKAGE DIMENSIONS

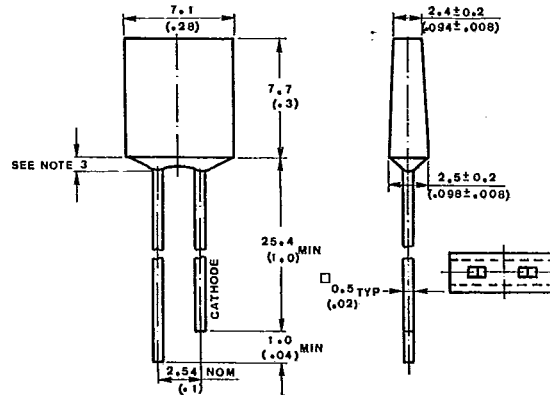

NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ (.010") unless otherwise noted.
3. Protruded resin under flange is 1.5mm (.059") max.
4. Lead spacing is measured where the leads emerge from the package.
5. Specifications are subject to change without notice.

DEVICES

PART NO. LTL-	LENS		SOURCE COLOR
	COLOR	DIFFUSION	
3213A	Red	Diffused	Bright Red
3223A	Red	Diffused	Hi. Eff. Red
3233A	Green	Diffused	Green
3253A	Yellow	Diffused	Yellow
3293A	Orange	Diffused	Orange

ABSOLUTE MAXIMUM RATINGS AT $T_A = 25^\circ\text{C}$

PARAMETER	BRIGHT RED	GREEN	YELLOW	HI. EFF. RED ORANGE	UNIT
Power Dissipation	40	100	60	100	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	60	120	80	120	mA
Continuous Forward Current	15	30	20	30	mA
Derating Linear From 25°C	0.2	0.4	0.25	0.4	mA/ $^\circ\text{C}$
Reverse Voltage	5	5	5	5	V
Operating Temperature Range	-55 $^\circ\text{C}$ to +100 $^\circ\text{C}$				
Storage Temperature Range	-55 $^\circ\text{C}$ to +100 $^\circ\text{C}$				
Lead Soldering Temperature [1.6mm (0.063in) From Body]	260 $^\circ\text{C}$ for 5 Seconds				

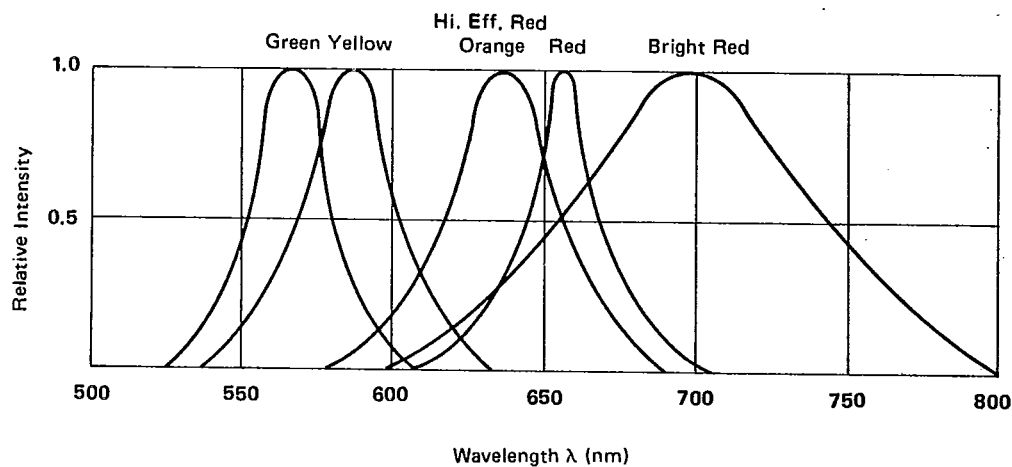


FIG. 1 RELATIVE INTENSITY VS. WAVELENGTH



ELECTRICAL/OPTICAL CHARACTERISTICS AND CURVES AT TA = 25°C

PARAMETER	SYMBOL	PART NO. LTL-	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Luminous Intensity	Iv	3213A 3223A	0.3 1.1	0.7 2.5		mcd	IF = 10 mA Note 1
Viewing Angle	2θ½	3213A 3223A		130		deg.	Note 2 (Fig. 6)
Peak Emission Wavelength	λPEAK	3213A 3223A		697 635		nm	Measurement @ Peak (Fig. 1)
Spectral Line Half Width	Δλ	3213A 3223A		90 40		nm	
Forward Voltage	VF	3213A 3223A		2.1 2.0	2.8	V	IF = 20 mA
Reverse Current	IR	3213A 3223A			100	μA	VR = 5V
Capacitance	C	3213A 3223A		55 20		PF	VF = 0 f = 1 MHZ

NOTES: 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commission Internationale De L'Eclairage) eye-response curve.
 2. θ½ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.




FIG. 2 FORWARD CURRENT VS. FORWARD VOLTAGE




FIG. 3 FORWARD CURRENT DERATING CURVE




FIG. 4 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

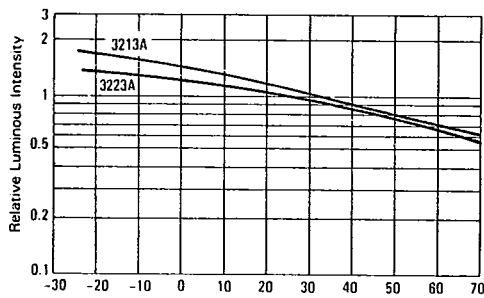


FIG. 5 LUMINOUS INTENSITY VS. AMBIENT TEMPERATURE




FIG. 6 SPATIAL DISTRIBUTION

ELECTRICAL/OPTICAL CHARACTERISTICS AND CURVES AT TA = 25°C

PARAMETER	SYMBOL	PART NO. LTL-	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Luminous Intensity	Iv	3233A 3253A	0.8 0.5	1.9 1.7		mcđ	If = 10 mA Note 1
Viewing Angle	2θ½	3233A 3253A		130		deg.	Note 2 (Fig. 11)
Peak Emission Wavelength	λPEAK	3233A 3253A		565 585		nm	Measurement @ Peak (Fig. 1)
Spectral Line Half Width	Δλ	3233A 3253A		30 35		nm	
Forward Voltage	V _F	3233A 3253A		2.1	2.8	V	If = 20 mA
Reverse Current	I _R	3233A 3253A			100	μA	V _R = 5V
Capacitance	C	3233A 3253A		35 15		PF	V _F = 0 f = 1 MHz

NOTES: 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commission Internationale De L'Eclairage) eye-response curve.
 2. θ½ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.




FIG. 7 FORWARD CURRENT VS. FORWARD VOLTAGE




FIG. 8 FORWARD CURRENT DERATING CURVE

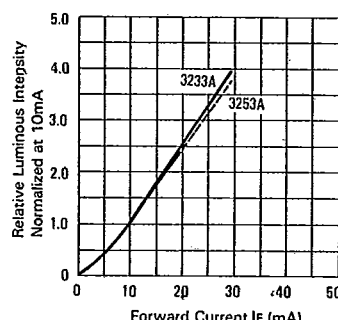


FIG. 9 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

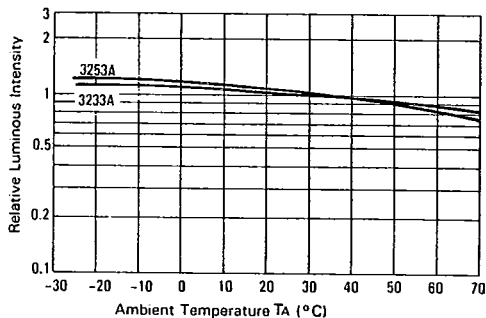


FIG. 10 LUMINOUS INTENSITY VS. AMBIENT TEMPERATURE




FIG. 11 SPATIAL DISTRIBUTION



ELECTRICAL/OPTICAL CHARACTERISTICS AND CURVES AT TA = 25°C

PARAMETER	SYMBOL	PART NO. LTL-	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Luminous Intensity	Iv	3293A	1.1	2.5		mcd	IF = 10 mA Note 1
Viewing Angle	2θ½	3293A		130		deg.	Note 2 (Fig. 16)
Peak Emission Wavelength	λPEAK	3293A		630		nm	Measurement @ Peak (Fig. 1)
Spectral Line Half Width	Δλ	3293A		40		nm	
Forward Voltage	VF	3293A		2.0	2.8	V	IF = 20 mA
Reverse Current	IR	3293A			100	μA	VR = 5V
Capacitance	C	3293A		20		PF	VF = 0 f = 1 MHZ

NOTES: 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commission Internationale De L'Eclairage) eye-response curve.
 2. θ½ is the off-axis angle at which the luminous intensity is half the axial luminous intensity




FIG. 12 FORWARD CURRENT VS. FORWARD VOLTAGE




FIG. 13 FORWARD CURRENT DERATING CURVE




FIG. 14 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

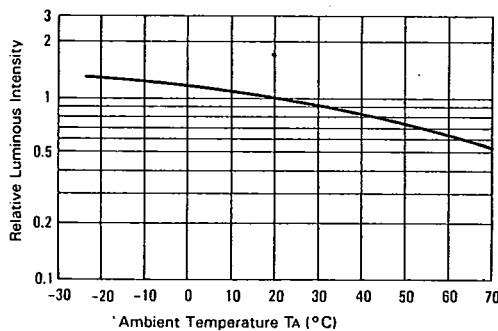


FIG. 15 LUMINOUS INTENSITY VS. AMBIENT TEMPERATURE




FIG. 16 SPATIAL DISTRIBUTION