

WGB08-63 High Breaking Capacity Circuit Breaker



WGB08-63 1P



WGB08-63 2P



WGB08-63 3P



WGB08-63 4P


Application

WGB08-63 high breaking capacity circuit breaker is suitable for illumination and distribution in industry and flats. It has the protection of overload and short circuit in electric motor distribution system. It is of pleasing outlook, light in weight, reliable performance, high breaking capacity, and easy installation. It can be combined with other functional accessories to effect multi-function protection and control such as leakage protection, under voltage protection, over voltage protection, auxiliary switch control and isolation control. It is CB, VDE, KEMA approved.

Technical Specification

Poles	1P, 2P, 3P, 4P
Rated voltage(Un)	230V/400V
Rated current(In)	6, 10, 16, 20, 25, 32, 40, 50, 63A
Characteristic curve	IEC60898 B.C
Rated short-circuit capacity(Icn)	10000A for 6-40A; 6000A for 50-63A
Rated service short-circuit capacity(Ics)	7500A for 6-40A; 6000A for 50-63A
Terminal protection	IP 20

Tripping Curve

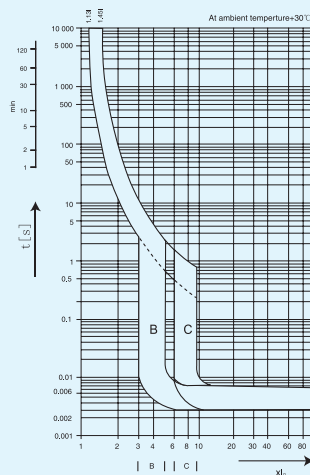

Configuration and Mounting Dimensions

