

T-01-17



RECTIFIER DIODES

Silicon rectifier diodes in DO-4 metal envelopes, intended for use in power rectifier applications.

The series consists of the following types:

Normal polarity (cathode to stud): BYX98-300 to 1200.

Reverse polarity (anode to stud): BYX98-300R to 1200R.


QUICK REFERENCE DATA

		BYX98-300(R)	600(R)	1200(R)	
Repetitive peak reverse voltage	V _{RRM}	max. 300	600	1200	V
Average forward current	I _{F(AV)}		max.	10	A
Non-repetitive peak forward current	I _{FSM}		max.	75	A

MECHANICAL DATA

Dimensions in mm

DO-4: Supplied with device: 1 nut, 1 lock-washer
Nut dimensions across the flats: 9.5 mm

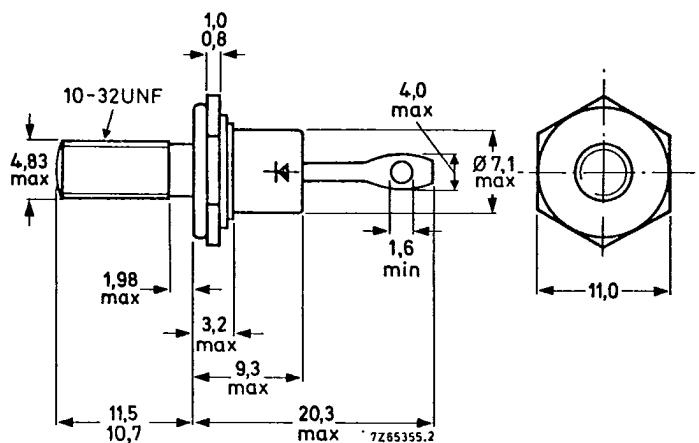

Net mass: 6 g

Diameter of clearance hole: max. 5.2 mm

Accessories supplied on request:

see ACCESSORIES section

The mark shown applies to normal polarity types.

Torque on nut: min. 0,9 Nm
(9 kg cm)
max. 1,7 Nm
(17 kg cm)

 Products approved to CECC 50 009-004, available on request

N AMER PHILIPS/DISCRETE

25E D ■ 6653931 0022860 6 ■ ■

RATINGS Limiting values in accordance with the Absolute Maximum System (IEC 134)

Voltages

		BYX98-300(R)	600(R)	1200(R)	
Non-repetitive peak reverse voltage ($t \leq 10$ ms)	V_{RSM}	max. 300	600	1200	V
Repetitive peak reverse voltage ($\delta \leq 0,01$)	V_{RRM}	max. 300	600	1200	V
Crest working reverse voltage	V_{RWM}	max. 200	400	800	V
Continuous reverse voltage	V_R	max. 200	400	800	V

Currents

Average forward current (averaged over any 20 ms period) up to $T_{mb} = 97$ °C at $T_{mb} = 125$ °C	$I_{F(AV)}$	max.	10	A
	$I_{F(AV)}$	max.	6	A
R.M.S. forward current	$I_{F(RMS)}$	max.	16	A
Repetitive peak forward current	I_{FRM}	max.	75	A
Non-repetitive peak forward current ($t = 10$ ms; half sine-wave) $T_j = 150$ °C prior to surge; with reapplied V_{RWMmax}	I_{FSM}	max.	75	A
I^2t for fusing ($t = 10$ ms)	I^2t	max.	28	A^2s

Temperatures

Storage temperature	T_{stg}	-55 to +150	°C
Junction temperature	T_j	max.	150 °C

THERMAL RESISTANCE

From junction to ambient in free air	$R_{th j-a}$	=	50	°C/W
From junction to mounting base	$R_{th j-mb}$	=	3	°C/W
From mounting base to heatsink with heatsink compound	$R_{th mb-h}$	=	0,5	°C/W
without heatsink compound	$R_{th mb-h}$	=	0,6	°C/W
Transient thermal impedance; $t = 1$ ms	$Z_{th j-mb}$	=	0,3	°C/W


CHARACTERISTICS

T-01-17

Forward voltage $I_F = 20 \text{ A}$; $T_j = 25^\circ\text{C}$ V_F < 1,7 V 1)Reverse current $V_R = V_{RWMmax}$; $T_j = 125^\circ\text{C}$ I_R < 200 μA

OPERATING NOTES

1. The top connector should neither be bent nor twisted; it should be soldered into the circuit so that there is no strain on it.
During soldering the heat conduction to the junction should be kept to a minimum.
2. Where there is a possibility that transients, due to the energy stored in the transformer, will exceed the maximum permissible non-repetitive peak reverse voltage, see General Section for information on damping circuits.

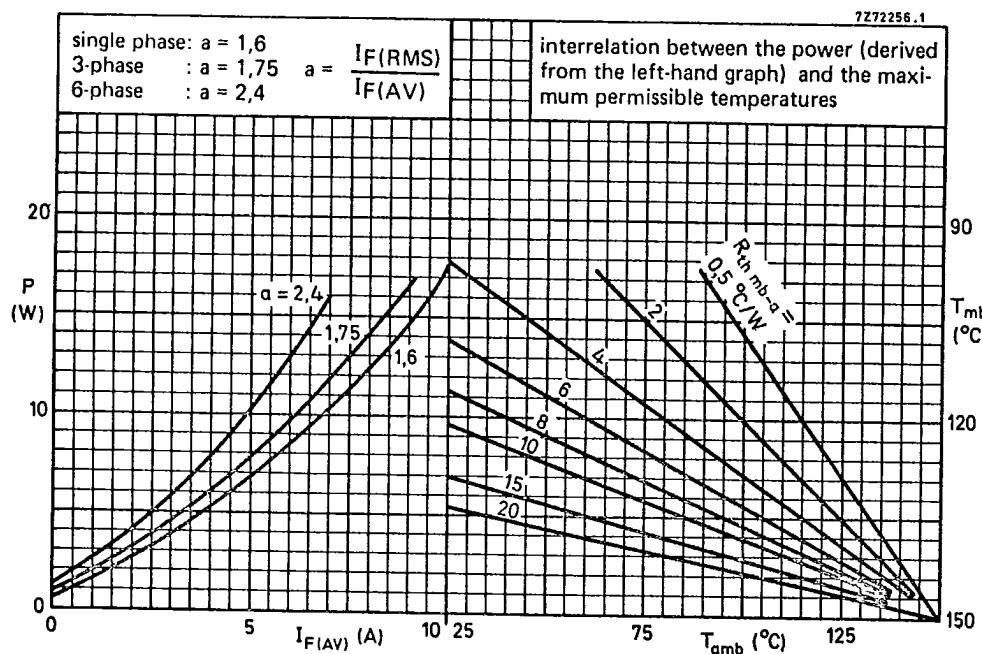

1) Measured under pulse conditions to avoid excessive dissipation.



BYX98
SERIES

T-01-17

N AMER PHILIPS/DISCRETE

25E D

6653931 0022862 T

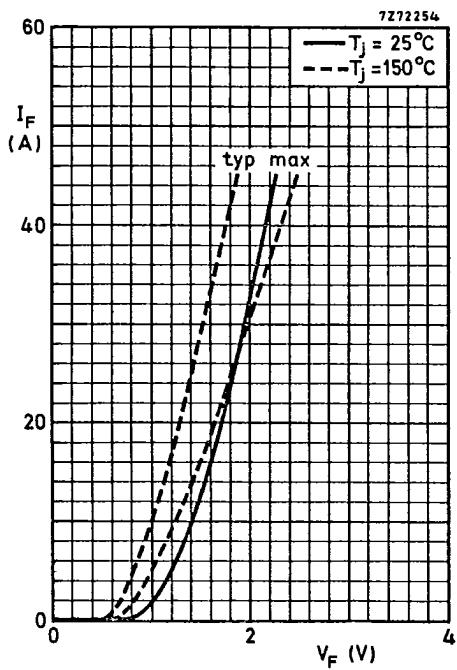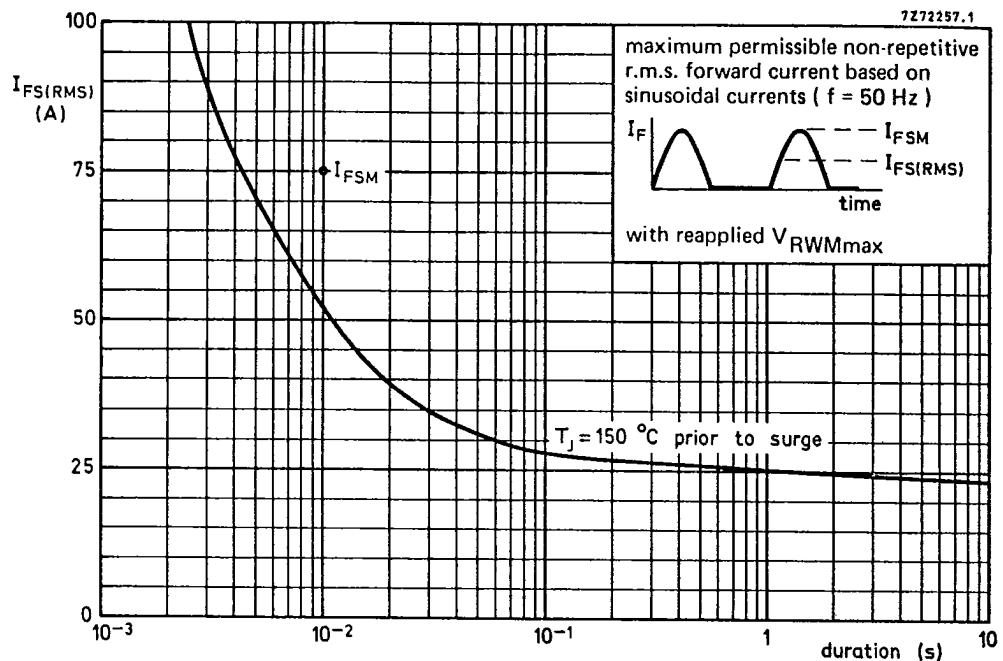

662

November 1975

BYX98

SERIES


N AMER PHILIPS/DISCRETE

25E D

6653931 0022863 1

7272255

T-01-17

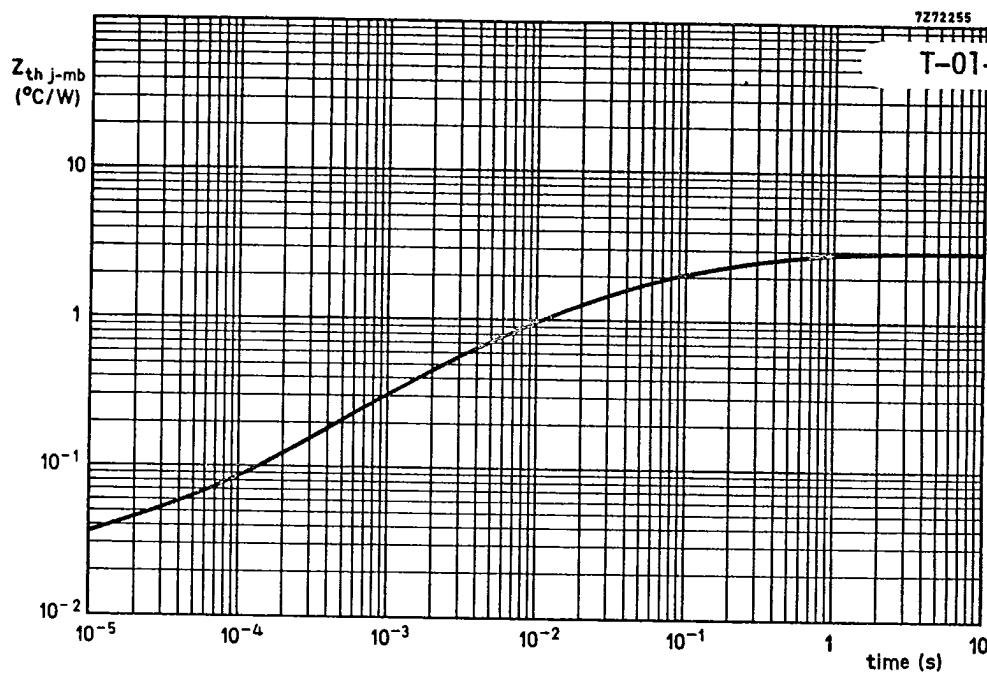

November 1975

663