

# DMP-100

## 1. Basic specifications

Items	Specifications
Product type	Digital audio system SD/MMC CARD and USB MP3 available
Product No.	DMP-100
Supply voltage	DC 12V (10~14V)
Power consumption	Within 2W
Dimensions	120mm(W) × 56.6mm(D) × 22mm(H)
Weight (approximate)	47.5g





## 2. Electrical performance

Items	Condition	Specifications
1. Output level	1KHz 0dB	500mV±2dB
2. Output level difference between channels	1KHz 0dB	Less than 2dB
3. Frequency response (using 1KHz 0dB as reference)	20Hz 100Hz 10KHz	±1dB ±1dB ±2dB
4. Separation	1KHz	More than 60dB
5. THD	1KHz	Less than 0.2%
6. S/N ration	1KHz	More than 75 dB

\* Addition: regarding items 4,5use 20KHz low-pass filter.


Regarding item 6 use 20KHz low-pass filter and IHF-A curve filter.

### 3. Function explanation


Keys	Explanation
	In MP3 mode: Press this key, the set will start to play. When the set is in pause or stop state. Press this key, the set will pause. When the set is playing.
	In MP3 mode: Press this key, the set will change to backward track. Long press this key, the volume will increase.
	In MP3 mode: Press this key, the set will change to forward track. Long press this key, the volume will decrease.
RP1	In MP3 mode: Press this key, to change the set into REPEAT 1 and REPEAT ALL mode.
 MODE	When press this key shortly, the set will change the mode between USB and CARD. Press this key over 3 seconds, will turn off the set.

## 4. OUTLOOK & DIMENSIONS


### DMP-100

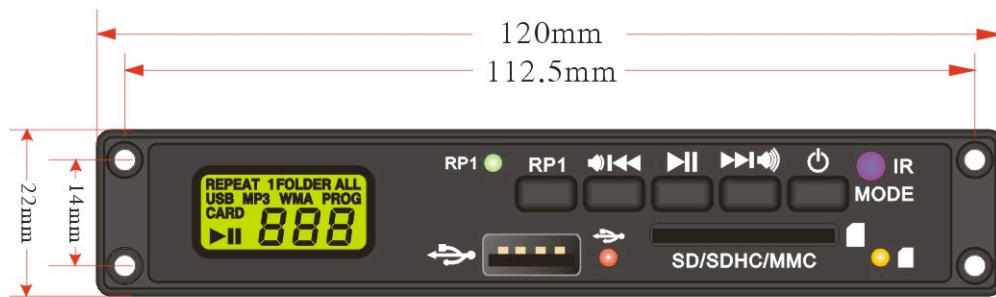

FRONT

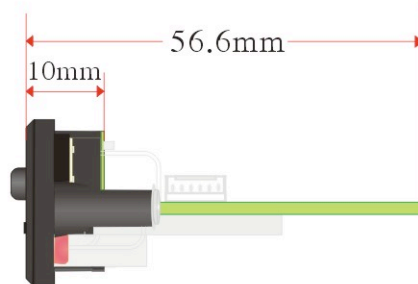

SIDE

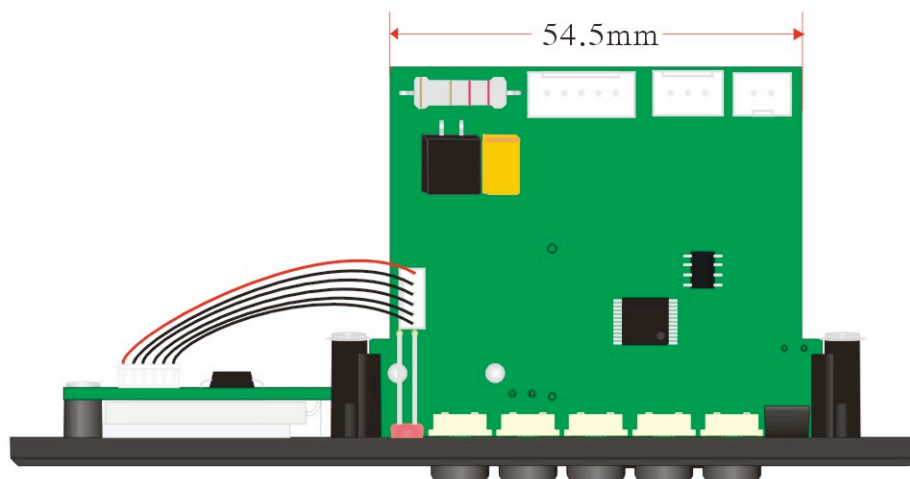

TOP