



TS317

3-Terminal Adjustable Output Positive Voltage Regulators

The TS317 is adjustable 3-terminal positive voltage regulator capable of supplying up to 1.5A over an output voltage range of 1.25V to 37V. This voltage regulator is exceptionally easy to use and require only two


external resistors to set the output voltage. Further, it employs internal current limiting, thermal shutdown and safe area compensation, making it essentially blow-out proof.

FEATURES

- Output Current up to 1.5 Ampere
 TS317CZ / TS317CM: 1.5A
 TS317CP / TS317CW: 500mA
 TS317CS: 300mA
 TS317CT: 100mA
- Output Adjustable between 1.25V and 37V
- Internal Thermal Overload Protection
- Internal Short-Circuit Current Limiting
 Constant with Temperature
- Output Transistor Safe-Area Compensation
- Floating Operation for High Voltage Applications
- Available in surface mount and standard 3-lead Transistor Packages
- Eliminates Stocking Many Fixed Voltages


ORDERING INFORMATION

Device	Operating Temperature (Ambient)	Package	Design Load Current
TS317CZ	-20 to 85	TO-220	1.5A
TS317CM		TO-263	1.5A
TS317CT		TO-92	0.1A
TS317CP		TO-252	0.5A
TS317CW		SOT-223	0.5A
TS317CS		SOP-8	0.3A

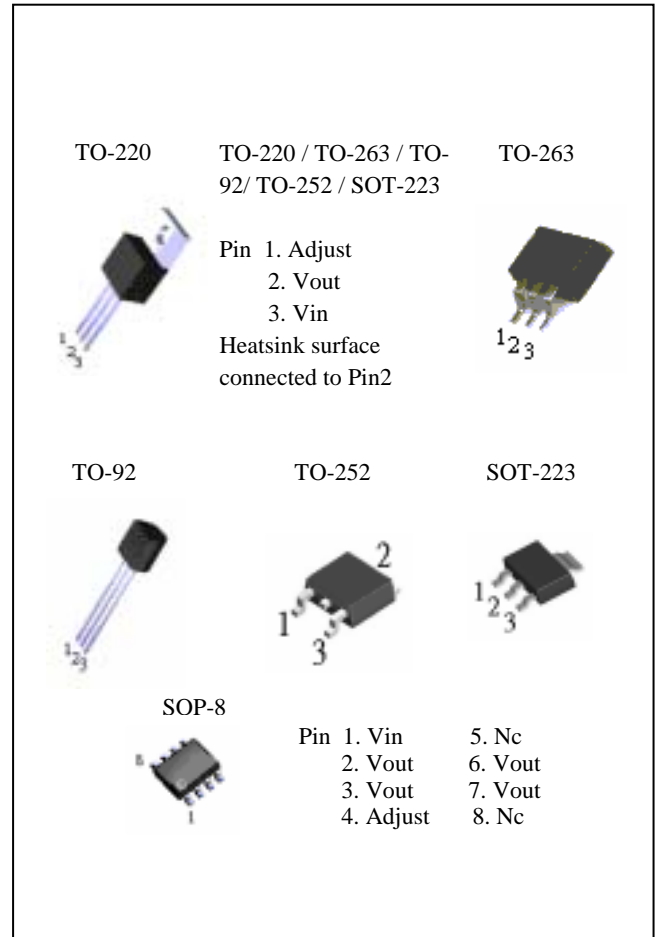

CIRCUIT SCHEMATIC

STANDARD APPLICATION

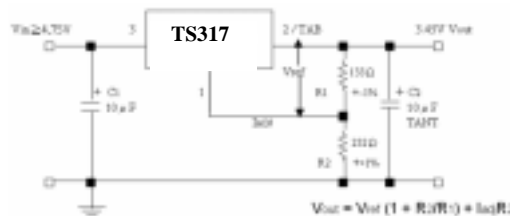

* = C_{in} is required if regulator is located an appreciable distance from power supply filter.

** = C_{o} is not needed for stability, however it does improve transient response.

$$V_{out} = 1.25 \text{ V} (1 + R_2 / R_1) + I_{Adj} R_2$$

Since I_{Adj} is controlled to less than 100 μA , the error associated with this term is negligible in most applications



TS317

3-Terminal Adjustable Output Positive Voltage Regulators

MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
Input-Output Voltage Differential	$V_I - V_O$	40	Vdc
Power Dissipation	P_D	Internally Limited	
Operating Junction Temperature Range	T_J	-20 to + 85	° C
Storage Temperature Range	T_{stg}	-65 to + 150	° C

TS317 ELECTRICAL CHARACTERISTICS

($V_I - V_O = 5.0V$; $I_O = 0.5A$ for TO-220 packages; $T_J = T_{low}$ to T_{high} [see Note 1]; I_{max} and P_{max} per Note 2; unless otherwise specified.)

NOTES:

CHARACTERISTIC	FIGURE	SYMBOL	MIN	TYP	MAX	UNIT
Line Regulation (Note 3) $T_A = 25^\circ C$, $3.0 V \leq V_I - V_O \leq 40 V$	1	REGline	--	0.01	0.04	%/V
Load Regulation (Note 3) $T_A = 25^\circ C$, $10 mA \leq I_O \leq I_{max}$, $V_O \leq 5.0 V$ $V_O \geq 5.0 V$	2	REGload	--	5.0 0.1	25 0.5	mV %V
Thermal Regulation ($T_A = 25^\circ C$) 20 ms Pulse			--	0.03	0.07	%/W
Adjustment Pin Current	3	I_{Adj}	--	50	100	μA
Adjustment Pin Current Change, $P_D \leq P_{max}$ $10mA \leq I_L \leq I_{max}$, $2.5V \leq V_I - V_O \leq 40V$	1.2	I_{Adj}	--	0.2	5.0	μA
Reference Voltage (Note 4), $P_D \leq P_{max}$ $10mA \leq I_O \leq I_{max}$, $3.0 V \leq V_I - V_O \leq 40 V$	3	V_{ref}	1.225	1.25	1.275	V
Line Regulation (Note 3), $3.0 V \leq V_I - V_O \leq 40V$	1	REGline	--	0.02	0.07	%/V
Current Limit ($V_{IN} - V_{OUT}$) $\leq 15V$ Package CZ, CM Package CW, CP Package CS Package CT				1.5 0.5 0.3 0.1		A
Temperature Stability ($T_{low} \leq T_J \leq T_{high}$)	3	T_S	--	1	--	%
Minimum Load Current to Maintain Regulation, ($V_I - V_O = 40 V$)	3	I_{Lmin}	--	3.5	10	mA
RMS Noise, % of V_O $T_A = 25^\circ C$, $10 Hz \leq f \leq 10 KHz$	--	N	--	0.003	--	%
Long-Term Stability, $T_J = T_{high}$ (Note 6) $T_A = 25^\circ C$ for Endpoint Measurements, 1000hrs	3	S	--	0.3	1.0	%
Thermal Resistance Junction to Case	--	$R_{\theta JC}$	--	5.0	--	°C/W

(1) $T_{low} = -20^\circ C$ $T_{high} = + 85^\circ C$

(2) $I_{max} = 1.5 A$ P_{max} : TO-220=20W, TO-263=3W, TO-252=2W, SOP-8=0.625W, TO-92=0.625W, SOT-23=0.625W

(3) Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

(4) Selected devices with tightened tolerance reference voltage available.

(5) C_{Adj} , when used, is connected between the adjustment pin and ground.

(6) Since Long-Term Stability cannot be measured on each device before shipment, this specification is an engineering estimate of average stability from lot to lot.

SCHEMATIC DIAGRAM

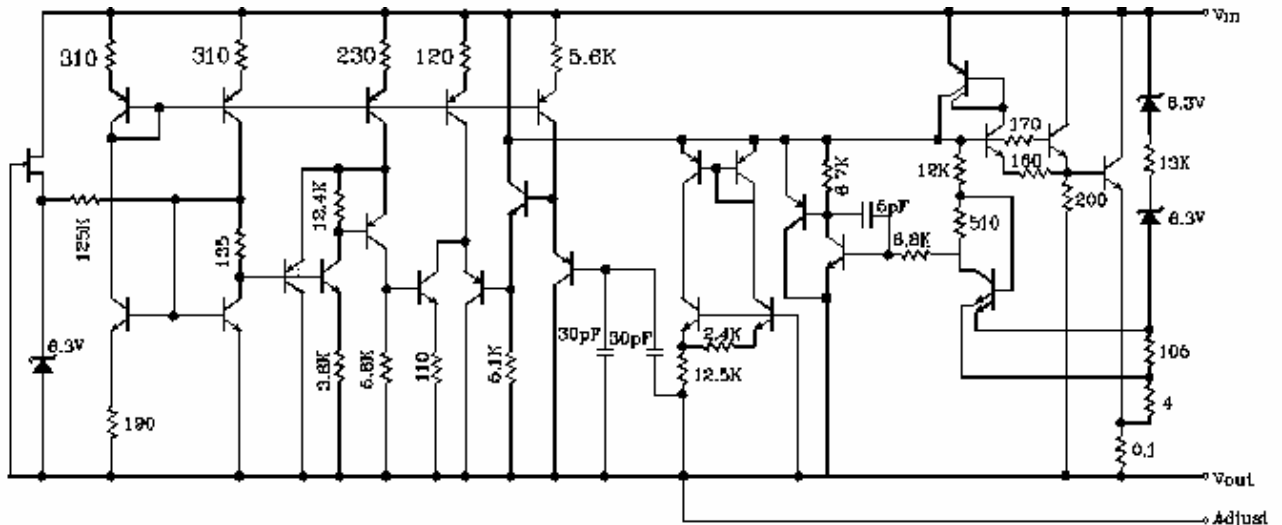


FIGURE 1- LINE REGULATION AND LINE TEST CIRCUIT

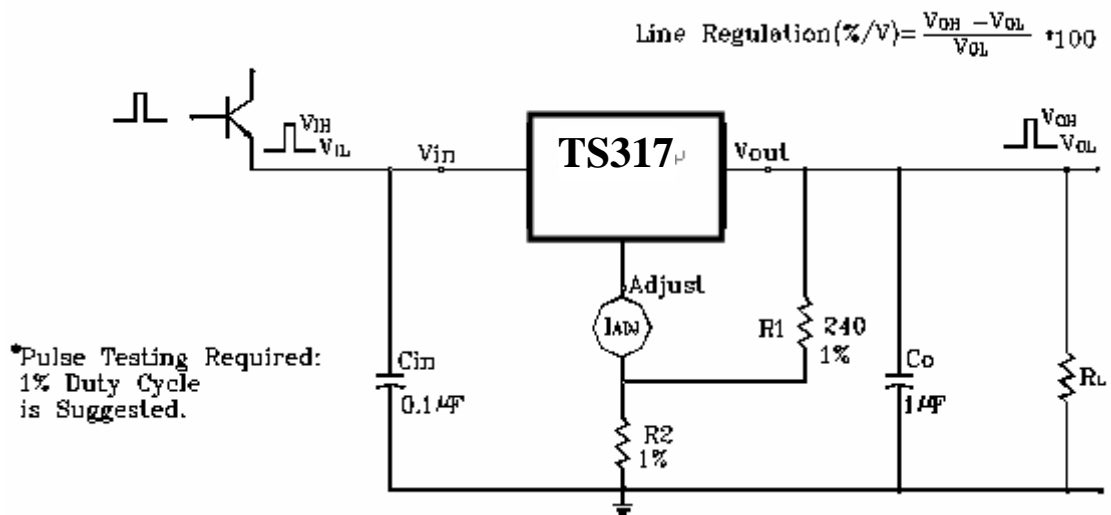


FIGURE 2 - LOAD REGULATION AND ΔL_{adj} /LOAD TEST CIRCUIT

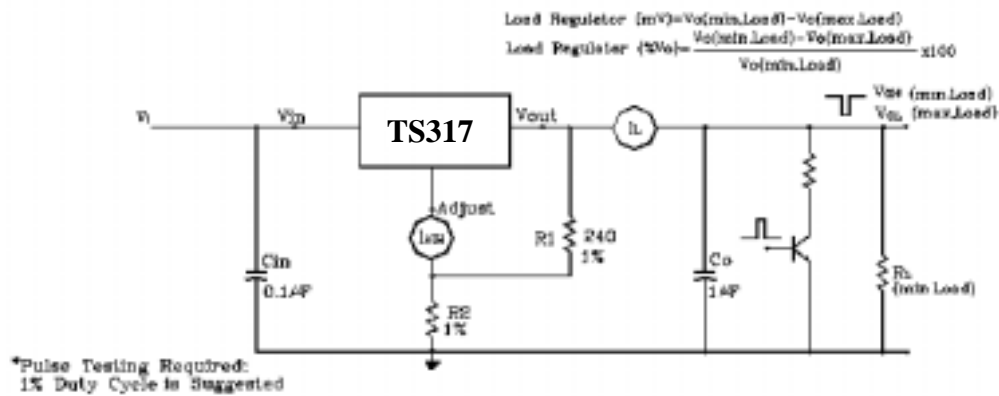


FIGURE 3 - STANDARD TEST CIRCUIT

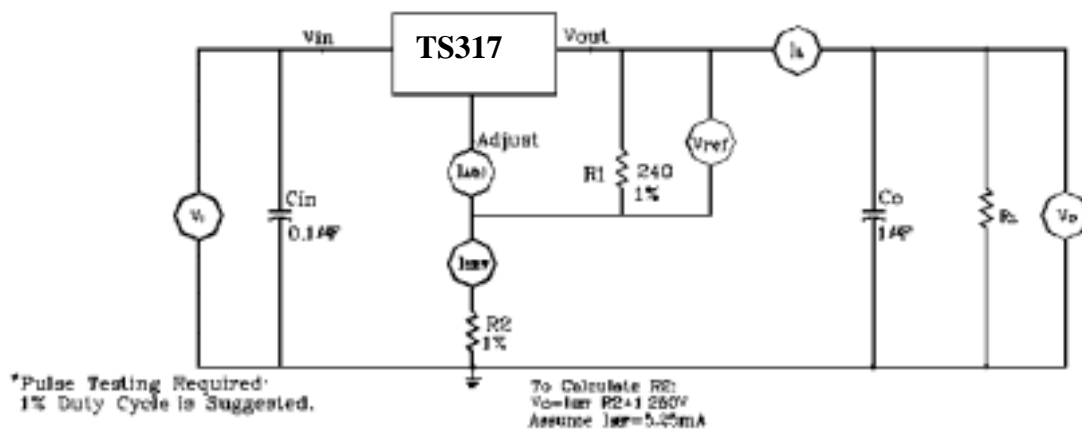


FIGURE 4 - RIPPLE REJECTION TEST CIRCUIT

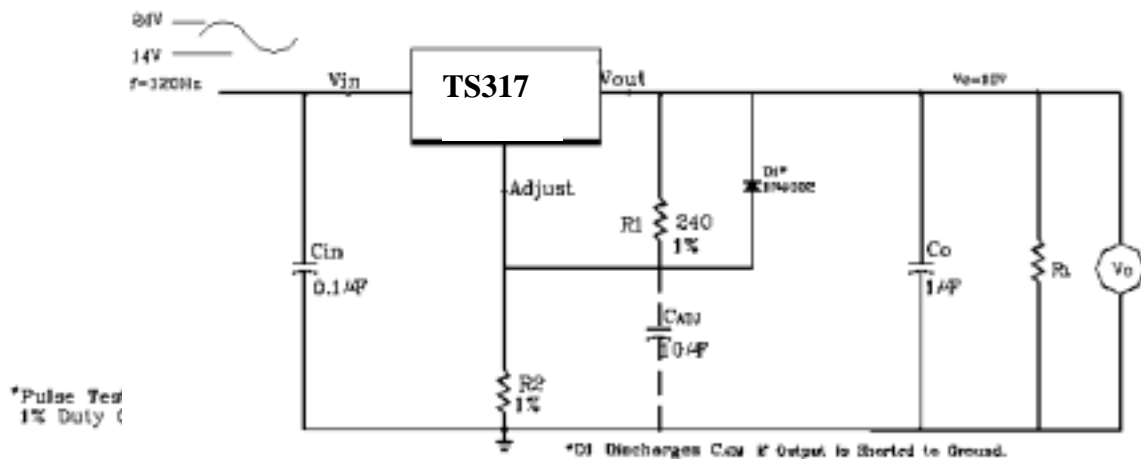


FIGURE 5-LOAD REGULATION

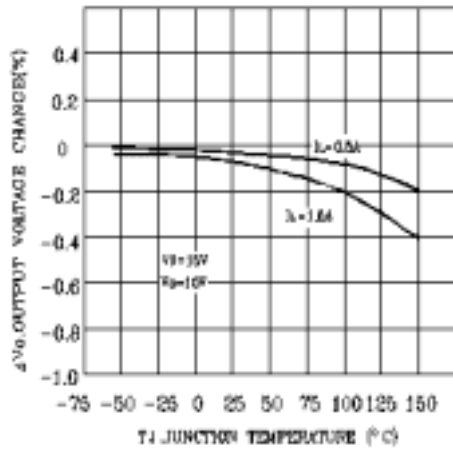


FIGURE 6-CURRENT LIMIT

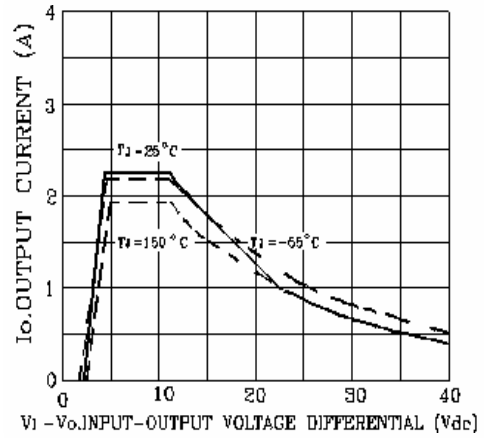


FIGURE 7-ADJUSTMENT PIN CURRENT

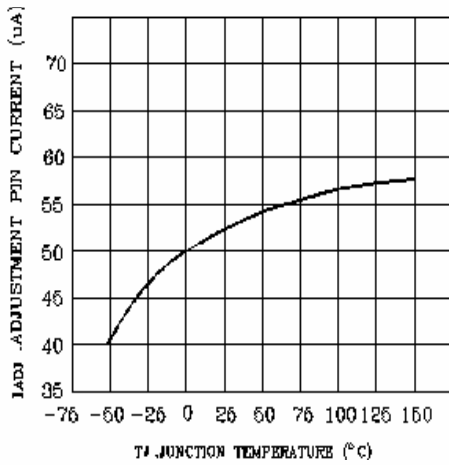


FIGURE 8-DROPOUT VOLTAGE

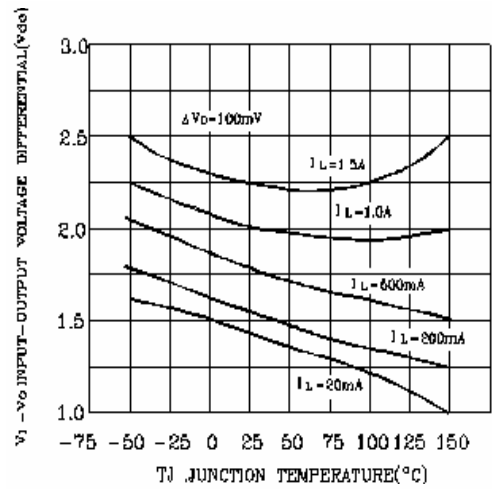


FIGURE 9-TEMPERATURE STABILITY

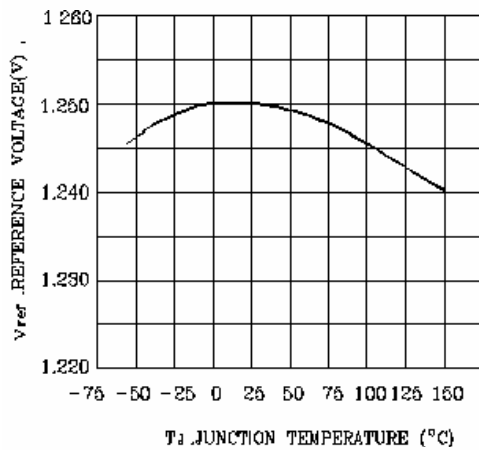


FIGURE 10-MINIMUM OPERATING CURRENT

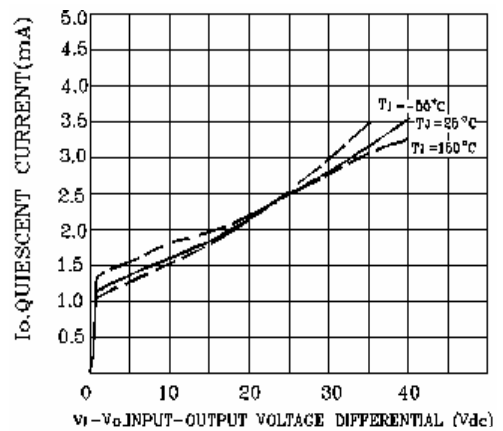


FIGURE 11-RIPPLE REJECTION versus OUTPUT VOLTAGE

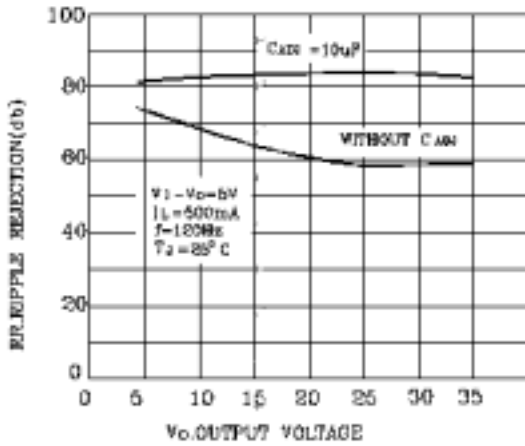


FIGURE 12-RIPPLE REJECTION versus OUTPUT CURRENT

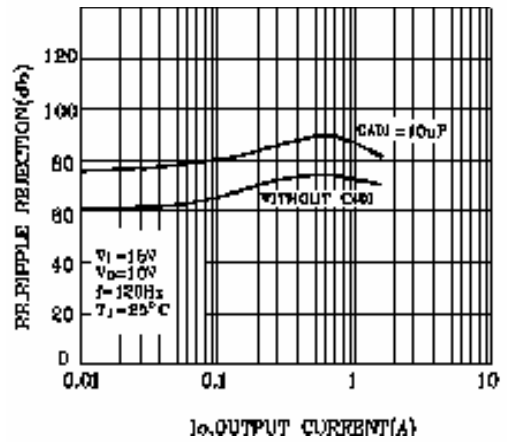


FIGURE 13-RIPPLE REJECTION versus FREQUENCY

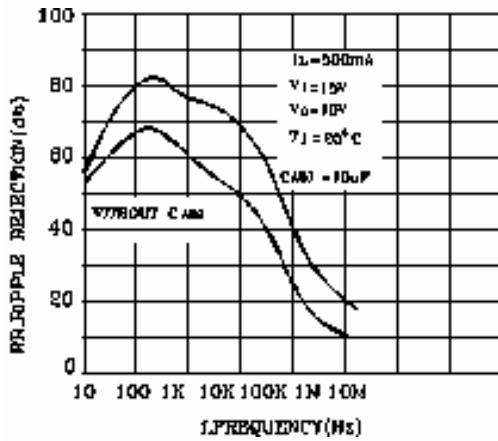


FIGURE 14-OUTPUT IMPEDANCE

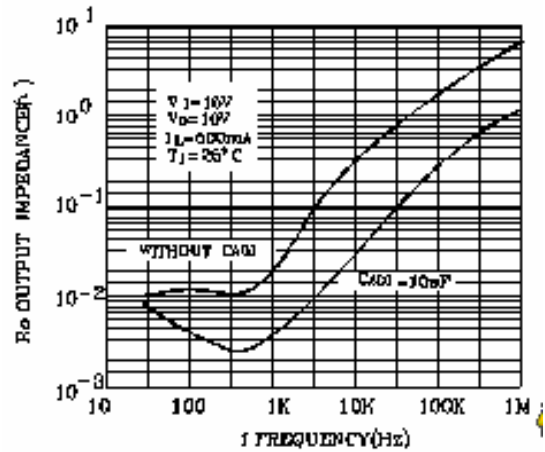


FIGURE 9-TEMPERATURE STABILITY


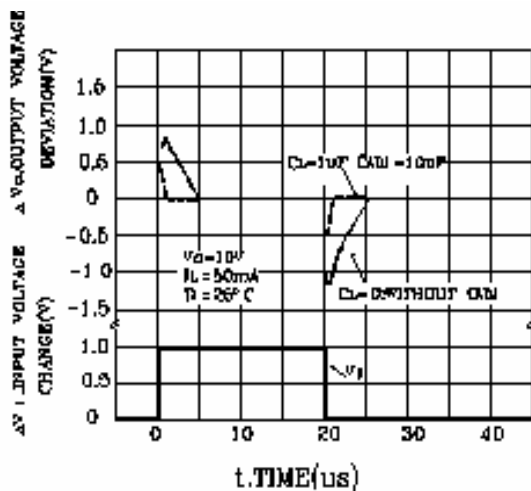


FIGURE 16-LOAD TRANSIENT RESPONSE

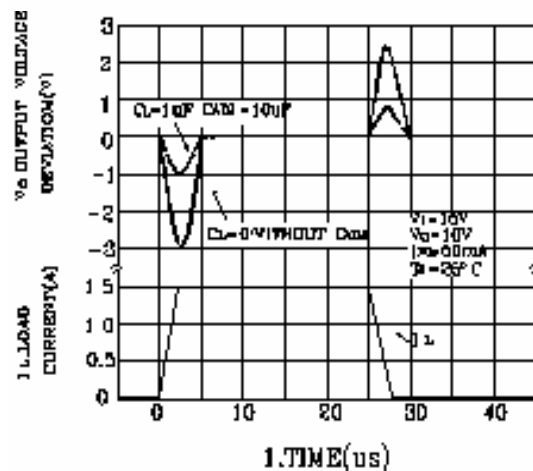

BASIC CIRCUIT OPERATION


The TS317 is a 3-terminal floating regulator. In operation, the TS317 develops and maintains a nominal 1.25 volt reference (V_{ref}) between its output and adjustment terminals. This reference voltage is converted to a programming current (I_{PROG}) by R_1 (see Figure 17), and this constant current flows through R_2 to ground. The regulated output voltage is given by:

$$V_{out} = V_{ref} (1 + R_2 / R_1) + I_{adj} R_2$$

Since the current from the adjustment terminal (I_{adj}) represents an error term in the equation, the TS317 was designed to control I_{adj} to less than 100 μA and keep it constant. To do this, all quiescent operating current is returned to the output terminal. This imposes the requirement for a minimum load current. If the load current is less than this minimum, the output voltage will rise.

Since the TS317 is a floating regulator, it is only the voltage differential across the circuit which is important to performance, and operation at high voltages with respect to ground is possible.

FIGURE 17 -BASIC CIRCUIT CONFIGURATION

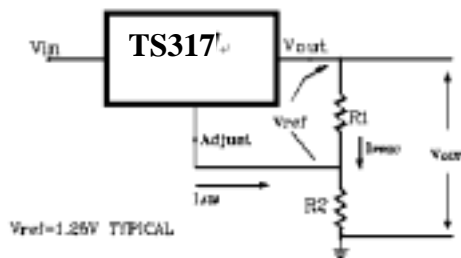

EXTERNAL CAPACITORS

A 0.1 μF disc or 1 μF tantalum input bypass capacitor (C_{in}) is recommended to reduce the sensitivity to input line impedance.

The adjustment terminal may be bypassed to ground to improve ripple rejection. This capacitor (C_{ADJ}) prevents ripple from being amplified as the output voltage is rejection about 15dB at 120 Hz in a 10 volt application.

Although the TS317 is stable with no output capacitance, like any feedback circuit, certain values of external capacitance can cause excessive ringing. An


output increased. A 10 μF capacitor should improve ripple capacitance (C_O) in the form of a 1 μF tantalum or 25 μF aluminum electrolytic capacitor on the output swamps this effect and insures stability.

PROTECTION DIODES

When external capacitors are used with any I.C. regulator it is sometimes necessary to add protection diodes to prevent the capacitors from discharging through low current points into the regulator.

Figure 18 shows the TS317 with the recommended protection diodes for output voltages in excess of 25 V or high capacitance values ($C_O > 25 \mu F$, $C_{ADJ} > 10\mu F$). Diode D_1 prevents C_O from discharging thru the I.C. during an input short circuit. Diode D_2 protects against capacitor C_{ADJ} discharging through the I.C. during an output short circuit. The combination of diodes D_1 and D_2 prevents C_{ADJ} from discharging through the I.C. during an input short circuit.

FIGURE 18 - VOLTAGE REGULATOR WITH PROTECTION DIODES

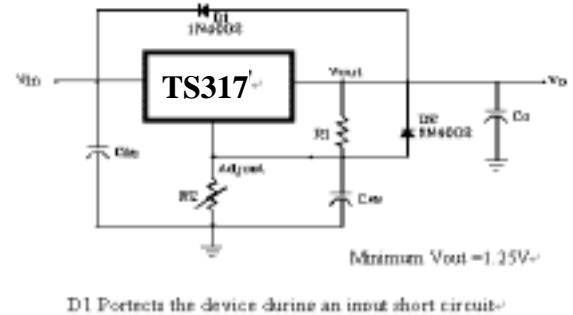

The TS317 is capable of providing extremely good load regulation, but a few precautions are needed to obtain maximum performance. For best performance, the programming resistor (R_1) should be connected as close to the regulator as possible to minimize line drops which effectively appear in series with the reference, thereby degrading regulation. The ground end of R_2 can be returned near the load ground to provide remote ground sensing and improve load regulation.

FIGURE 19 -"LABORATORY" POWER SUPPLY WITH ADJUSTABLE CURRENT LIMIT AND OUTPUT VOLTAGE

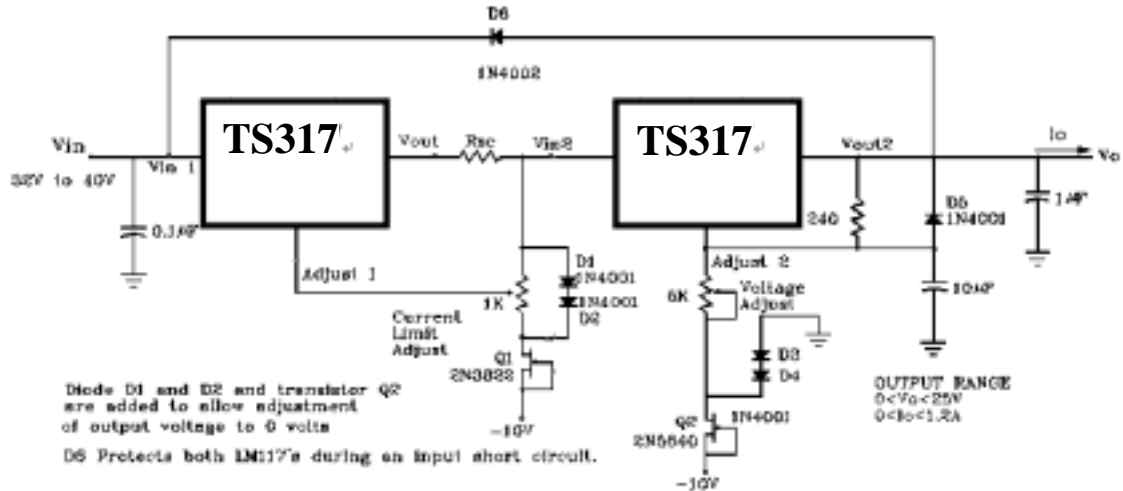


FIGURE 20-ADJUSTABLE CURRENT LIMITER

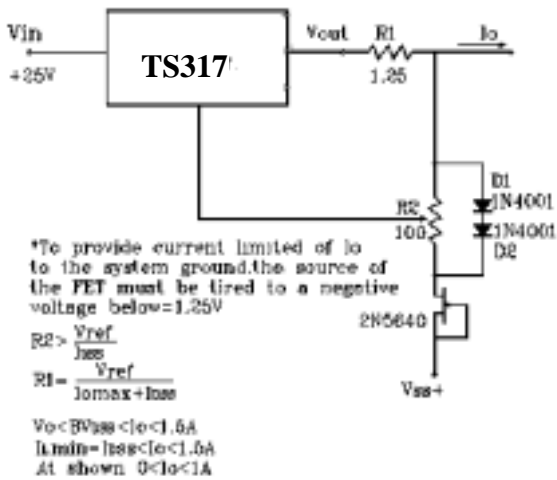


FIGURE 21-5V ELECTRONIC SHUT DOWN REGULATOR

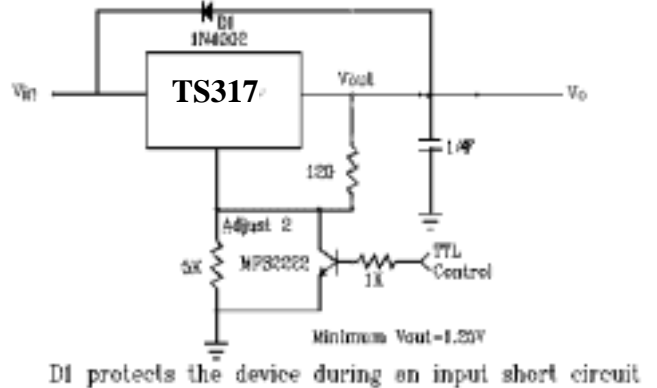


FIGURE 22-SLOW TURN-ON REGULATOR



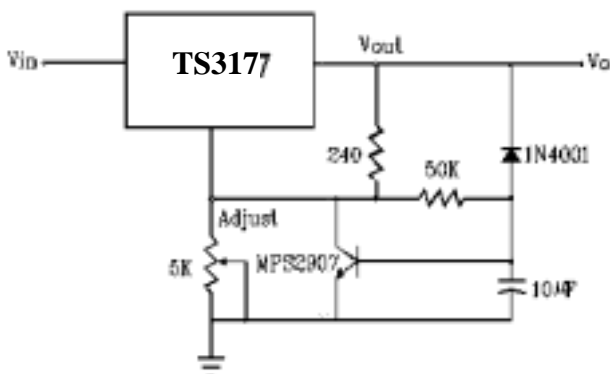


FIGURE 23-CURRENT REGULATOR

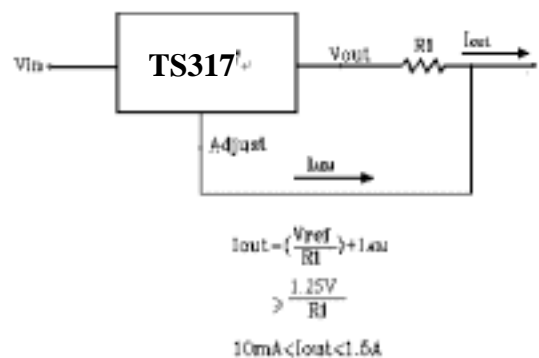

TO-220 Mechanical drawing


1-220 Unit:mm

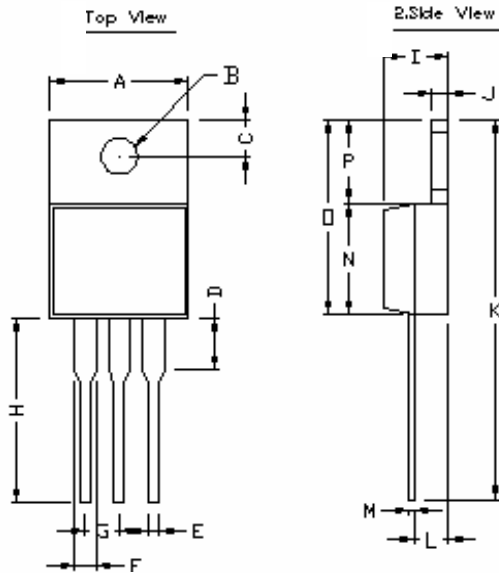

TO-220 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	10.00	10.50	0.394	0.413
B	3.24	4.44	0.128	0.175
C	2.44	2.94	0.096	0.116
D	3.565	4.315	0.140	0.170
E	0.68	0.92	0.027	0.036
F	1.115	1.485	0.044	0.058
G	2.345	2.715	0.092	0.107
H	13.49	14.31	0.531	0.563
I	4.475	5.225	0.176	0.206
J	1.15	1.39	0.045	0.055
K	27.78	29.62	1.094	1.166
L	2.175	2.925	0.086	0.115
M	0.297	0.477	0.012	0.019
N	8.28	8.80	0.326	0.346
O	14.29	15.31	0.563	0.603
P	6.01	6.51	0.237	0.256


TO-263 Mechanical drawing

1-263 Unit:mm

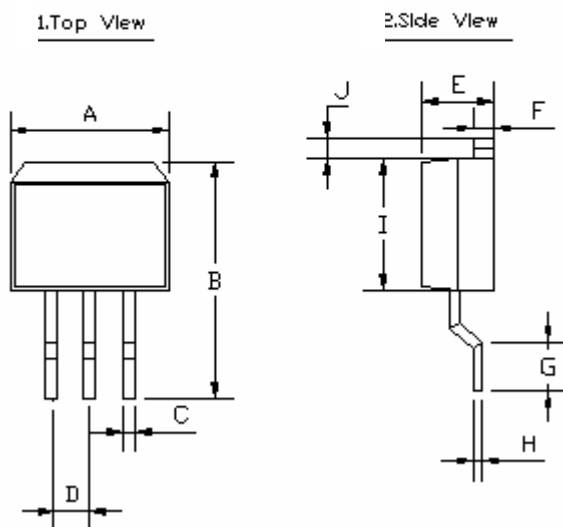

TO-263 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	10.00	10.50	0.394	0.413
B	14.60	15.87	0.575	0.625
C	0.68	0.92	0.027	0.036
D	2.42	2.66	0.095	0.105
E	4.31	4.83	0.170	0.190
F	1.14	1.40	0.045	0.055
G	2.28	2.79	0.090	0.110
H	0.45	0.73	0.018	0.029
I	8.28	8.80	0.326	0.346
J	1.14	1.4	0.045	0.055


TO-252 Mechanical drawing

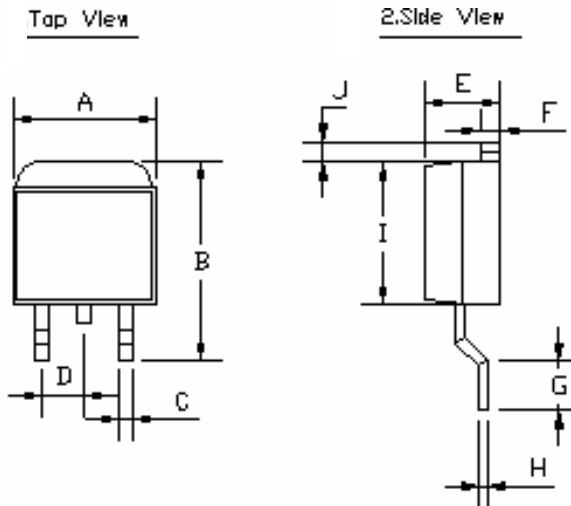

TO-252 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	10.23	10.28	0.403	0.405
B	9.92	9.96	0.391	0.392
C	0.50	0.54	0.020	0.021
D	1.83	1.96	0.072	0.077
E	4.59	4.61	0.180	0.181
F	0.49	0.51	0.019	0.020
G	1.15	1.22	0.045	0.048
H	0.43	0.47	0.017	0.019
I	5.37	5.40	0.211	0.213
J	1.33	1.39	0.052	0.055

SOT-223 Mechanical drawing

SOT-223 Unit:mm

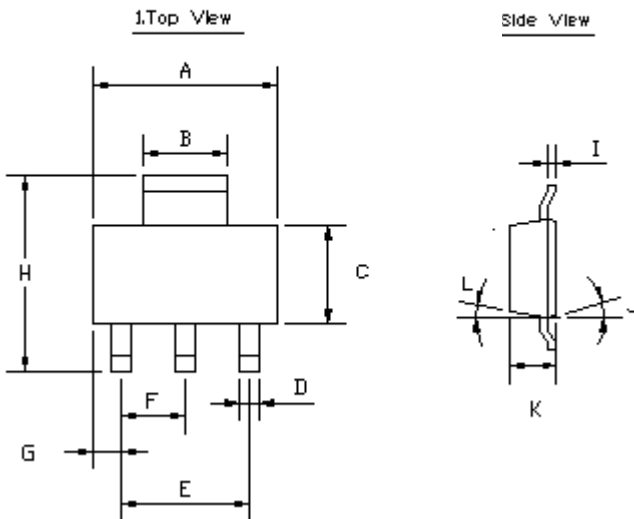


SOT-223 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	6.30	6.80	0.248	0.268
B	2.9	3.1	0.114	0.122
C	3.3	3.7	0.130	0.146
D	0.63	0.83	0.025	0.033
E	4.60	4.60	0.181	0.181
F	2.30	2.30	0.091	0.091
G	0.83	1.04	0.033	0.041
H	6.7	7.3	0.264	0.287
I	0.255	0.355	0.010	0.014
J	16°	16°	16°	16°
K	1.55	1.80	0.061	0.070
L	10°	10°	10°	10°

TS317


3-Terminal Adjustable Output Positive Voltage Regulators

SOP-8 Mechanical drawing

1.Top View

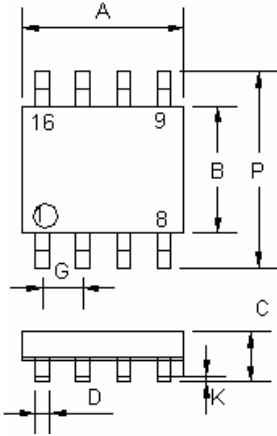

2.Side View




SOP-8 DIMENSION

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.80	5.00	0.189	0.196
B	3.80	4.00	0.150	0.157
C	1.35	1.75	0.054	0.068
D	0.35	0.49	0.014	0.019
F	0.40	1.25	0.016	0.049
G	1.27BSC		0.05BSC	
K	0.10	0.25	0.004	0.009
M	0°	7°	0°	7°
P	5.80	6.20	0.229	0.244
R	0.25	0.50	0.010	0.019


TO-92 Mechanical drawing

1-92 Unit:mm

Top View

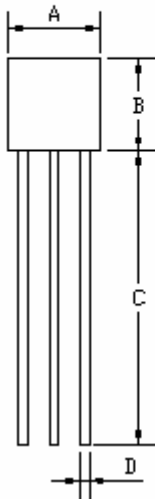

2.Side View



TO-92 DIMENSION

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.3	4.7	0.169	0.185
B	4.3	4.7	0.169	0.185
C	14.3	14.3	0.563	0.563
D	0.435	0.485	0.017	0.019
E	2.19	2.81	0.086	0.111
F	3.3	3.7	0.130	0.146
G	2.42	2.66	0.095	0.105
H	0.375	0.425	0.015	0.107