



## N-Channel JFETs

**J201      SST201**  
**J202      SST202**  
**J204      SST204**

<b>PRODUCT SUMMARY</b>				
Part Number	$V_{GS(off)}$ (V)	$V_{(BR)GSS}$ Min (V)	$g_{fs}$ Min (mS)	$I_{DSS}$ Min (mA)
J/SST201	-0.3 to -1.5	-40	0.5	0.2
J/SST202	-0.8 to -4	-40	1	0.9
J/SST204	-0.3 to -2	-25	0.5	0.2

### FEATURES

- Low Cutoff Voltage: J201 <1.5 V
- High Input Impedance
- Very Low Noise
- High Gain:  $A_v = 80 @ 20 \mu A$

### BENEFITS

- Full Performance from Low Voltage Power Supply: Down to 1.5 V
- Low Signal Loss/System Error
- High System Sensitivity
- High Quality Low-Level Signal Amplification

### APPLICATIONS

- High-Gain, Low-Noise Amplifiers
- Low-Current, Low-Voltage Battery-Powered Amplifiers
- Infrared Detector Amplifiers
- Ultra High Input Impedance Pre-Amplifiers

### DESCRIPTION



The J/SST201 series features low leakage, very low noise, and low cutoff voltage for use with low-level power supplies. The J/SST201 is excellent for battery powered equipment and low current amplifiers.

The J series, TO-226 (TO-92) plastic package, provides low cost, while the SST series, TO-236 (SOT-23) package, provides surface-mount capability. Both the J and SST series

are available in tape-and-reel for automated assembly (see Packaging Information).

For similar products in TO-206AA (TO-18) packaging, see the 2N4338/4339/4340/4341 data sheet.

For applications information see AN102 and AN106.

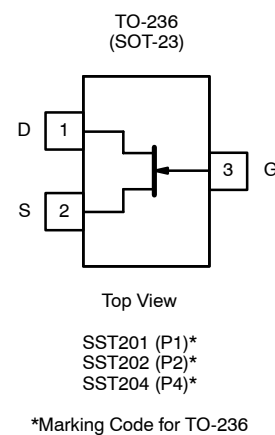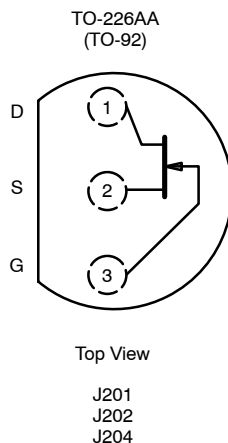



### ABSOLUTE MAXIMUM RATINGS

Gate-Drain, Gate-Source Voltage ..... -40 V  
 Gate Current ..... 50 mA  
 Lead Temperature (<sup>1</sup>/<sub>16</sub>" from case for 10 sec.) ..... 300°C  
 Storage Temperature ..... -55 to 150°C

Operating Junction Temperature ..... -55 to 150°C  
 Power Dissipation<sup>a</sup> ..... 350 mW

Notes  
 a. Derate 2.8 mW/°C above 25°C







SPECIFICATIONS (T <sub>A</sub> = 25°C UNLESS OTHERWISE NOTED)										
Parameter	Symbol	Test Conditions	Typ <sup>a</sup>	Limits						Unit
				J/SST201		J/SST202		J/SST204 <sup>c</sup>		
				Min	Max	Min	Max	Min	Max	
<b>Static</b>										
Gate-Source Breakdown Voltage	V <sub>(BR)GSS</sub>	I <sub>G</sub> = -1 μA, V <sub>DS</sub> = 0 V		-40		-40		-25		V
Gate-Source Cutoff Voltage	V <sub>GS(off)</sub>	V <sub>DS</sub> = 15 V, I <sub>D</sub> = 10 nA		-0.3	-1.5	-0.8	-4	-0.3	-2	
Saturation Drain Current <sup>b</sup>	I <sub>DSS</sub>	V <sub>DS</sub> = 15 V, V <sub>GS</sub> = 0 V		0.2	1	0.9	4.5	0.2	3	mA
Gate Reverse Current	I <sub>GSS</sub>	V <sub>GS</sub> = -20 V, V <sub>DS</sub> = 0 V T <sub>A</sub> = 125°C	-2		-100		-100		-100	pA
			-1						nA	
Gate Operating Current	I <sub>G</sub>	V <sub>DG</sub> = 10 V, I <sub>D</sub> = 0.1 mA	-2							pA
Drain Cutoff Current	I <sub>D(off)</sub>	V <sub>DS</sub> = 15 V, V <sub>GS</sub> = -5 V	2							
Gate-Source Forward Voltage	V <sub>GS(F)</sub>	I <sub>G</sub> = 1 mA, V <sub>DS</sub> = 0 V	0.7							V
<b>Dynamic</b>										
Common-Source Forward Transconductance	g <sub>fs</sub>	V <sub>DS</sub> = 15 V, V <sub>GS</sub> = 0 V f = 1 kHz		0.5		1		0.5		mS
Common-Source Input Capacitance	C <sub>iss</sub>	V <sub>DS</sub> = 15 V, V <sub>GS</sub> = 0 V f = 1 MHz	4.5							pF
Common-Source Reverse Transfer Capacitance	C <sub>rss</sub>		1.3							
Equivalent Input Noise Voltage	e <sub>n</sub>	V <sub>DS</sub> = 10 V, V <sub>GS</sub> = 0 V f = 1 kHz	6							nV/ √Hz

- Notes  
 a. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.  
 b. Pulse test: PW ≤ 300 μs duty cycle ≤ 3%.  
 c. See 2N/SST5484 Series for J204 and SST204 typical characteristic curves.







NPA, NH



**TYPICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$  UNLESS OTHERWISE NOTED)**

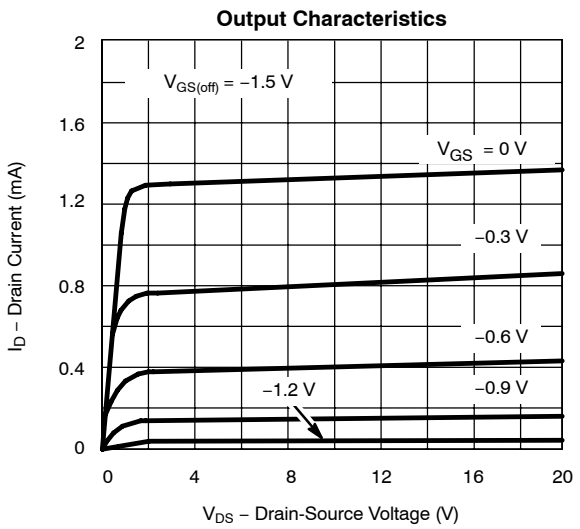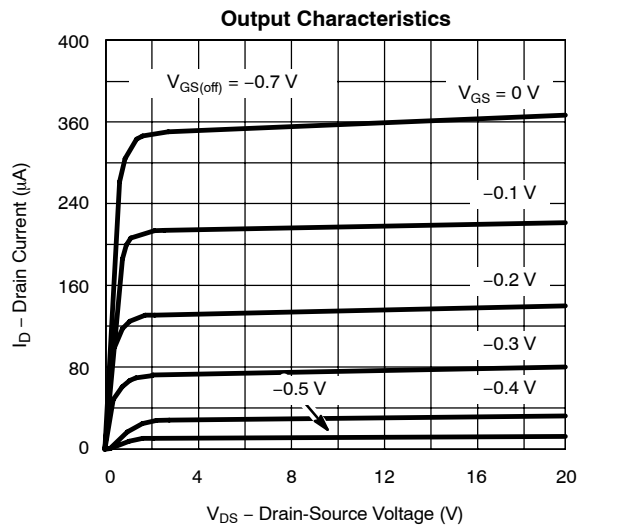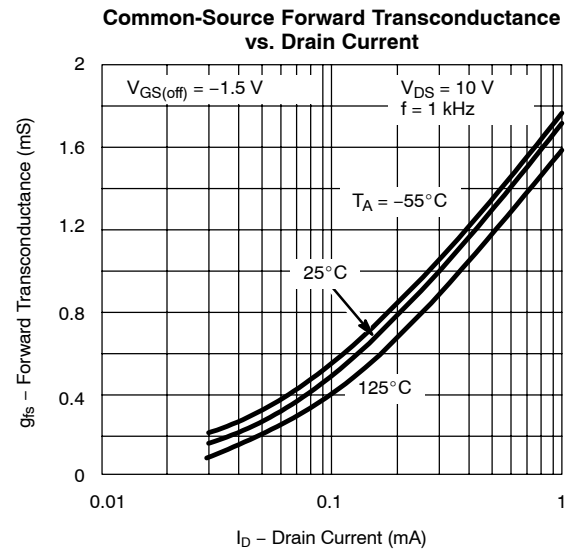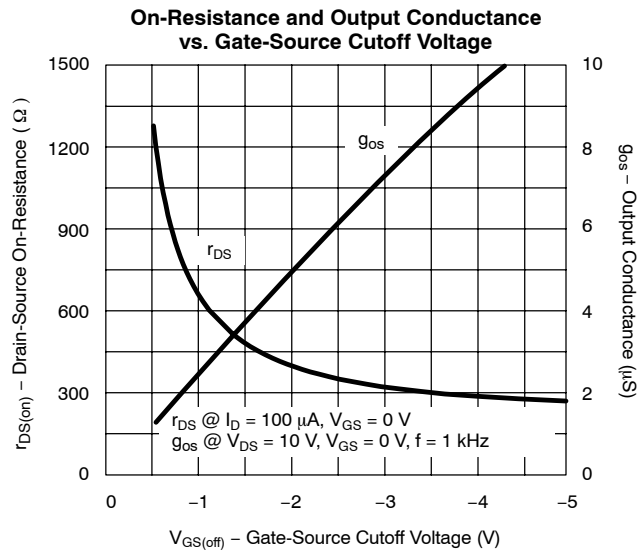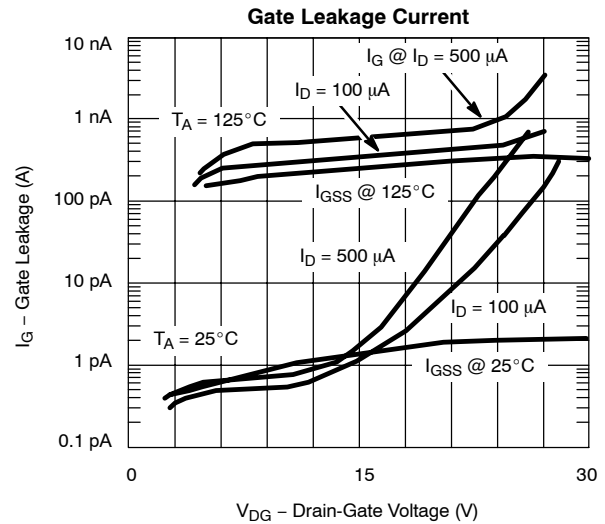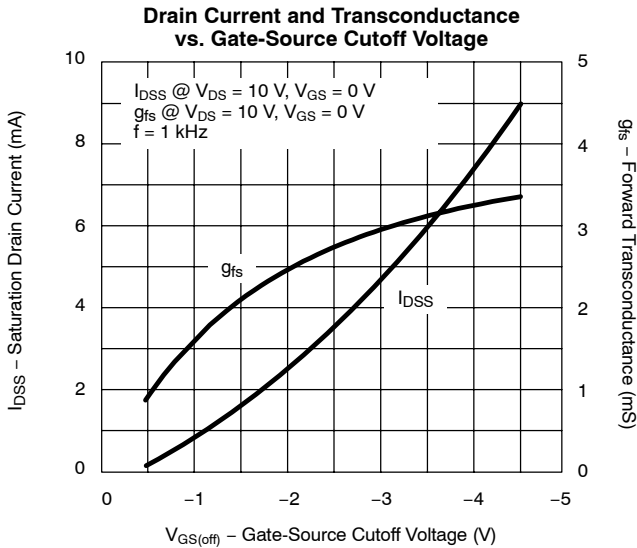


### TYPICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

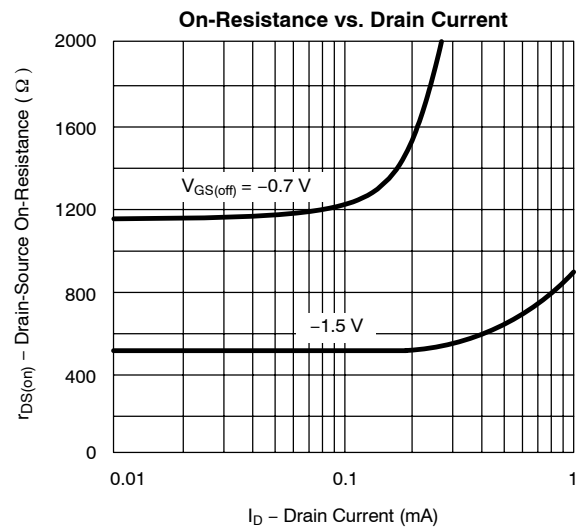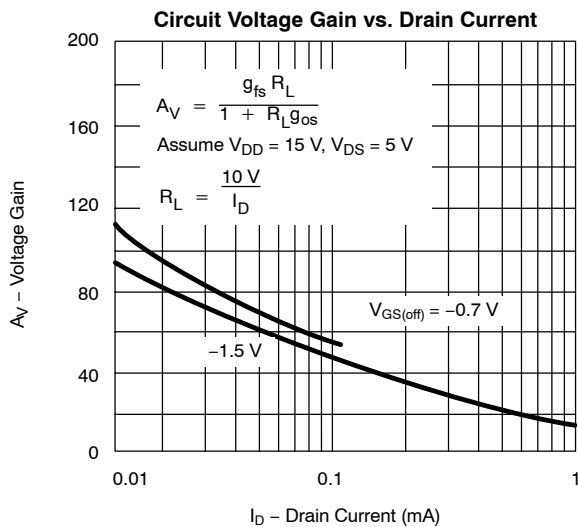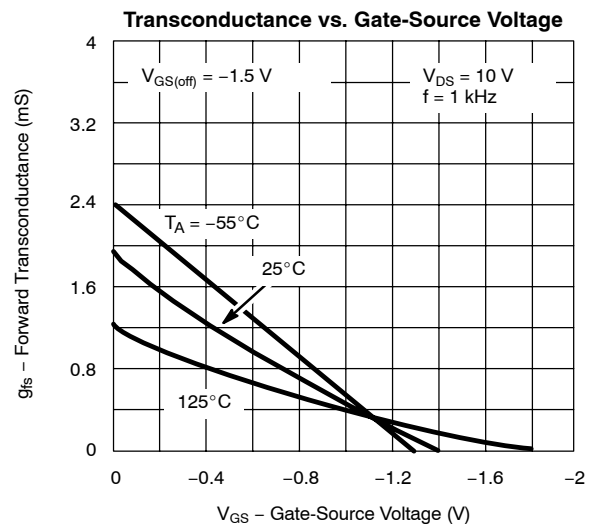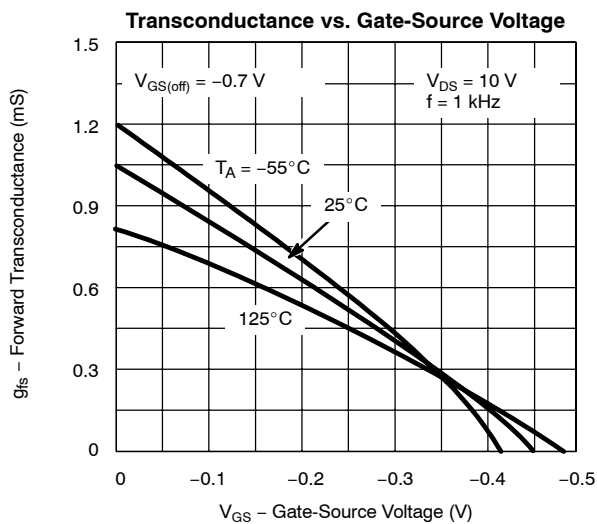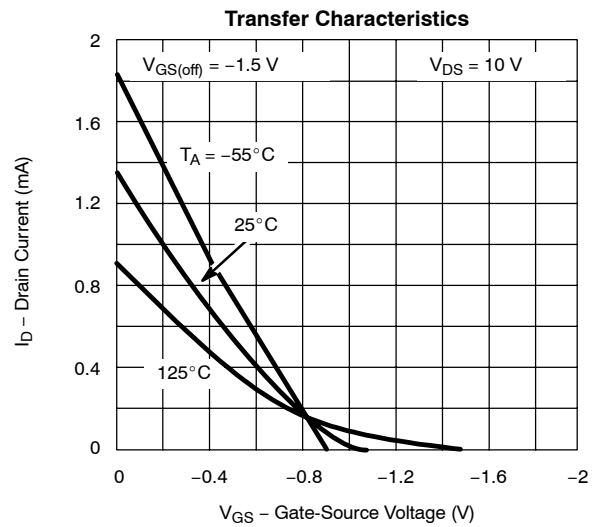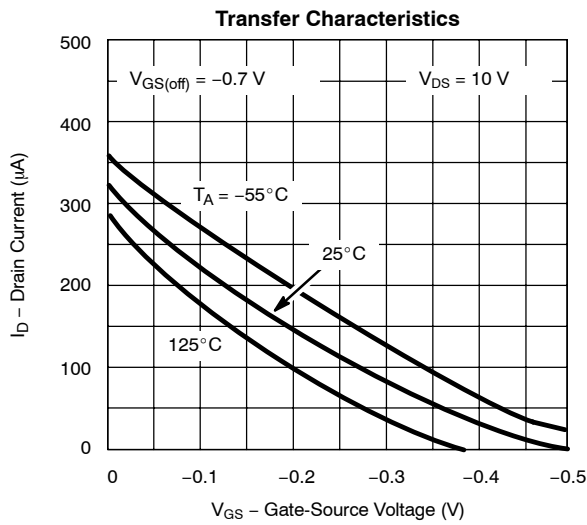




**TYPICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$  UNLESS OTHERWISE NOTED)**


**Common-Source Input Capacitance vs. Gate-Source Voltage**

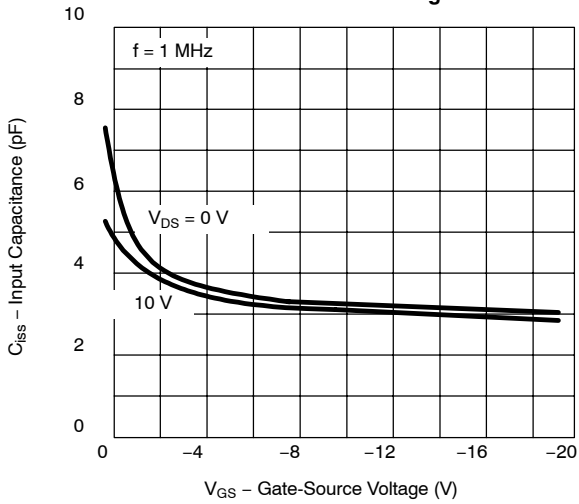


**Common-Source Reverse Feedback Capacitance vs. Gate-Source Voltage**

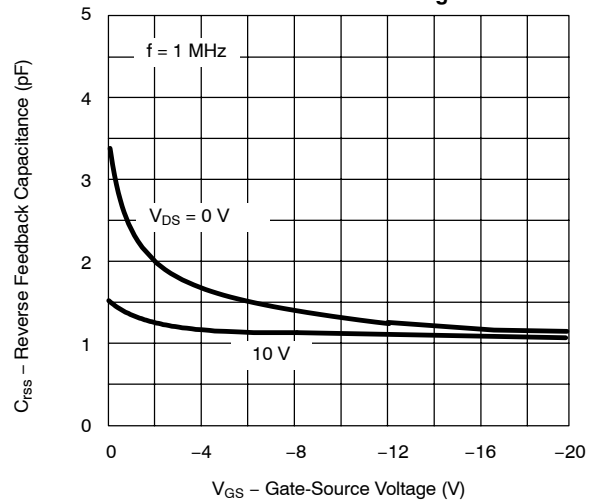


**Output Conductance vs. Drain Current**

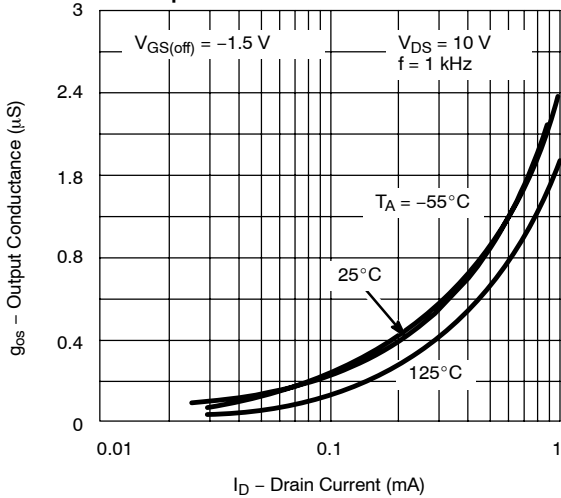


**Equivalent Input Noise Voltage vs. Frequency**

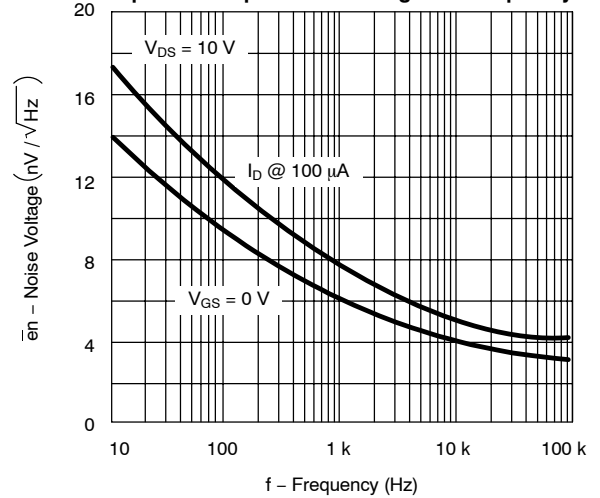

**Output Characteristics**

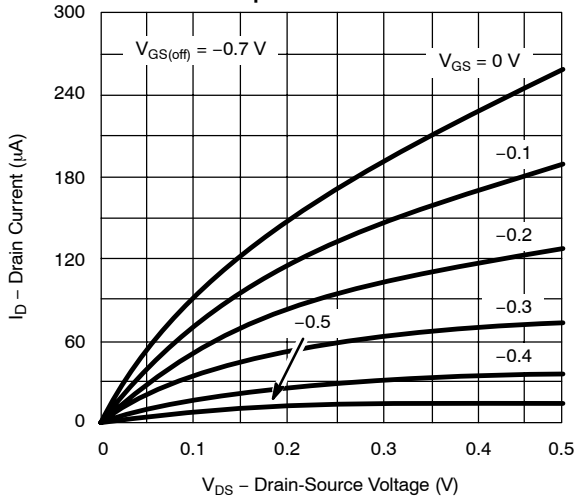

**Output Characteristics**

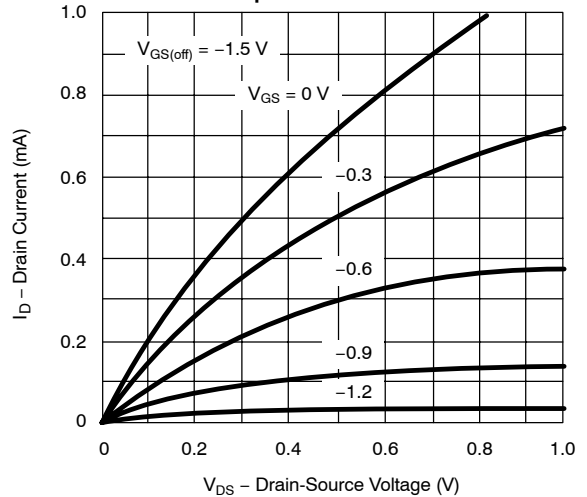



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.