

**Allt
mellan
antenn
och jord**

Datum 980218

PRODUKTINFORMATION FRÅN

ELFA



HÄMTFAX
+46 8 735 35 33



FAX ON DEMAND
+46 8 735 35 29



INTERNET
<http://www.elfa.se>

TEKNISK INFORMATION +46 8 735 35 15 ORDERTEL +46 8 735 35 35 ORDERFAX +46 8 730 30 88

— Vi reserverar oss mot fel samt förbehåller oss rätten till ändringar utan föregående meddelande —

ELFA artikelnr.

37-052-17 Relä NF2EB-12V/ NF2-12V

37-052-25 Relä NF2EB-24V/ NF2-24V

Antal sidor: 04


37-052-66 Relä NF4EB-12V/ NF4-12V

37-052-74 Relä NF4EB-24V/ NF4-24V

NAIS

FLATPACK AMBER RELAY WITH HIGH SENSITIVITY AND RELIABILITY

NF-RELAYS



mm inch

UL File No.: E43019 CSA File No.: LR26550

Sealed construction of the NFEB offers high reliability and prevents soldering flux vapors from entering the relay and condensing as an insulating film. So they are simple to clean with any degreaser and detergent cleaner due to the PBT case material, without affecting the maximum contact reliability of the relays.

SPECIFICATIONS

Contacts

Arrangement ¹⁾		2 Form C, 4 Form C	
Initial contact resistance (By voltage drop 6 V DC 1 A)	Max.	50 mΩ	
	Typical	25 mΩ	
Contact material	Movable contact	Gold-clad silver	
	Stationary contact	Gold-clad silver	
Rating, (resistive load)	Max. switching power	60 W 100 VA	
	Max. switching voltage	220 V AC, DC	
	Max. switching current	2 A	
UL/CSA rating (Suffix A is necessary for CSA)		0.5 A 125 V AC, 2 A 30 V DC, 0.25 A 220 V DC	
Expected life (min. operations)	Mechanical		10 ⁸
	Electrical (Resistive)	2 A 30 V DC	2 × 10 ⁵
		1 A 30 V DC	10 ⁶
		0.5 A 30 V DC	10 ⁷

¹⁾ MBB types available: 2MBB & 4MBB
(See next page for contact positions.)

Coil

Minimum operating power, at 25°C	2C	Approx. 190 mW
	4C	Approx. 310 mW
Nominal operating power, at 25°C	2C	Approx. 300 mW
	4C	Approx. 480 mW
Max. operating power for continuous duty		Approx. 1 W at 40°C 104°F

Remarks

- ¹⁾ Measurement at same location as "Initial breakdown voltage" section
²⁾ Detection current: 10 mA
³⁾ Excluding contact bounce time
⁴⁾ Half-wave pulse of sine wave: 11ms; detection time: 10μs
⁵⁾ Half-wave pulse of sine wave: 6ms
⁶⁾ Detection time: 10μs
⁷⁾ Refer to 5. Conditions for operation, transport and storage mentioned in
 AMBIENT ENVIRONMENT (Page 49)

Characteristics (at 25°C, 50% R.H. seal level)

Max. operating speed		50 cps	
Initial insulation resistance ^{*1}		1,000 MΩ at 500 V DC	
Electrostatic capacitance	Contact/Contact	Approx. 4 pF	
	Contact/Coil	Approx. 7 pF	
	Contact/Ground	Approx. 6 pF	
Initial breakdown voltage ^{*2}	Between open contacts	750 Vrms	
	Between contact sets	1,000 Vrms	
	Between live parts and ground	1,000 Vrms	
	Between contacts and coil	1,000 Vrms	
Operate time ^{*3} (at nominal voltage)		Max. 15 ms (Approx. 10 ms)	
Release time (without diode) ^{*3} (at nominal voltage)		Max. 10 ms (Approx. 3 ms)	
Contact bounce		Approx. 1.5 ms	
Shock resis- tance	Functional ^{*4}	In de-energized condition	Min. 29.4 m/s ² {3 G} (In contact direction) Min. 98 m/s ² {10 G} (perpendicular to contact)
		In energized condition	Min. 196 m/s ² {20 G}
	Destructive ^{*5}		Min. 980 m/s ² {100 G}
Vibration resis- tance	Functional ^{*6}	In de-energized condition	29.4 m/s ² {3 G}, 10 to 55 Hz at double amplitude of 0.5 mm (in contact direction) 98 m/s ² {10 G} 10 to 55 Hz at double amplitude of 1.6 mm (perpendicular to contact)
		In energized condition	117.6 m/s ² {12 G} 10 to 55 Hz at double amplitude of 2 mm
	Destructive		196 m/s ² {20 G}, 10 to 55 Hz at double amplitude of 3.3 mm
Conditions for operation, transport and storage ^{*7} (Not freezing and condens- ing at low temperature)		Ambient temp.	-40°C to +65°C -40°F to +149°F
		Humidity	5 to 85%R.H.
Unit weight	2C	Approx. 14 g .49 oz	
	4C	Approx. 15.5 g .55 oz	


TYPICAL APPLICATIONS

NF relays are widely acceptable in applications where small size and high sensitivity are required.

Such applications include: Electronic equipment, Household applications,

Alarm systems, Office machines, Communication equipment, Measuring equipment, Remote control systems, General control circuits, Machine tools, Industrial machinery, etc.

ORDERING INFORMATION



Contact arrangement	Type classification	MBB function	Coil voltage (DC)	Contact material
2: 2 Form C 4: 4 Form C	EB: Amber sealed type	Nil: Form C type 2M: 2MBB (2 Form D) 4M: 4MBB (4 Form D)	5, 6, 12, 24, 48 V	Nil: Gold-clad silver 1: Gold-cap over silver palladium

- (Notes) 1. For VDE recognized types, add suffix VDE.
 2. For UL/CSA recognized type, add suffix-A, as NF2EB-12V-A whose ground terminal is cut off.
 3. Standard packing Carton: 20 pcs.; Case: 200 pcs.

TYPES AND COIL DATA at 25°C 77°F



*Less than 1,000Ω: ±10%
 More than 1,000Ω: ±15%

Part No.	Nominal voltage, V DC	Pick-up voltage, V DC (max.)	Drop-out voltage, V DC (min.)	Max. allowable voltage, V DC (at 40°C)	Coil resistance, Ω	Nominal operating power, mW	Inductance, H	
							Armature	
							Open	Close
NF2EB-5V	5	4.0	0.5	8.7	90	278	0.071	0.071
NF2EB-6V	6	4.8	0.6	10.5	137	260	0.093	0.094
NF2EB-12V	12	9.6	1.2	21	500	290	0.338	0.344
NF2EB-24V	24	19.2	2.4	42	2,000	290	1.29	1.31
NF2EB-48V	48	38.4	4.8	84	7,000	330	4.12	4.18
NF4EB-5V	5	4.0	0.5	7	53	472	0.029	0.029
NF4EB-6V	6	4.8	0.6	8.5	90	400	0.070	0.071
NF4EB-12V	12	9.6	1.2	17.0	330	440	0.22	0.23
NF4EB-24V	24	19.2	2.4	34	1,200	480	0.77	0.79
NF4EB-48V	48	38.4	4.8	68	4,200	550	2.22	2.25

DIMENSIONS


mm inch

2 Form C


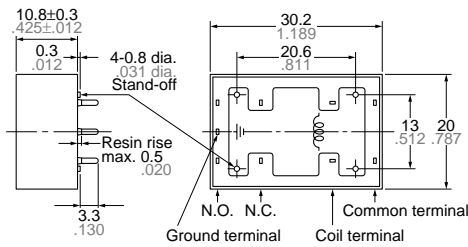


MBB contact position
 NF2-2M: terminal 6-7-8, 3-4-5

PC board pattern (Copper-side view)

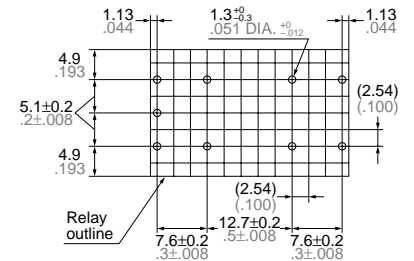


4 Form C

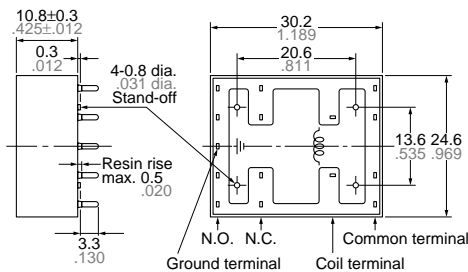

MBB contact position
 NF4-2M: terminals 6-7-8, 9-10-11
 NF4-2M: terminals 6-7-8, 3-4-5, 12-13-14, 9-10-11


PC board pattern (Copper-side view)

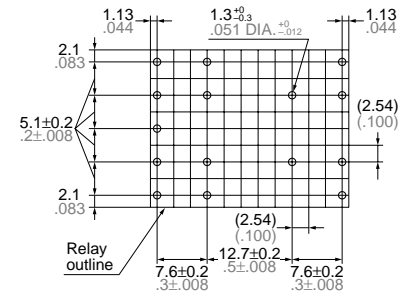


General tolerance: ±0.5 ±.020
 (Except for the cover height)

REFERENCE DATA


1. Life curve

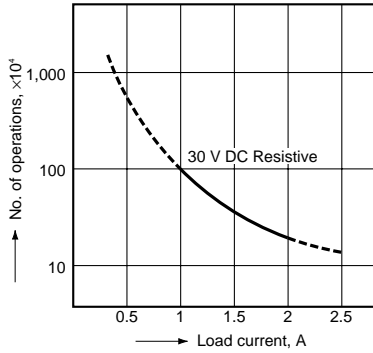

2. Coil temperature rise (resistance method)

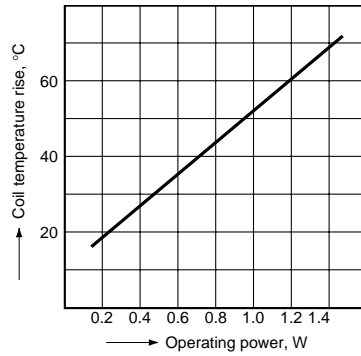


3. H₂S gas test

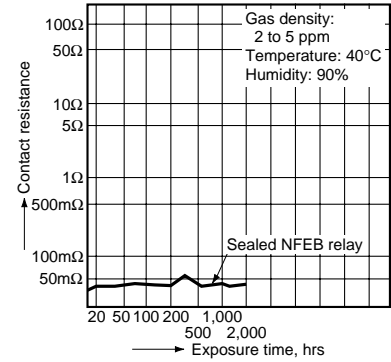

4. Contact reliability

Test conditions:

- Contact current/voltage: 10 μA 100 mV 1 kHz
- Cycle rate 20 cps.
- Miscontact detection level: 1 mW (= 100Ω)
- Detection method: Observation of all changeover contacts

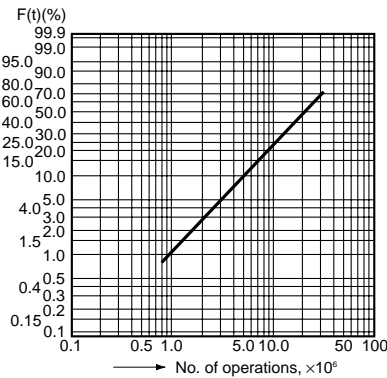

Test result:

$m = 1.5$
 $\mu = 21.2 \times 10^6$
 95% confidence level = 3.1×10^6
 17 contacts out of 20 achieved 10 million no miscontact operations.


5. High temperature test

Test conditions:

Ambient temperature: 80°C ±2°C

Test method:

- All contacts were switched for 100 operations on 2 A 30 V DC resistive load.
- Samples then were exposed to 80°C temperature for 5,000 hours, continuous.

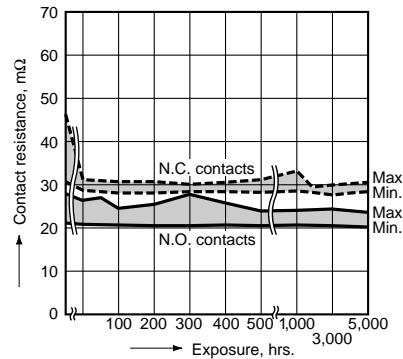

3. Contact resistance was measured with Hewlett-Packard testing equipment.

Test result:

Amber relays showed a stable spread of contact resistance within the initially specified 50 mΩ after 5,000 hours exposure.

For Cautions for Use, please download "Relay Technical Information" - RTI.pdf
 You'll find "RTI.pdf" in the download section of our web pages.