

rotronic

Datenblatt - Fiche technique - Data sheet

17.99.1122




**VALUE LCD-Arm Pneumatik, Wandmontage oder
Schraubklemmenbefestigung,**

VALUE Bras pneumatique LCD, fixation murale ou sur table,

VALUE LCD Monitor Arm Pneumatic, Wall Mount or Desk Clamp,

FLAT PANEL DISPLAY ARTICULATED ARM MOUNT INSTRUCTIONS

Part List:

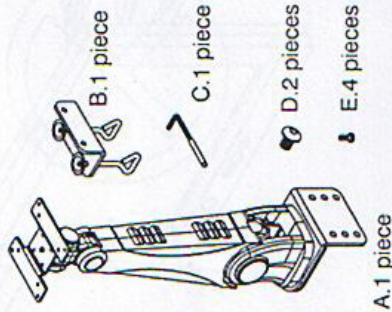

The unit fits VESA compatible Flat Panel Displays and comes with a combination 75/100mm VESA plate.


SAFETY NOTICE. If mounted on a wall, installation must be carried out by a competent Tradesperson using masonry bolts or other reliable fixings to ensure safe installation. Consult your builder or architect if in doubt.

If clamped to desktop follow instructions in 1. desktop fixing.

Not included are fixings for attaching wall plate to wall as these need to be selected for the building structure type.

Max load: 10 Kg


1. DESKTOP FIXING

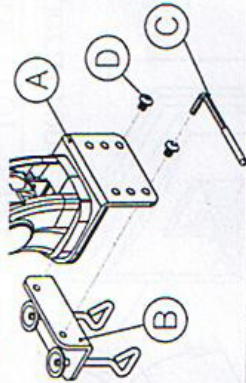

Locate C Clamp(B) and remove the 2 domed head allen screws(D). Fix the Articulated arm assembly(A) to the C Clamp by refitting the allen screws as shown. (Allen Key Tool supplied)

Ensure desktop is at least 30mm thick. Loosen off C Clamp and place onto desktop ensuring that unit locates against the side of the desk (Fig 5). Tighten C Clamp to lock mount to desktop.


2. Option: WALL FIXING

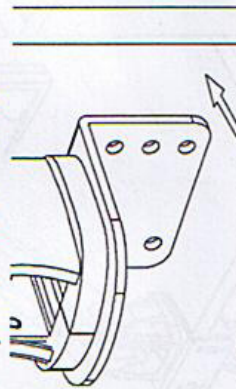

Observe Safety Notice .


Fix the Articulated arm assembly(A) to the wall using appropriate fixings (fixings not included).

3. ATTACHING THE FLAT PANEL

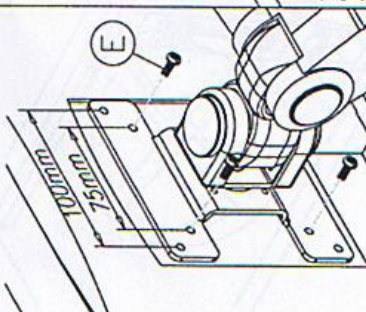

Attach the flat panel display to the articulated arm assembly(A) using screws(E).


4. ADJUSTING LOAD CAPACITY

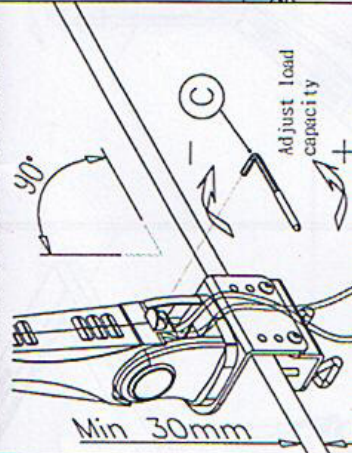


Adjust the load capacity by lifting the screw access cover at the base of the arm. The adjusting screw can be seen when the mount arm is put into a vertical position. Use the allen key tool to adjust the screw.

Clockwise to decrease load capacity
Anticlockwise to increase load capacity

5. ADJUSTING... < IF NECESSARY >


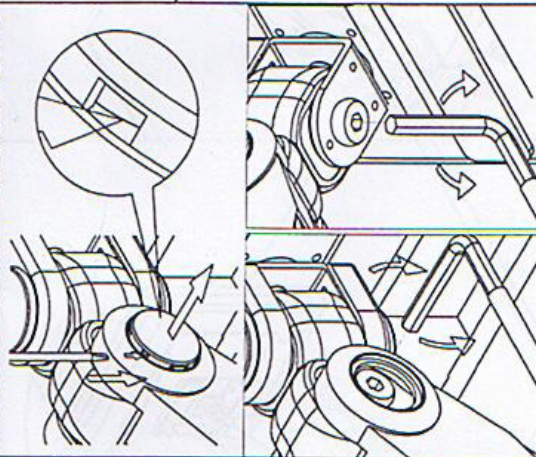


6. CABLE MANAGEMENT




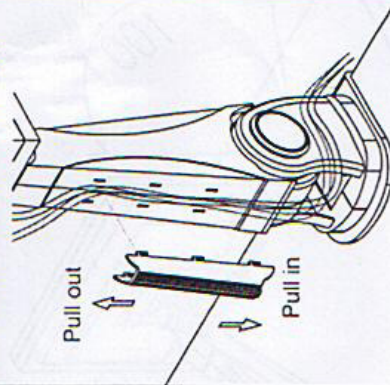



Thread cables through base of the arm and connect to the Flat Panel Display. Clip cable cover into position to tidy loose cables as shown.

Cautions

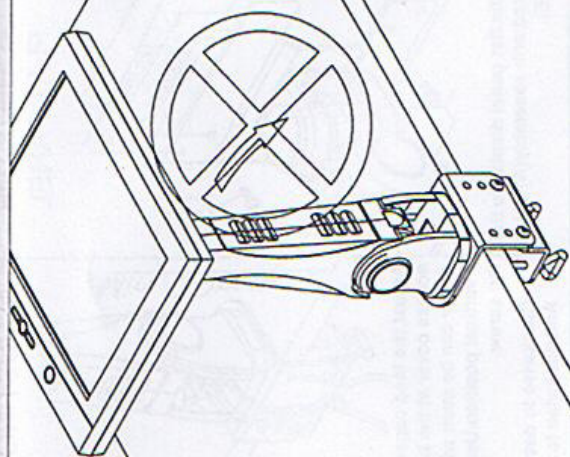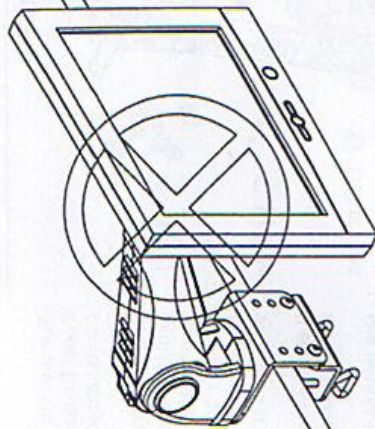

LCD Monitor Arm Operation

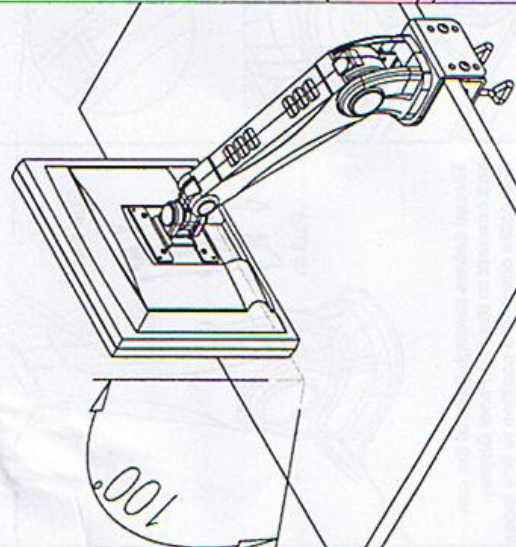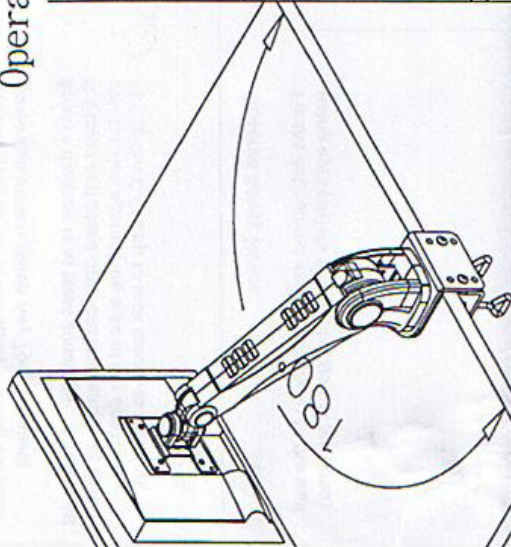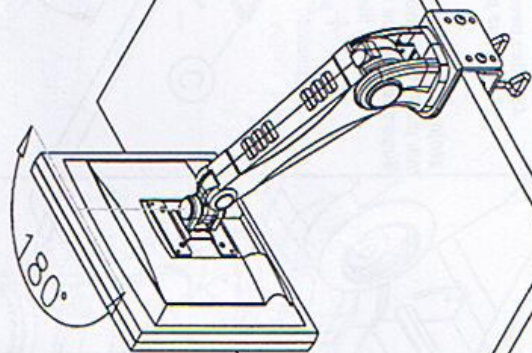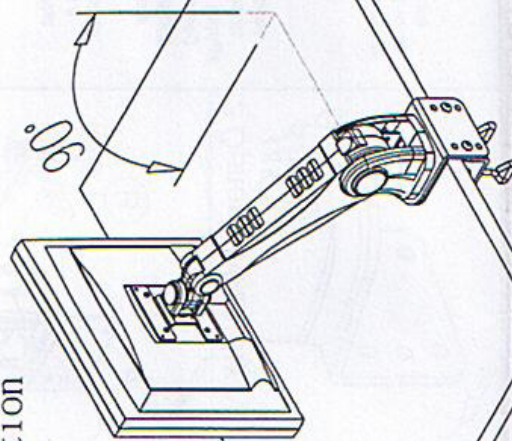

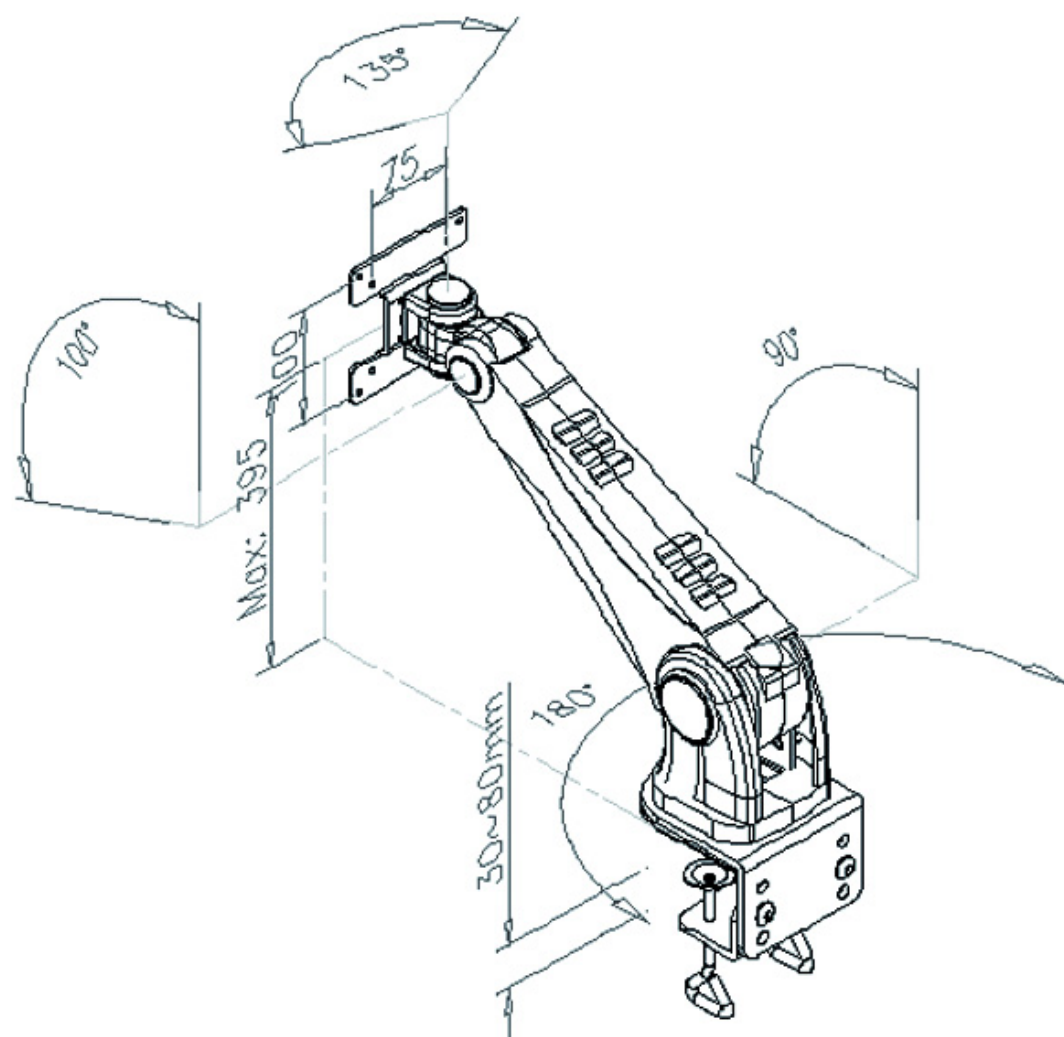

Enable 3D View