

03/Nov/2003

GENERAL SPECIFICATION

MODULE NO. :

DEM 16481 SBH-PW-N

CUSTOMER P/N

CHANGE DESCRIPTION	DATE
ORIGINAL VERSION	2002/12/13
ADDING VERSION	2003/07/15
PCB-DESIGN CHANGED	2003/10/20
	ADDING VERSION

PREPARED BY:	ZXD
APPROVED BY:	MH

DATE: 20/10/2003 DATE: 03/11/2003

CONTENTS

1. FUNCTIONS & FEATURES	2
2. MECHANICAL SPECIFICATIONS	2
3. BLOCK DIAGRAM	2
4. EXTERNAL DIMENSIONS	3
5. PIN ASSIGNMENT	3
6.1 PCB DRAWING AND DESCRIPTION	4
6.2 EXAMPLE APPLICATION	5
6.3 THE MODULE NO. IS PRINTED ON THE PCB	5
7. BACKLIGHT VOLTAGE AND CURRENT	б
8. DISPLAY DATA RAM	б
9. INSTRUCTION DESCRIPTION	7
10. INTERFACE WITH MPU	12
1) INTERFACE WITH 8-BIT MPU	
2) INTERFACE WITH 4-BIT MPU	
11. LCM INITIALIZING BY INSTRUCTION	13
11-1 8-BIT INTERFACE MODE	13
11-2 4-BIT INTERFACE MODE	14
12.MAXIMUM ABSOLUTE POWER RATINGS	
13.ELECTRICAL CHARACTERISTICS	15
13-1-1 DC CHARACTERISTICS	
13-2-1 AC CHARACTERISTICS	
13-2-2 WRITE MODE	18
13-2-3 READ MODE	18
14. FRAME FREQUENCY	
15. LCD MODULES HANDLING PRECAUTIONS	
16. OTHERS	20

1.FUNCTIONS & FEATURES

 DEM 16481 - Series LCD ty 	vpe:
---	------


Module	LCD TYPE	LCD-MODE				
DEM 16481 SBH-PW-N	STN Blue	Transmissive Negative				
Viewing Direction	: 6 O'clocl	-				
Driving Scheme	: 1/16 Dut	y Cycle, 1/5 Bias				
Power Supply Voltage	: 2.7 to 5.5	V (typ. 5V)				
V _{LCD} Adjustable For Best Cont	trast : 4.5V (typ	: 4.5V (typ.)				
Operating Temperature Range	: -20°C to	$: -20^{\circ}$ C to $+70^{\circ}$ C				
Storage Temperature Range	: -30°C to	$: -30^{\circ}$ C to $+80^{\circ}$ C				
LED-Backlight	: White LE	: White LED(Lightguide)				
Display Format	: 16 x 4 Ch	: 16 x 4 Characters				
Internal Memory	: CGROM	(8,320 bits)				
	: CGRAM	(64 x 8 bits)				
	: DDRAM	(80 x 8 bits)				
CGROM	: CGROM	of the KS0070B-00				
Interface	: Easy Inte	rface with a 4-bit or 8-bit M				

(Pls note that for extreme high and low temperatures the optics may slightly change, but is still readable.)

2. MECHANICAL SPECIFICATIONS

3. BLOCK DIAGRAM

•	Character Pitch	: 3.55 (W) x 5.35 (H) mm
۲	Character Size	: 2.95 (W) x 4.75 (H) mm
•	Character Font	: 5 x 8 dots
•	Dot Size	: 0.55 (W) x 0.55 (H) mm
•	Dot Pitch	: 0.60 (W) x 0.60 (H) mm

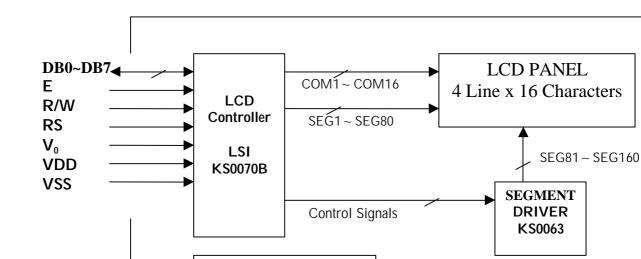

BACKLIGHT

A K

4. EXTERNAL DIMENSIONS


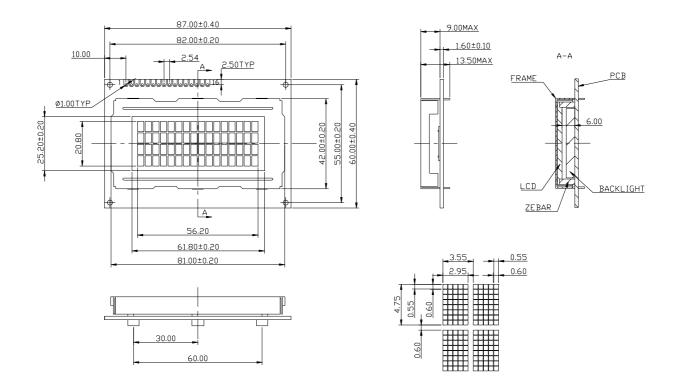


Figure 2.0

5. PIN ASSIGNMENT

Pin No.	Symbol	Function								
1	VSS	Ground terminal of module.								
2	VDD	Power terminal of module 2.7V to 5.5V.								
3	V0	Power Supply for liquid crystal drive.								
4	RS	Register select RS = 0 (Instruction register) RS = 1 (Data register)								
5	R/W	Read /Write R/W = 1 (Read) R/W = 0 (Write)								
6	Е	Read/Write Enable Signal								
7	DB0									
8	DB1									
9	DB2	Bi-directional data bus, data transfer is performed once, thru DB0 to								
10	DB3	DB7, in the case of interface data. Length is 8-bits; and twice, thru								
11	DB4	DB4 to DB7 in the case of interface data length is 4-bits. Upper four								
12	DB5	bits first then lower four bits.								
13	DB6									
14	DB7									
15	LED – (K)	Please also refer to 6.1 PCB drawing and description.								
16	LED + (A)	Please also refer to 6.1 PCB drawing and description.								

6.1 PCB DRAWING AND DESCRIPTION

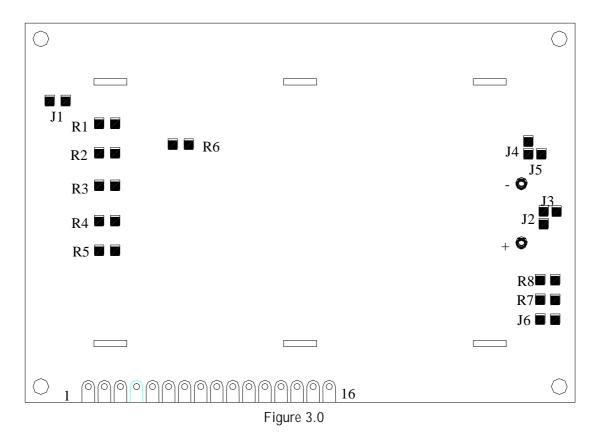

DESCRIPTION:

6-1-1. The polarity of the pin 15 and the pin 16 :

\sim	symbol	J3,J5	J2,J4	LED Polarity			
symbol	state	13,13	J2,J4	15 Pin	16 Pin		
J2,J4	Each solder-bridge	Each open		Anode	Cathode		
J3,J5	Each solder-bridge		Each open	Cathode	Anode		


6-1-2. The metal-bezel should be on ground when the J1 is solder-Bridge.

6-1-3. The LED resistor should be bridged when the J6 is solder-Bridge.


6-1-4.The R7 and the R8 are the LED resistor. (R7=15 Ω , R8=15 Ω).

6.2 Example application

6-2-1. The LED resistor can be bridged as following.



6-2-2. The 15 pin is the anode and the 16 pin is the cathode as following.



6-2-3. The 15 pin is the cathode and the 16 pin is the anode as following.



6-2-4. The metal-bezel is on ground as following.



6.3 The module No. is printed on the PCB.


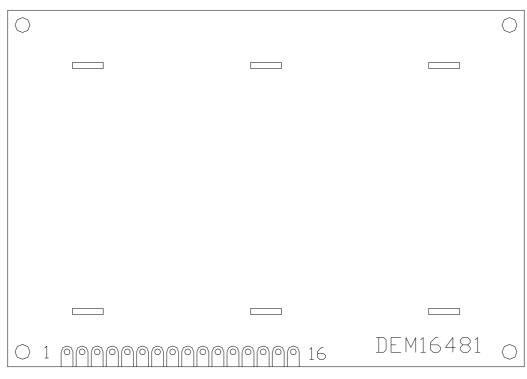


Figure 4.0

7. BACKLIGHT VOLTAGE AND CURRENT

White – Backlight

Item	Symbol	Standard Value	Unit	Applicable Terminal
Backlight Voltage	V	5	V	LED+/LED-
Backlight Current	Ι	~ 115	mA	LED+/LED-

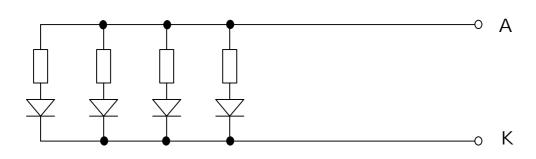

1 x 4 = 4 pcs LED

8. E	DISPLAY	DAI	ГА F	RAM	[(D]	DRA	M)				DI	ISPLA	Y PO	SITIO	n —				
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		
	FIRST LINE	00	01	02	03	04	05	06	07	80	09	0A	0B	0C	0D	0E	0F	-	DDRAM - ADDRESS
	SECOND LINE	40	41	42	43	44	45	46	47	48	49	4A	4B	4C	4D	4E	4F		
	THIRD LINE	10	11	12	13	14	15	16	17	18	19	1A	1B	1C	1D	1E	1F		
	FOURTH LINE	50	51	52	53	54	55	56	57	58	59	5A	5B	5C	5D	5E	5F		

9.INSTRUCTION DESCRIPTION

Outline

To overcome the speed difference between the internal clock of KS0070B and the MPU clock, KS0070B performs internal operations by storing control information to IR or DR. The internal operation is determined according to the signal from MPU, composed of read/write and data bus (refer to table 5.)

- Instruction can be divided largely into four kinds:
- (1) KS0070B function set instructions (set display methods, set data length, etc.)
- (2) Address set instructions to internal RAM.
- (3) Data transfer instructions with internal RAM.
- (4) Others.

The address of the internal RAM is automatically increased or decreased by 1.

*NOTE: During internal operation, busy flag (DB7) is read"1". Busy flag check must be preceded by the next instruction.

When you make an MPU program with checking the busy flag (DB7), it must be necessary 1/2 fosc for executing the next instruction by falling E signal after the busy flag (DB7) goes to "0".

Contents

1) Clear display

RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	0	0	0	0	0	0	0	1

Clear all the display data by writing "20H"(space code) to all DDRAM address, and set the DDRAM addresses to "00H" in the AC (address counter). Return cursor to original status, namely, bring the cursor to the left edge on first line of the display. Make entry mode increment (I/D="1").

2) Return home

	RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
F	0	0	0	0	0	0	0	0	1	Х

Return home is the cursor return home instruction.

Set DDRAM address to "00H" in the address counter. Return cursor to its original site and return display to its original status, if shifted. Contents of DDRAM does not change.

3) Entry mode set

RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	0	0	0	0	0	1	I/D	SH

Set the moving direction of cursor and display.

I/D: increment/decrement of DDRAM address is increased by 1.

When I/D="1", cursor/blink moves to right and DDRAM address is increased by 1.

When I/D="0", cursor/blink moves to left and DDRAM address is increased by 1.

CGRAM operates the same as DDRAM, when reading from or writing to CGRAM.

SH: shift of entire display

When DDRAM is in read (CGRAM read/write) operation or SH="0", shift of entire display is not performed.

If SH="1" and in DDRAM write operation, shift of entire display is performed according to I/D value (I/D="1":shift left, I/D="0": shift right).

4) Display ON/OFF control

RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	0	0	0	0	1	D	С	В

Control display/cursor/blink ON/OFF 1-bit register.

D: Display ON/OFF control bit

When D="1", entire display is turned on.

When D="0', display is turned off, but display data remains in DDRAM.

C: cursor or ON/OFF control bit

When C="1", cursor is turned on.

When C="0", cursor disappears in current display, but I/D register retains ints dat.

B: cursor blink ON/OFF control bit

When B="1", cursor blink is on, which performs alternately between all the "1" data and display characters at the cursor position.

When B="0", blink is off

5) Cursor or display shift

RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	0	0	0	1	S/C	R/L	Х	Х

Without writing or reading the display data, shift right/left cursor position or display.

This instruction is used to correct or search display data. (refer to table 40

During 2-line mode display, cursor moves to the 2^{nd} line after the 40st digit of the 1^{st} line.

Note tat display shift is performed simultaneously in all the lines.

When displayed data is shifted repeatedly, each line shifts individually.

When display shift is performed, the contents of the address counter are not changed.

Table 4. shift patterns according to S/C and R/L bits

S/C	R/L	operation
0	0	Shift cursor to the left, AC is decreased by 1
0	1	Shift cursor to the right, AC is decreased by 1
1	0	Shift all the display to the left, cursor moves according to the display
1	1	Shift all the display to the right, cursor moves according to the display

6) Function set

RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	0	0	0	DL	Ν	F	Х	Х

DL: Interface data length control bit

When DL="1", it means 8-bit bus mode with MPU.

When DL="0", it means 4-bit bus mode with MPU. So to speak, DL is a signal to select 8-bit or 4-bit bus mode. When 4-bit bus mode, it needs to transfer 4-bit data in two parts.

N: Display line number control bit When N="0", it means 1-line display mode. When N="1", it means 2-line display mode.

F: Display font type control bit When F="0", 5 x 7 dots format display mode. When F="1", 5 x 10 dots format display mode.

7) Set CGRAM address

RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	0	1	AC5	AC4	AC3	AC2	AC1	AC0

Set CGRAM address to AC.

THIS INSTRUCTION MAKES CGRAM data available from MPU.

8) Set DDRAM address

	RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
F	0	0	1	AC6	AC5	AC4	AC3	AC2	AC1	AC0

Set DDRAM address to AC

This instruction makes DDRAM data available from MPU.

When in 1-line display mode (N=0), DDRAM address is from "00H" to "4FH".

In 2-line display mode (N=1), DDRAM address in the 1st line is from "00H" to "27H", and DDRAM address in the 2nd line is from "40H" to "67H".

9) Read busy flag & address

	RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
ſ	0	0	BF	AC6	AC5	AC4	AC3	AC2	AC1	AC0

This instruction shows whether KS0070B is in internal operation or not. If the resultant BF is "1", it means the internal operation is in progress and your have to wait until BF is low. Then the next instruction can be performed. In this instruction your can also read the value of the address counter.

10) Write data to RAM

RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
1	0	D7	D6	D5	D4	D3	D2	D1	D0

Write binary 8-bit data to DDRAM/CGRAM .

The selection of RAM from DDRAM, and CGRAM, is set by the previous address set instruction: DDRAM address set, and CGRAM address set. RAM set instruction can also determine the AC direction to RAM.

After write operation, the address is automatically increased/decreased by 1, according to the entry mode.

Read data to RAM

RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
1	1	D7	D6	D5	D4	D3	D2	D1	D0

Read binary 8-bit data from DDRAM/CGRAM.

The selection of RAM is set by the previous address set instruction. If the address set instruction of RAM is not performed before this instruction, the data that is read first is invalid, because the direction of AC is not determined. If you read RAM data several times without RAM address set instruction before read operation, you can get correct RAM data. In the case of DDRAM read operation, cursor shift instruction plays the same role as DDRAM address set instruction; it also transfers RAM data to the output data register.

After read operation the address counter is automatically increased/decreased by 1 according to the entry mode. After CGRAM read operation, display shift may not be executed correctly.

In the case of RAM write operation, after this AC is increased/decreased by 1 like read operation. At his time, AC indicates the next address position, but your can read only the previous data by the read instruction.

					Instru	uction	Code					Execution
Instruction	RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	Description	time (fosc= 270kHz)
Clear Display	0	0	0	0	0	0	0	0	0	1	Write "20H" to DDRAM and set DDRAM address to "00H" from AC.	1.53 ms
Return Home	0	0	0	0	0	0	0	0	1	х	Set DDRAM address to "00H"from AC and return cursor to its original position if shifted.	1.53ms
Entry Mode set	0	0	0	0	0	0	0	1	I/D	SH	Assign cursor moving direction and enable the shift of entire display.	39us
Display ON/OFF Control	0	0	0	0	0	0	1	D	С	В	Set display (D), cursor(C), and blinking of cursor (B) on/off control bit.	39us
Cursor or Display shift	0	0	0	0	0	1	S/C	R/L	Х	X	Set cursor moving and display shift control bit, and the direction without changing of DDRAM data.	39us
Function set	0	0	0	0	1	DL	N	F	Х	X	Set interface data length (DL:4-bit/8- bit), numbers of display line (N:1- line/2-line, display font type (F:0)	39us
Set CGRAM address	0	0	0	1	AC5	AC4	AC3	AC2	AC1	AC0	Set CGRAM address in address counter.	39us
Set CGRAM address	0	0	1	AC6	AC5	AC4	AC3	AC2	AC1	AC0	Set DDRAM address in address counter.	39us
Read busy flag and address	0	1	BF	AC6	AC5	AC4	AC3	AC2	AC1	AC0	Whether during internal operation or not can be known by reading BF. The contents of address counter can also be read.	Ous
Write data to RAM	1	0	D7	D6	D5	D4	D3	D2	D1	D0	Write data into internal RAM (DDRAM/CGRAM).	43us
Read data to RAM	1	1	D7	D6	D5	D4	D3	D2	D1	D0	Read data into internal RAM (DDRAM/CGRAM).	43us


Table 5. instruction table

NOTE: when you make an MPU program with checking the busy flag (DB7), it must be necessary 1/2 Fosc for executing the next instruction by falling E signal after the busy flag (DB7) goes to "0".

10. INTERFACE WITH MPU

1) Interface with 8-bit MPU

When interfacing data length are 8-bit, transfer is performed all at once through 8-ports, from DB0 to DB7. An example of the timing sequence is shown below.

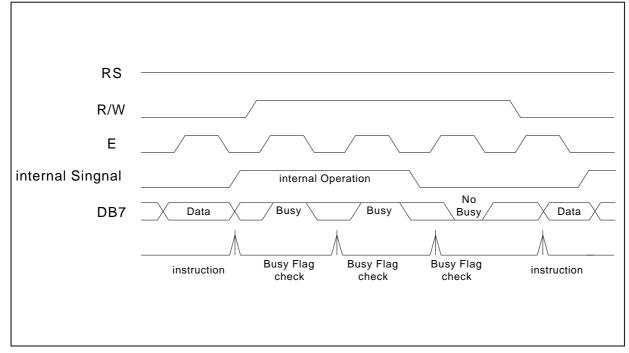


Example of 8-bit bus mode timing diagram

2) Interface with 4-bit MPU

When interfacing data length are 4-bit, only 4 ports, from DB4 to DB7, are used as data bus.

At first, higher 4-bit (in case of 8-bit bus mode, the contents of DB4 to DB7) are transferred, and then the lower 4-bit (in case of 8-bit bus mode, the contents of DB0 to DB3) are transferred. So transfer is performed in two parts. Busy flag outputs"1"after the second transfer are ended.


Example of timing sequence is shown below.

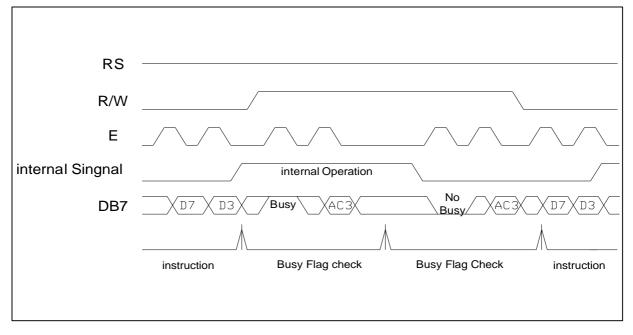

Example of 4-bit bus mode timing diagram

11. LCM INITIALIZING BY INSTRUCTION

11-1. 8-bit interface mode

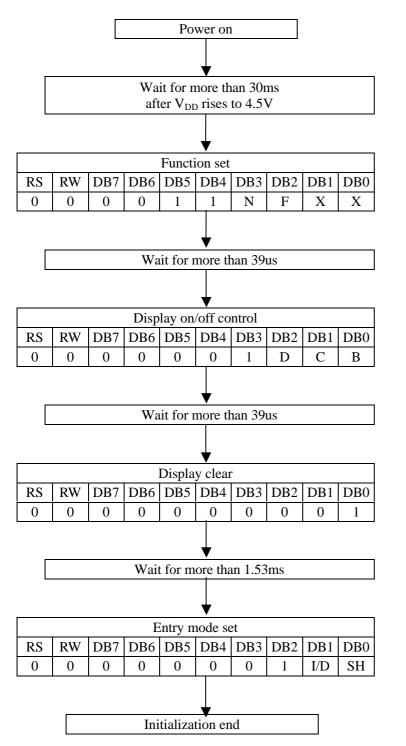

Condition: fosc=270khz


	0	1-line mode
Ν	1	2-line mode
F	0	5 x 7 dots
Г	1	5 x 10 dots

D	0	display off		
D	1	display on		
С	0	cursor off		
C	1	cursor on		
B	0	blink off		
D	1	blink on		

I/D	0	decrement mode
I/D	1	increment mode

сц	0	entire shift off
511	1	entire shift on

11-2. 4-bit interface mode

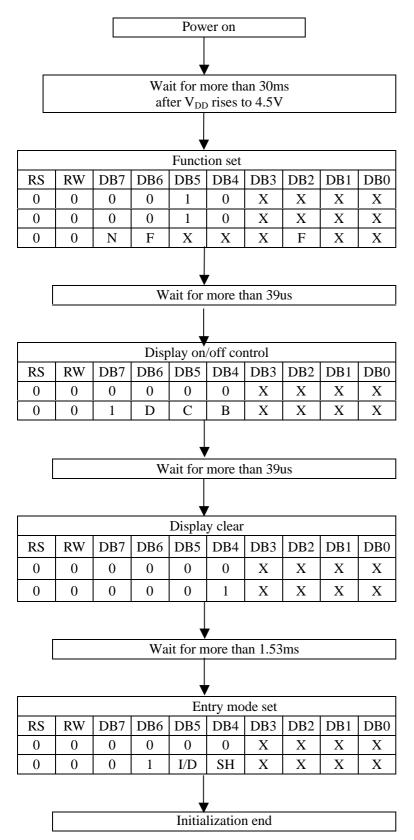

Condition: fosc=270khz

N	0	1-line mode
IN	1	2-line mode
Б	0	5 x 7 dots
Г	1	5 x 10 dots

D	0	display off
D	1	Display on
C	0	cursor off
C	1	cursor on
В	0	blink off
Ď	1	blink on

L/D	0	decrement mode
I/D	1	increment mode
SH	0	entire shift off
ы	1	entire shift on

12. MAXIMUM ABSOLUTE RATINGS

Item	Symbol	Standard value	Unit
Power supply voltage(1)	V _{DD}	-0.3 ~ +7.0	V
Power supply voltage(2)	V _{LCD}	V_{DD} -15.0 ~ V_{DD} +0.3	V
Input voltage	V _{IN}	$-0.3 \sim V_{DD} + 0.3$	V
Volt. For BL	VLED1	4 ~ 4.5	V
Operating temperature	Topr	-20 ~ +70	°C
Storage temperature	Tstg	-30 ~ +80	°C

13. ELECTRICAL CHARACTERISTICS

13-1-1 DC Characteristics (VDD = $4.5V \sim 5.5V$, Ta = $-20 \sim +70^{\circ}C$)

Item	Cauch al	Stan	dard Va	alue	Test	I I a i 4	
Item	Symbol	MIN	TYP	MAX	Condition	Unit	
Operating Voltage	V_{DD}	4.5		5.5		V	
	I _{DD1}		0.7	1.0	Ceramic oscillation fosc=250kHz		
Supply Current	I _{DD2}		0.4	0.6	Resistor oscillation external clock operation fosc=270kHz	mA	
Input Voltage(1)	V_{IL1}	-0.3		0.6		V	
(except OSC1)	V _{IH1}	2.2		V _{DD}		V	
Input Voltage(2)	V _{IL2}	-0.2		1.0		V	
(OSC1)	V _{IH2}	VDD-1.0		V_{DD}			
Output Voltage (1)	V _{OL1}			0.4	I _{OL} =1.2uA	V	
(DB0 to DB7)	V _{OH1}	2.4			I _{OH} =-0.205mA		
Output Voltage (2)	V _{OL2}			$0.1 V_{DD}$	I _{OL} =40uA	V	
(except DB0 to DB7)	V _{OH2}	0.9Vdd			I _{OH} =-40uA		
Voltage Drop	Vd _{COM}			1	$I_0 = \pm 0.1 \text{ mA}$	V	
voltage Drop	Vd _{SEG}			1	$10 - \pm 0.1 \text{ IIIA}$	v	
Input Leakage Current	I _{IL}	-1		1	$V_{IN}=0$ V to V_{DD}	uA	
Input Low Current	I _{IN}	-50	-125	-250	VIN=0V,VDD=5V(pull up)	uA	
Internal Clock (external Rf)	f _{IC}	190	270	350	$\begin{array}{l} Rf = 91k \pm 2\% \\ (V_{DD} = 5V) \end{array}$	kHz	
	f _{EC}	150	250	350		kHz	
External Clock	Duty	45	50	55		%	
	t _R ,t _F			0.2		us	
LCD Driving Voltage	VLCD	4.6		10.0	VDD-V5 (1/5 Bias)	V	

(CONTINUED)

$(VDD = 2.7V \sim 4.5V, Ta = -20 \sim +70^{\circ}C)$

Itom	Growbal	Stan	dard Va		Test	Luit	
Item	Symbol	MIN	TYP	MAX	Condition	Unit	
Operating Voltage	V _{DD}	2.7		4.5		V	
	I _{DD1}		0.3	0.5	Ceramic oscillation fosc=250kHz		
Supply Current	I _{DD2}		0.17	0.3	Resistor oscillation external clock operation fosc=270kHz	mA	
Input Voltage(1)	V_{IL1}	-0.3		0.4		V	
(except OSC1)	$V_{\rm IH1}$	$0.7 V_{DD}$		V_{DD}		V	
Input Voltage(2)	V _{IL2}			$0.2V_{\text{DD}}$		V	
(OSC1)	V_{IH2}	$0.7 V_{\text{DD}}$		V_{DD}		V	
Output Voltage (1)	V _{OL1}			0.4	I _{OL} =0.1mA	V	
(DB0 to DB7)	V _{OH1}	2.0			I _{OH} =-0.1mA		
Output Voltage (2)	V _{OL2}			0.2Vdd	I _{OL} =40uA	V	
(except DB0 to DB7)	V _{OH2}	0.8Vdd			I _{OH} =-40uA		
Voltage Dron	Vd _{COM}			1	$I_0 = \pm 0.1 \text{ mA}$	17	
Voltage Drop	Vd _{SEG}			1.5	$10 = \pm 0.1 \text{ mA}$	V	
Input Leakage Current	I _{IL}	-1		1	$V_{IN}=0$ V to VDD	uA	
Input Low Current	I _{IN}	-10	-50	-120	VIN=0V,VDD=3V(pull up)	uA	
Internal Clock (external Rf)	f _{IC}	190	250	350	$\begin{array}{c} Rf = 75k \pm 2\% \\ (V_{DD} = 3V) \end{array}$	kHz	
	f _{EC}	125	270	350		kHz	
External Clock	Duty	45	50	55		%	
	t _R ,t _F			0.2		us	
LCD Driving Voltage	VLCD	3.0		10.0	VDD-V5 (1/5 Bias)	V	

13-2-1 AC Characteristics


$(V_{DD} = 4.5V \sim 5.5V)$	$Ta = -20 \sim +70^{\circ}C$
$(v_{DD} - 4.5) = 3.5 v_{c}$	$1a = -20^{12} + 70^{10} C$

Mode	Item	Symbol	Min	Тур	Max	Unit
	E Cycle Time	t _C 500				
	E Rise/Fall Time	t _R ,t _F			25	
(1) Write Mode	E Pulse Width (High, Low)	t _w	220			
(refer to Figure 8.0)	R/W and RS Setup Time	t _{su1}	40			ns
	R/W and RS Hold Time	t _{H1}	10			
	Data Setup Time	t _{su2}	60			
	Data Hold Time	t _{H2}	10			
	E Cycle Time	t _C	500			
	E Rise/Fall Time	t _R ,t _F			25	
(2) Read Mode	E Pulse Width (High, Low)	t _w	220			
(refer to Figure 9.0)	R/W and RS Setup Time	t _{su}	40			ns
	R/W and RS Hold Time	t _H	10			
	Data Out Delay Time	t _D			120	
	Data Hold Time	t _{DH}	20			1


 $(V_{DD} = 2.7V \sim 4.5V, Ta = -20 \sim +70^{\circ}C)$

Mode	Item	Symbol	Min	Тур	Max	Unit
	E Cycle Time	t _C	1400			
	E Rise/Fall Time	t _R ,t _F			25	
(3) Write Mode	E Pulse Width (High, Low)	t _w	400			
(refer to Figure 8.0)	R/W and RS Setup Time	t _{su1}	60			ns
	R/W and RS Hold Time	t _{H1}	20			
	Data Setup Time	t _{su2}	140			
	Data Hold Time	t _{H2}	10			
	E Cycle Time	t _C	1400			
	E Rise/Fall Time	t _R ,t _F			25	
(4) Read Mode	E Pulse Width (High, Low)	t _w	450			
(refer to Figure 9.0)	R/W and RS Setup Time	t _{su}	60			ns
	R/W and RS Hold Time	t _H	20			
	Data Out Delay Time	t _D			360	
	Data Hold Time	t _{DH}	5			

13-2-2 Write mode

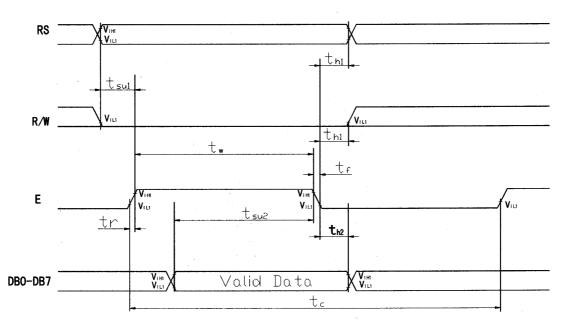

13-2-3 Read mode

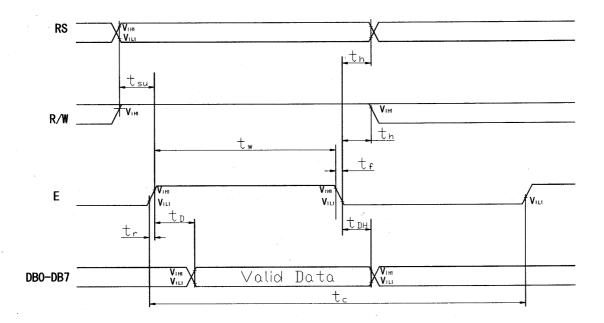


Character Code (DDRAM data)								CGRAM Address						CGRAM Data								Pattern
D7	D6	D5	D4	D3	D2	D1	D 0	A5	A4	A3	A2	A1	A0	P7	P6	P5	P4	P3	P2	P1	P0	20 number
0	0	0	0	Х	0	0	0	0	0	0	0	0	0	Х	Х	Х	0				0	Pattern 1
											0	0	1					0	0	0		
											0	1	0					0	0	0		
											0	1	1									
											1	0	0					0	0	0		
											1	0	1					0	0	0		
											1	1	0					0	0	0		
											1	1	0					0	0	0		
											1	1	1				0	0	0	0	0	
0	0	0	0	Х	1	1	1	1	1	1	0	0	0	Х	Х	Х		0	0	0		Pattern 8
											0	0	1					0	0	0		
											0	1	0					0	0	0		
											0	1	1									
											1	0	0					0	0	0		
											1	0	1					0	0	0		
											1	1	0					0	0	0		
											1	1	1				0	0	0	0	0	

Table 3. Relationship Between character Code (DDRAM) and Character Pattern (CGRAM)

"x": don't care

14. FRAME FREQUENCY (1/16 duty cycle)

A-type Waveform

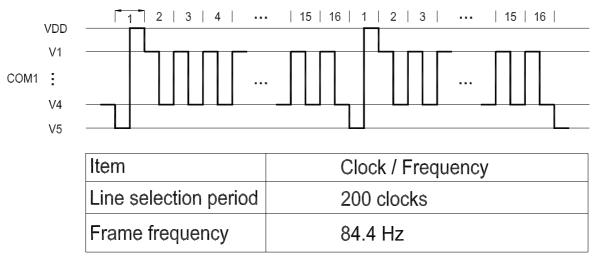

* fosc = 270 kHz (1 clock = 3.7 us)

15. LCD Modules Handling Precautions

- The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.
- If the display panel is damaged and the liquid crystal substance inside it leaks out, do not get any in your mouth. If the substance come into contact with your skin or clothes promptly wash it off using soap and water.
- Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.
- The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarize carefully.
- To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.

-Be sure to ground the body when handling the LCD module.

-Tools required for assembly, such as soldering irons, must be properly grounded.

-To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.

-The LCD module is coated with a film to protect the display surface. Exercise care when peeling off this protective film since static electricity may be generated.

■ Storage precautions

When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps. Keep the modules in bags designed to prevent static electricity charging under low temperature / normal humidity conditions (avoid high temperature / high humidity and low temperatures below 0°C). Whenever possible, the LCD modules should be stored in the same conditions in which they were shipped from our company.

16. Others

- Liquid crystals solidify at low temperature (below the storage temperature range) leading to defective orientation of liquid crystal or the generation of air bubbles (black or white). Air bubbles may also be generated if the module is subjected to a strong shock at a low temperature.
- If the LCD modules have been operating for a long time showing the same display patterns may remain on the screen as ghost images and a slight contrast irregularity may also appear. Abnormal operating status can be resumed to be normal condition by suspending use for some time. It should be noted that this phenomena does not adversely affect performance reliability.
- To minimize the performance degradation of the LCD modules resulting from caused by static electricity, etc. exercise care to avoid holding the following sections when handling the modules :
 - Exposed area of the printed circuit board
 - Terminal electrode sections