


NO	DESCRIPTION	DATE
①	BACKGROUND FORMAT UPDATED	04.27.10'

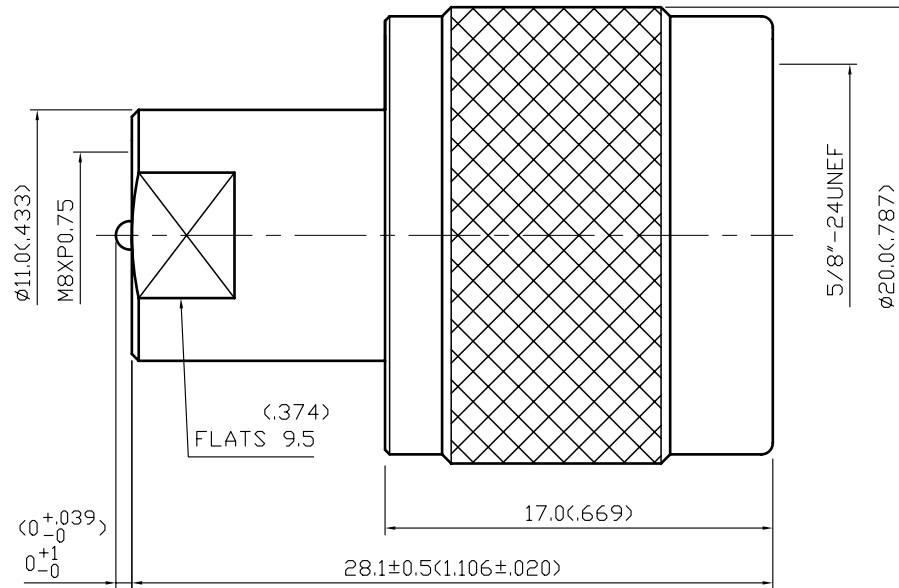

### 1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-900 MHz  
1.2 NOMINAL IMPEDANCE: 50 OHM

### 2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604  
2.2 CENTER CONTACT: BRASS PER JIS-C3604  
2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

### 3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

### 4.0 ENVIRONMENTAL

- 4.1 OPERATING TEMPERATURE RANGE: -55° C TO +125° C

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
8	SHELL	BRASS	1	NICKEL 100 $\mu$ " MIN.
7	CHASSIS	BRASS	1	NICKEL 100 $\mu$ " MIN.
6	CENTER CONTACT	BRASS	1	GOLD
5	GASKET	SILICONE	1	RED
4	WASHER	BRASS	1	NONE
3	INSULATION	TEFLON	1	NONE
2	INSULATION	TEFLON	1	NONE
1	BODY	BRASS	1	NICKEL 100 $\mu$ " MIN.

APPROVED by \_\_\_\_\_ DATE: \_\_\_\_\_

DESCRIPTION		FME PLUG - N PLUG		DATE		REV.	
製圖	DRAWN Yoko	TOLERANCE	品名	23-09	T.G.N	日期	04.27.93
檢圖	CHECK Jacky	.XX ±0.2	TITLE	\ROHS COMPLIANT (50Ω)		版次	A-1
認圖	APPROVAL Lewis	.XX ±0.1	單位	DWG.NO.	23-0041		
		.XXX ±0.05	比例	SCALE			
		ANGLE ±5°	4:1	佳楠精密電子股份有限公司 CHIN NAN PRECISION ELECTRONICS CO.,LTD.			