

**MATERIALS:**

SHIELDED: STAINLESS STEEL.

PLASTIC HOUSING: ENGINEERING THERMOPLASTIC

FLAMMABILITY RATING UL 94V-0.

CONTACTS: 0.35MM THICKNESS PHOSPHOR BRONZE

PLATING: GOLD PLATING OVER NICKEL IN CONTACT.


※凡標註 △記號者, 為品管檢驗之尺寸

6u" P/N 3101815601

15u" P/N 3101815701

30u" P/N 3101815801

50u" P/N 3101815901

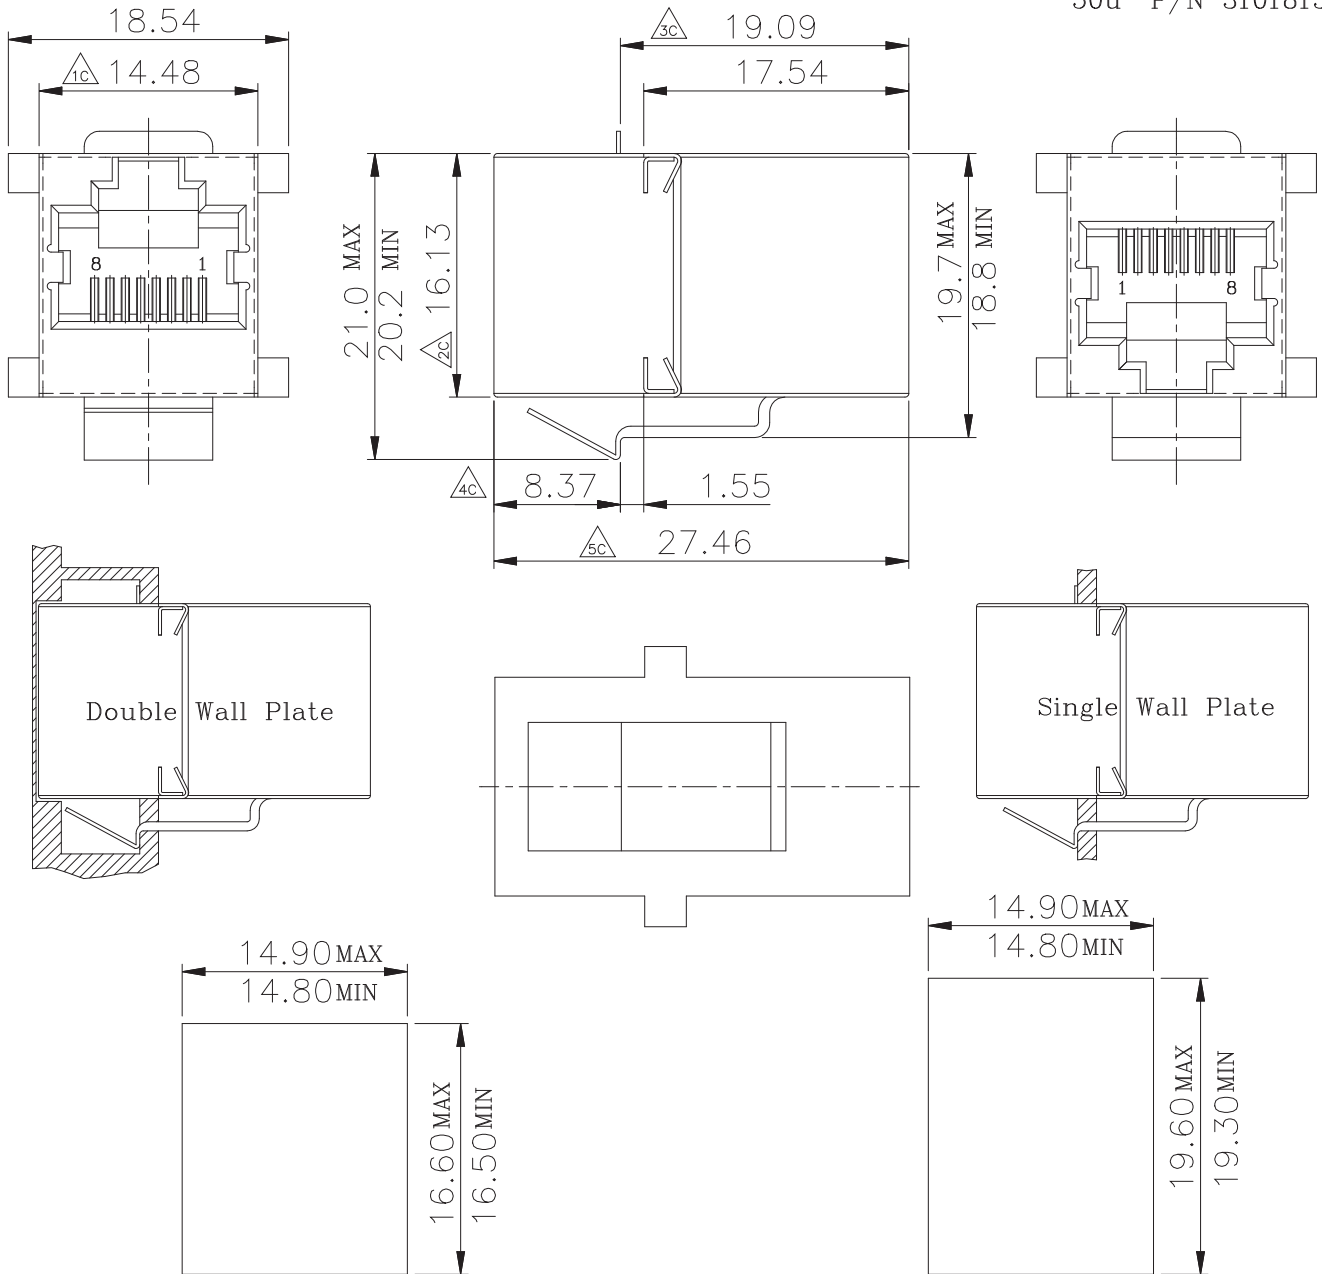

Front Panel Jack Only Clearance  
W/O Latch Feature

Single Panel-Latch Clearance  
Panel Thickness 0.062 inch

設計 DR. Andy 93.04.30	核准 APPD. Jerry 93.04.30	容許公差 .XXX ±0.10 .XX ±0.25 .X ±0.38 X ±0.50 ANG ±3°	TOLERANCE	品名 ARTICLE MODULAR COUPLER JACK(8P8C SHIELDED)
版本說明 REVISION NOTE		圖號 DWG NO. <b>RS-1863111</b>		單位 UNIT mm
		比例 SCALE 2/1		張數 SHEET 1/1
		版本 REV. A		

