

NEOZED FUSE LINK 400V GL, SIZE D02,  
35A IN FOLDING BOX



Similar to image

**Technical data:**

<b>Color coding of the fuse link</b>		black
<b>Current / for AC / rated value</b>	A	35
<b>Size of the fallback-system / acc. to DIN EN 60269-1</b>		D02
<b>Supply voltage</b> • for AC / rated value	V	400
<b>Switching capacity current / in accordance with IEC 60947-2 / rated value</b>	kA	50
<b>Ambient temperature</b> • minimum	°C	-5
• maximum	°C	40

**Certificates/approvals:**

<b>General Product Approval</b>	<b>Declaration of Conformity</b>	<b>Test Certificates</b>
<a href="#">ROSTEST</a>  VDE	<a href="#">Manufacturer</a>  ÖVE	<a href="#">Manufacturer</a>

**Further information:**

---

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

---

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/maill>

---

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SE2335/all>

---

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SE2335](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SE2335)

---


CAX-Online-Generator

<http://www.siemens.com/cax>

---

Tender specifications

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

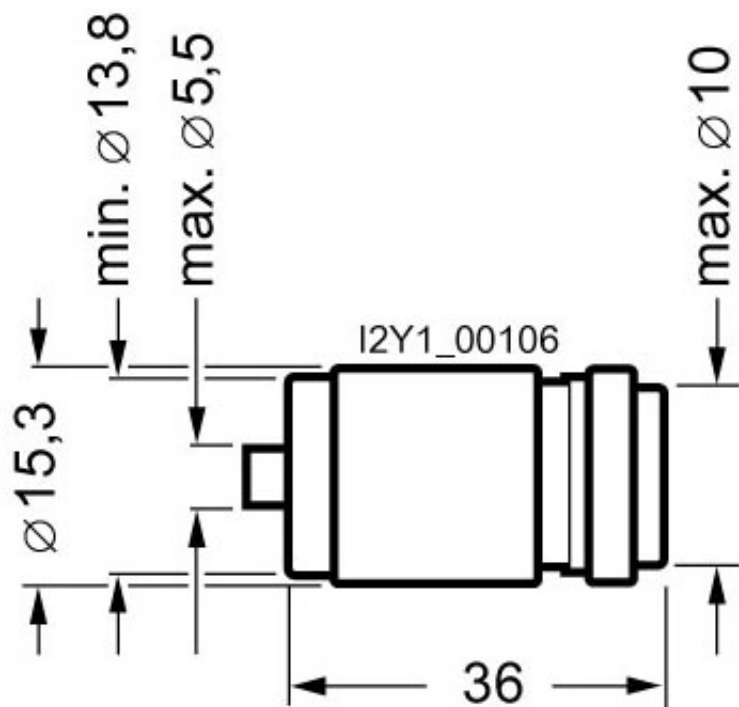

last change:

Oct 31, 2011