

NEOZED-FUSE LINK 400V GL/GG,GR.D02,  
40A, COLLAPSIBLE BOX



Similar to image

#### Technical data:

<b>Color coding of the fuse link</b>		black
<b>Current / for AC / rated value</b>	A	40
<b>Size of the fallback-system / acc. to DIN EN 60269-1</b>		D02
<b>Supply voltage</b> • for AC / rated value	V	400
<b>Switching capacity current / in accordance with IEC 60947-2 / rated value</b>	kA	50
<b>Ambient temperature</b> • minimum	°C	-5
• maximum	°C	40

#### Certificates/approvals:

General Product Approval

[ROSTEST](#)



Test Certificates

[Manufacturer](#)

#### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SE2340/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SE2340](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SE2340)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

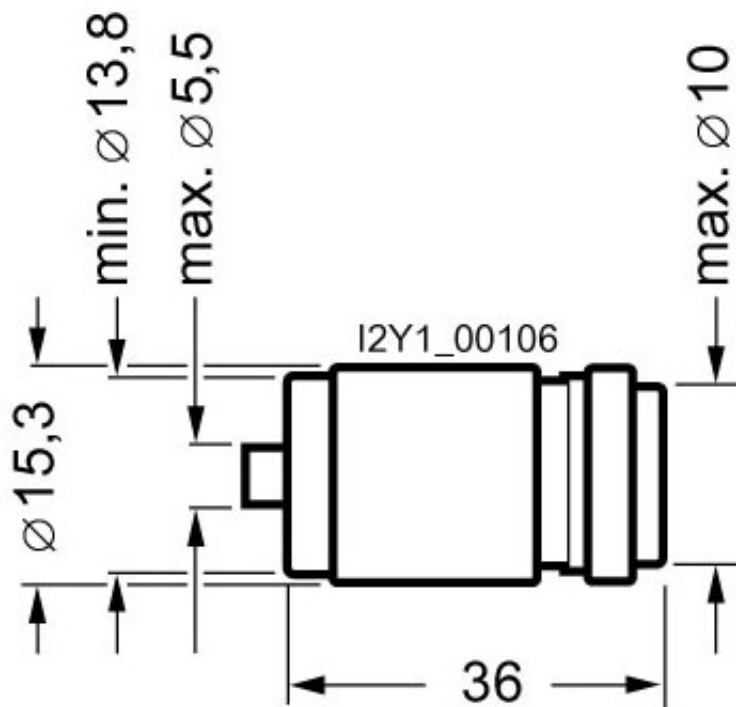

last change:

Oct 31, 2011