


LENGTH (MM)
1500 ±20
2500 ±30
5000 ±50
10000 ±100
15000 ±150
20000 ±200

**FEATURES**

- 1. Gold-plated plugs
- 2. Zn alloy pearlized Chromium-plated housings
- 3. No ferrite
- 4. With PET sleeve

**ELECTRICAL SPECIFICATION:**

- 1. Withstanding voltage: 500VDC 0.1SEC
- 2. Insulation Resistance: 50Mohm
- 3. The Maximum Length of Cable is 15M

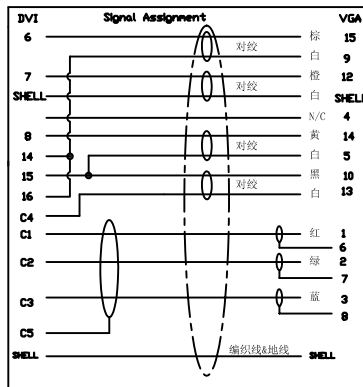

Cable Termination

12	VGA 15PIN PVC MOLDED	1PCS	
11	VGA 15PIN METAL SHELL I/II	1PCS	
10	VGA 15PIN PLUG (PINS GOLD-PLATED, SHELL GOLD-PLATED)	1PCS	
9	FERRITE BEADS JACKET	2PCS	
8	FERRITE BEADS JDK16X28.5X8.3	2PCS	
7	CLENT'S LOGO label	2PCS	
6	Cable	1PCS	
5	DVI(P)SCREW THUMB HANDLE Zn Alloy, Ni-plated	4PCS	
4	SCREWS 4-40UNC steel Ni-plated	4PCS	
3	DVI(P)PVC TAIL PVC black	1PCS	
2	DVI(P)Metal Housing Zn Alloy, pearl Chromium-plated	1SET	
1	24+1 PLUG (PINS Gold-plated, METAL SHELL Gold-plated)	2PCS	
Item	Descriptions	Quantity	Remark