


CUSTOMER	NEDIS
PRODUCT NO.	CABLE-177/10

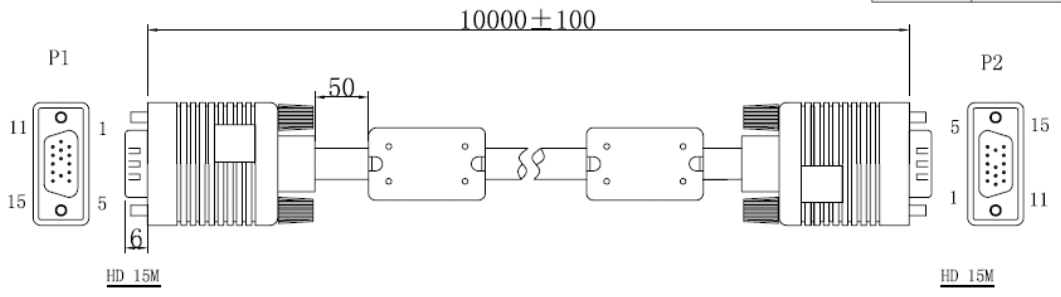


NOTE:
 1, ELECTRONIC TEST
 1.1 Contact Resistance: 2ohm
 1.2 Insulation Resistance: 1Mohm/Min
 1.3 Hi-Pot: Dc 300v/10ms
 2, ALL MATERIALS MUST BE IN LINE WITH RoHS

MATERIAL LIST:

NO.	PARTS NAME	SPECIFICATION STANDARD	UNIT	QT'Y
①	WIRING	30#*3COAX*28#*7C*AL*B, 3*7 OD:8.0MM, L:10M	PIECE	1
②	PLUG	HD15 M, BLACK, NICKEL PLATED	PIECE	2
③	OUTER MOLD	45P BLACK PVC	GRAM	
④	SCREW	4*47MM, BLACK	PIECE	4
⑤	PACKING	NEDIS BV CARTON	CM	46*30*30CM

PIN ASSIGNMENT



GENERAL TOLERANCES (UNLESS SPECIFIED)

LENGTH: X. ±1
 .X ±0.2
 .XX ±0.10
 ANGLE: X° ±1°
 .X° ±0° 30'

UNIT: mm	REV:		NAME	HD15 M/HD15 M
DESIGN		S. P. NO.		
CHECK		P. O. NO.	DWG. NO.	
APPROVE		SIZE	PAGE	1/1