

LogiLink®



4K 4x1 HDMI™ Switch 4K/60 Hz

Art. No.: HD0056

Designed for applications that require the routing of 4 sources to 1 compatible display device. It enables the reliable transmission at video resolutions up to 4K@60 Hz. Features auto and manual switching modes for selection; instantly switching for a smooth video transition between HDMI ports.

Features:


- » Allows up to four HDMI sources to be connected to one HDMI display
- » Supports manual switching, remote switching or automatic switching (Smart function)
- » Resolution up to UHD 4K@60 Hz (YUV 4:4:4) and Full 3D
- » Bandwidth: 6 Gbps/600 MHz per Channel (18 Gbps total)
- » Supports HDCP 2.2, DDC, HDR and CEC functions
- » Supports 12bit per channel (36bit all channels) deep color
- » Supports uncompressed audio such as LPCM
- » Supports compressed audio such as DTS, Dolby Digital (including DTS-HD Master Audio™ and Dolby TrueHD)



(a) (b) (c) (d) (e) (f)




(g) (h) (i)

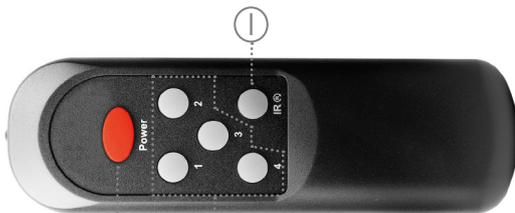

(j) (k) (l)

- (a) Power LED indicator
- (b) HDMI input 1-4 ports LED indicator
- (c) Auto mode LED indicator
- (d) IR mode LED indicator
- (e) IR signal receiver
- (f) Selection Switch
- (g) DC 5V input through Micro USB cable
- (h) HDMI output port
- (i) HDMI input 1-4 ports
- (j) Remote power on/off button
- (k) Select HDMI input 1-4
- (l) IR mode on/off button

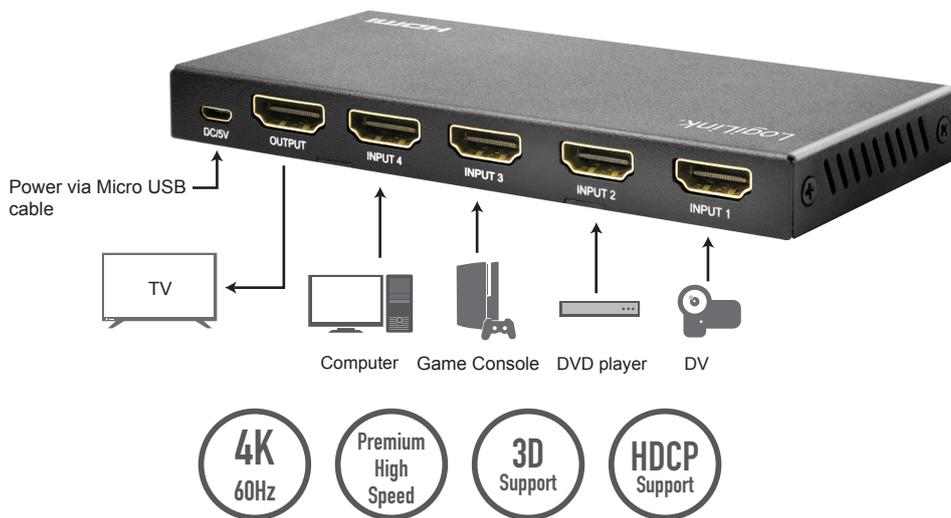

Specifications:

Input Ports	4x HDMI-A female, 1x Micro USB female
Output Port	1x HDMI-A female
HDMI Version	2.0
HDCP Version	2.2
HDMI CEC	Yes
HDMI HDR	Yes
Output Resolution	480i/60 Hz, 576i/50 Hz, 1080i/50/60 Hz, 480p/60 Hz, 576p/50 Hz, 720p/50/60 Hz, 1080p/24/25/30/50/60 Hz, 4K@24/25/30 Hz, 4K@50/60 Hz
Video Bandwith	6 Gbps/600 MHz
3D Supporting	Yes
Input and output DDC signal	Yes
Chassis Material	Metal
LED Indication	Yes
IR Remote Support	Yes (require 2x 1,5 V AAA batteries, not included in the package)
Power By	Through Micro USB cable, 5 V/1 A (5 W max.)
Uncompressed Audio	LPCM 7.1
Compressed Audio	DTS, Dolby Digital, DTS-HD Master Audio™, Dolby TrueHD
Operating Temperature	0–70°C
Operating Humidity	10–85% RH (no condensation)
Storage Temperature	-10–80°C
Storage Humidity	5–90% RH (no condensation)
Dimensions	13,6 x 6,1 x 1,45 cm
Weight	0,173 kg
Color	Black

Package Contents:

- » 1x HDMI Switch
- » 1x Remote Control
- » 1x USB Charging Cable
- » 1x User Manual

Package Information:

- » Packing Dimension: 193x145x60 mm
- » Packing Weight: 0,34 kg
- » Carton Dimension: 505x235x340 mm
- » Carton Q'ty: 15 pcs
- » Carton Weight: 5,6 kg



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.



HD0056



4 052792 066951

Made in China