



# LogiLink®

**4K Wireless BYOD  
Presentation System, 16 to 1**  
4K/60 Hz, 50 m

Art. No.: HDW0111  
HDW0111AT



## Seamless Connectivity, Unmatched Clarity!

Wirelessly transmits HDMI video and audio signals in UHD 4K/60 Hz over a distance of up to 50 m with an unobstructed view. Supports 16 sources to 1 output screen.

**4K  
UHD**



Freedom from  
Cables




Ultra High  
Definition



Multi-Room  
Use



Low  
Latency



Wide  
Compatibility




Plug &  
Play



USB  
Powered

## Point-to-Multi-Point Connections: 16 TX to 1 RX

Quick and easy sharing from notebook or from a tablet/smartphone using AirPlay or Miracast to a HDMI TV/monitor.

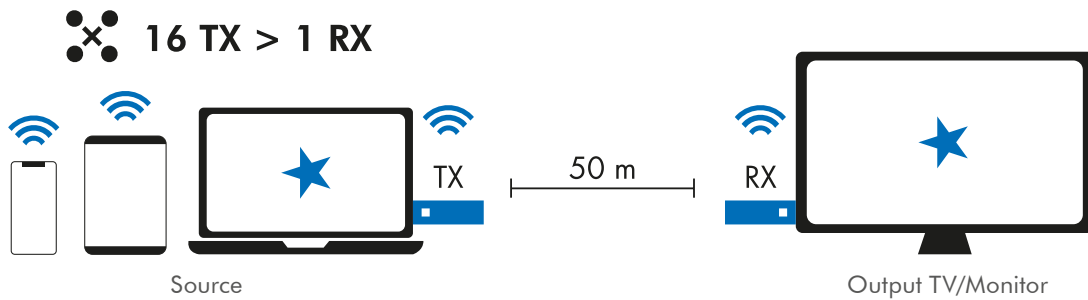

### Enhanced Viewing Experience

Ultra-high-definition (4K) picture quality ensures crystal clear images and vibrant colors.

### Freedom from Cables

Eliminates the need for HDMI cables, reducing clutter and providing a clean setup.

### Low Latency

Ensures smooth, lag-free video and audio transmission, which is crucial for gaming and real-time presentations.

### Ease of Setup

Plug-and-play functionality makes it easy to install and use without extensive configuration.

### Multi-Room Use

Allows streaming from one source to multiple displays in different rooms, enhancing flexibility in device placement.

### Portability

Compact design makes it easy to move and set up in different locations, suitable for both home and professional use.

### Compatibility

Works with a wide range of devices, including TVs, projectors, laptops, and gaming consoles.

### Wide Usage

Perfect for streaming movies, playing video games, watching sports; business meeting or educational presentations; events and presentations.



HDMI-A male



Reset button and LED indicator



Power supply through DC 5V USB-C port

## Specifications:

Connection	TX/RX: 1x HDMI-A male, 1x USB-C female
HDMI Version	2.0/1.4
HDCP Version	2.2/1.4
Output Resolution	Up to 4K/60 Hz
Transmission Distance	Up to 50 m (unrestricted view)
Protocol	WPA2
Security	AES 128-bit encryption
Latency	100 ms (at 60 fps)
Wireless Standard	802.11ac
Frequency Range	TX: 5180–5240 MHz/5745–5825 MHz RX: 5180–5240 MHz/5745–5825 MHz
Max. Transmission Power	TX: 17.37 mW/18.23 mW RX: 22.02 mW/19.72 mW
Audio Format	PCM (2 channels)
Auto Pairing & Connection	Yes
LED Indication	Yes
Operating Temperature	0–40°C
Operating Humidity	10–80% RH (non-condensing)
Color	Black
Dimensions	TX/RX: 9.1 x 3.4 x 1.28 cm
Weight	TX: 28 g, RX: 25.5 g
Compatibility	Windows, macOS, iOS, iPadOS, Android
Power Supply	Powered through USB-C port (5 V/1 A, 5 W max.)

Art-No.	Package Contents	EAN Code
HDW0111	1x Transmitter, 1x Receiver, 2x HDMI Extension Cable, 2x USB-C to USB-A Cable, 1x User Manual	4052792075380
HDW0111AT (Additional TX Unit)	1x Transmitter, 1x HDMI Extension Cable, 1x USB-C to USB-A Cable, 1x User Manual	4052792075397

## Package Information:

Art-No.	Packing Dimension	Packing Weight	Carton Dimension	Carton Q'ty	Carton Weight
HDW0111	119 x 119 x 48 mm	0.263 kg	530 x 270 x 270 mm	30 pcs	8.61 kg
HDW0111AT	76 x 119 x 48 mm	0.169 kg	370 x 230 x 310 mm	30 pcs	5.55 kg



\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.

Made in China