



Cat.6A Patch Panel 12-Port, STP, 10"

Technical Features

Cat.6A 12-Port Patch Panel, Shielded

Category 6A Class EA 10G 500 MHz

ISO/IEC 11801 and TIA/EIA 568C.2


12 shielded RJ45 jacks

Metal Housing, 10" Rack Mounting, 1U

For AWG22 to AWG24 solid wire IDC termination

Part no.	Color	EAN Code
NP0052	RAL7035 Light Grey	4052792027945
NP0052B	RAL9005 Black	4052792040241

Technical Drawings

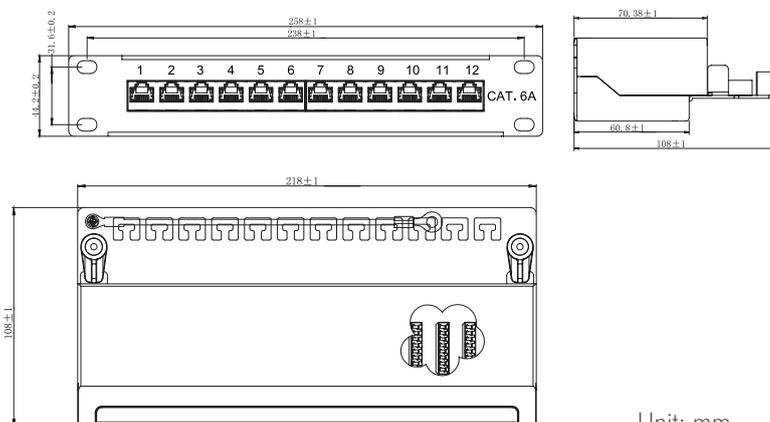

Unit: mm

Electrical:

1. Voltage Rating: 125 V AC RMS
2. Current Rating: 1,5 A mp
3. Contact Resistance: 100 milli ohms max
4. Insulation Resistance: 1000 m ohms min @500V DC
5. Dielectric Strength: 750 V AC RMS 60Hz, 1 min
6. Cat.6A Permanent Link: Conform to ANSI/TIA/EIT-568 C.2 ISO/IEC 11801:2010 Class EA

Environmental:

1. Storage: -40°C–70°C
2. Operation: -10°C–60°C

Made in China

www.2direct.de



RoHS
compliant

*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

Package Contents

1x Cat.6A Patch Panel 12-Port, STP, 10"

Packaging Informations

Packing Dimension	275x135x55 mm
Packing Weight	0,875 g
Carton Dimension	570x290x290 mm
Carton Q'ty	20 pcs
Carton Weight	18,5 kg

