




- Home
- About KSS
- Contact Us
- What's New
- Our Products
- Search


### 1101 KSS PCB Support




- Material: UL approved Nylon 66, 94V-2.
- Color: Natural.
- Feature: Easy to install / unload by hand, without tool. Pre-drill the hole on P.C Board and chassis before usage. Double locking design ensure that once support inside the panel cannot be removed accidentally Simply to push - through.

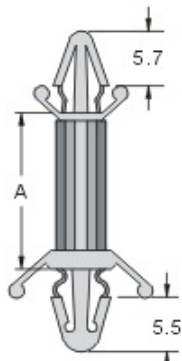

Standard Design



CS-0305, 0406



CS-0305S

Unit: mm

Item No.	A	PCB		Chassis		Packing
		hole	thickness	hole	thickness	
CS-0305	4.8 ( 3/16")	4.0	1.8	4.8	2.5	100 pcs / Bag
CS-0305S	4.8 ( 3/16")	3.0	2.0	3.0	2.0	
CS-0406	6.4 ( 1/4")	4.0	1.8	4.8	2.5	
CS-0406S	6.4 ( 1/4")	4.0	2.3	4.8	2.0	
CS-0610	9.3 ( 3/8")	4.0	1.8	4.8	2.5	
CS-0813	12.7 ( 1/2")	4.0	1.8	4.8	2.5	
CS-1016	15.9 ( 5/8")	4.0	1.8	4.8	2.5	

<input type="checkbox"/> CS-1219	19.1 ( 3/4")	4.0	1.8	4.8	2.5
<input type="checkbox"/> CS-1422	22.2 ( 7/8")	4.0	1.8	4.8	2.5
<input type="checkbox"/> CS-1625	25.4 (1")	4.0	1.8	4.8	2.5
<input type="checkbox"/> CS-1828	28.5 (1 1/8")	4.0	1.8	4.8	2.5
<input type="checkbox"/> CS-2236	35.0 (1 3/8")	4.0	1.8	4.8	2.5
<input type="checkbox"/> CS-2236L	35.0 (1 3/8")	4.8	1.8	4.8	2.5

Input Sample Order

[Check Selected](#)

[Return All Selected](#)

Home

About KSS

Contact Us

What's New

Our Products

Search

KAI SUH SUH ENTERPRISE CO., LTD.