

# BASIC T5 Short Emergency Lighting

Versatile solutions for emergency lighting applications



Basic T5 EL



QT-ECO


## Benefits

- Suitable for emergency power operation
- Very good luminous flux maintenance throughout the life of the lamp

## Product Features

- Emergency Lighting lamps optimized for emergency power operation
- Compact and slim
- Available light color: Cool White (640)

## Dimensions

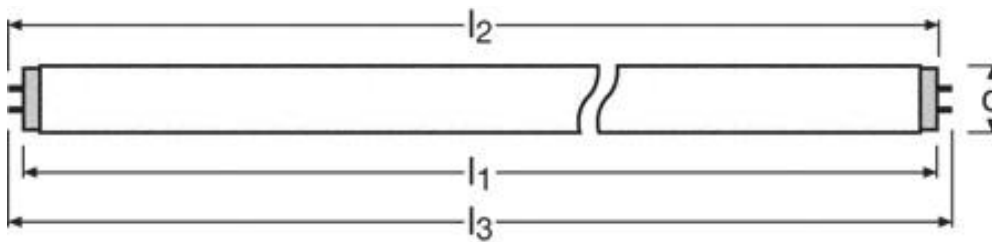

Description	Base	Length (l1) max [mm]	Length (l2) min [mm]	Length (l2) max [mm]	Length (l3) max [mm]	Tube Diameter (d) max [mm]
T5 6 W BASIC EL	G5	212.1	216.8	219.2	226.3	16
T5 8 W BASIC EL	G5	288.3	293.0	295.4	302.5	16

## Electrical Data

T5 Basic EL CCG	Lamp Voltage rated [V] <sup>1</sup>	Lamp Current rated [mA] <sup>1</sup>	Pre-heat current rated [mA]
6 W	42	160	205
8 W	56	145	205

T5 Basic EL ECG	Lamp Voltage in HF <sup>2</sup> mode rated [V] <sup>1</sup>	Lamp Current in HF mode rated [mA] <sup>1</sup>	Pre-heat current rated [mA]
6 W	36	150	150
8 W	50	150	150

<sup>1</sup> According to IEC 60081 (measurement with reference control gear)

<sup>2</sup> High Frequency


Edition 08.2013. Subject to change without notice. Errors and omissions excepted. Always make sure to use the most recent release.

LP LPD EM

## Photometrical Data<sup>3</sup>

T5 Basic EL	Light Color LUMILUX®	Color Rendering Index (CRI), Ra	Target Color Coordinate X	Target Color Coordinate Y	Color Temperature [K]	Nominal Luminous Flux [lm]	Max. Luminous Flux [lm]
6 W	640	60...69	0.380	0.380	4000	270	-
8 W	640	60...69	0.380	0.380	4000	385	-

## Relative Luminous Flux / Ambient Temperature

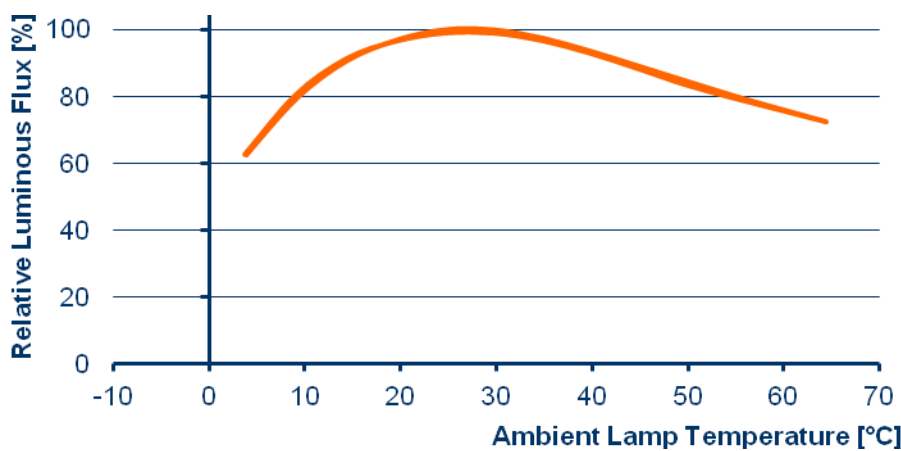

For more detailed information please refer to our technical guide for Fluorescent Lamps. Free download at [www.osram.com](http://www.osram.com)

<sup>3</sup> Measurement in accordance with EN 60081, annex C and the relevant annex on rated colour characteristics in IEC 60081.

## Lifetime<sup>4</sup>

	ECG <sup>5</sup> (IEC 60929) preheat IEC 60081 switching cycle <sup>6</sup>	CCG (IEC 60921) IEC 60081 switching cycle <sup>6</sup> (only for 18W – 36W)
<b>B50<sup>7</sup></b>	10,000 h	4,000 h
<b>Service life time<sup>8</sup></b>	7,000 h	2,000 h
<b>LLMF<sup>9</sup> 20.000 h</b>	-	-
<b>LLMF 16.000 h</b>	-	-
<b>LLMF 12.000 h</b>	-	-
<b>LLMF 8.000 h</b>	-	-
<b>LLMF 6.000 h</b>	-	-
<b>LLMF 4.000 h</b>	-	-
<b>LLMF 2.000 h</b>	-	-
<b>LSF<sup>10</sup> 20.000 h</b>	-	-
<b>LSF 16.000 h</b>	-	-
<b>LSF 12.000 h</b>	-	-
<b>LSF 8.000 h</b>	-	-
<b>LSF 6.000 h</b>	-	-
<b>LSF 4.000 h</b>	-	-
<b>LSF 2.000 h</b>	-	-

<sup>4</sup> Measurement in accordance with EN 60081, annex C.

<sup>5</sup> Electronic Control Gear

<sup>6</sup> Switching cycle 165 min. on, 15 min. off (according to IEC 60081)

<sup>7</sup> Average rated lamp life (B50) is the average value of the life time for an entity of lamps operated under standardized conditions until 50% failure. In other words, this is the operation time at which, for a standardized 3-hour switching cycle (165 minutes on / 15 minutes off (according to IEC)), 50% of a sample population of lamps have failed.

<sup>8</sup> Service life time is the mathematical life time (maintenance multiplied with the % of failed lamps e.g. B10) for lamps in an installation after which the installation luminous flux (100 h value) decreased with 20 % (decrease in luminous flux and failed lamps) for indoor lighting.

<sup>9</sup> Lamp Lumen Maintenance Factor (lamp luminous flux in %): Ratio of the luminous flux of a specific quantity of lamps at a defined number of hours of operation to their luminous flux at 100 h

<sup>10</sup> Lamp Survival Factor (lamp survival in %): Ratio of the number of electrically intact lamps to the total number of lamps

Edition 08.2013. Subject to change without notice. Errors and omissions excepted. Always make sure to use the most recent release.

LP LPD EM

## Energy labelling<sup>11</sup>

Description	Energy efficiency class	Weighted energy consumption E <sub>c</sub> [kWh/1000h]
T5 Basic EL 6W/640	A	7
T5 Basic EL 8W/640	A	8

## Logistic Data

Description	EAN 10	EAN 40	Packaging Unit
T5 Basic EL 6W/640	4008321152381	4008321152398	25
T5 Basic EL 8W/640	4050300606644	4050300606651	25

<sup>11</sup> According to Regulation (EU) No 874/2012 of July 12, 2012

Edition 08.2013. Subject to change without notice. Errors and omissions excepted. Always make sure to use the most recent release.

LP LPD EM

## Lamp/ECG System combination

Lamp	ECG	EAN 10 ECG	Luminous Flux [lm] @25°C	System Power [W]	IN [A]	Power Factor ECG	System Luminous Efficacy [lm/W]	Length [mm]	Width [mm]	Height [mm]	Distance between holes [mm]	T <sub>a</sub> [°C]
<b>T5 Basic EL 6W</b>	QT-ECO 1x4-16/220-240 L	4050300660370	270	8.5	0.06	0.60c	32	150	22	22	140	-15...+50
	QT-ECO 1x4-16/220-240 S	4050300638584	270	8.5	0.06	0.60c	32	80	40	22	72-75	-15...+50
	QT-ECO 2x5-11/220-240 S	4050300821504	560	14.5	0.11	0.60c	39	80	40	22	72-75	-15...+50
<b>T5 Basic EL 8W</b>	QT-ECO 1x4-16/220-240 L	4050300660370	450	10.5	0.07	0.60c	43	150	22	22	140	-15...+50
	QT-ECO 1x4-16/220-240 S	4050300638584	450	10.5	0.07	0.60c	43	80	40	22	72-75	-15...+50
	QT-ECO 2x5-11/220-240 S	4050300821504	900	17.5	0.13	0.60c	51	80	40	22	72-75	-15...+50

For more information on ECG refer to <http://www.osram.com/ecg>

For more information on System Guarantee refer to <http://www.osram.com/guarantee>

In case of lamp breakage: [www.osram.com/brokenlamp](http://www.osram.com/brokenlamp)

For more information technical Information see Technical guide. Free download at [www.osram.com](http://www.osram.com)