


# Bootlace ferrule/ Bootlace Ferrules, Insulated

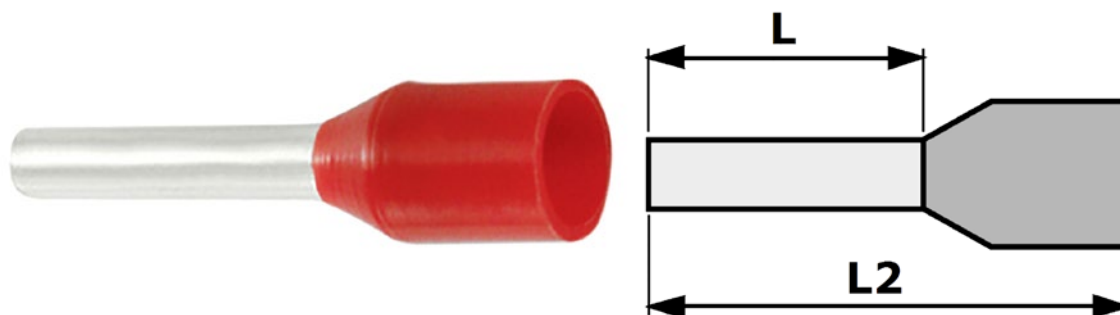

## SPECIFICATION:

Material	Copper
Insulation material	Polyamide
Surface material	Tin-plated
Voltage	600 V

## PRODUCT RANGE:

Art. Nr.	Cross-section	Length	Length L2	Colour	Temperature range
RND 465-00134	0.25 mm <sup>2</sup>	8 mm	12.4 mm	blue	max. +105 °C
RND 465-00135	0.34 mm <sup>2</sup>	8 mm	12.4 mm	turquoise	max. +105 °C
RND 465-00136	0.5 mm <sup>2</sup>	8 mm	14.0 mm	orange	max. +105 °C
RND 465-00137	0.75 mm <sup>2</sup>	8 mm	14.3 mm	white	max. +105 °C
RND 465-00138	1.0 mm <sup>2</sup>	8 mm	14.3 mm	yellow	max. +105 °C
RND 465-00139	6.0 mm <sup>2</sup>	18 mm	26.5 mm	black	max. +105 °C
RND 465-00140	1.5 mm <sup>2</sup>	10 mm	16.3 mm	red	max. +105 °C
RND 465-00141	2.5 mm <sup>2</sup>	12 mm	19.4 mm	blue	max. +105 °C
RND 465-00142	4 mm <sup>2</sup>	12 mm	19.4 mm	grey	max. +105 °C
RND 465-00143	10 mm <sup>2</sup>	18 mm	26.8 mm	ivory	max. +105 °C
RND 465-00144	16 mm <sup>2</sup>	18 mm	28.0 mm	green	max. +105 °C
RND 465-00185	2.5 mm <sup>2</sup>	12 mm	19.4 mm	grey	max. +105 °C
RND 465-00187	0.5 mm <sup>2</sup>	8 mm	14.0 mm	white	max. +105 °C
RND 465-00188	0.75 mm <sup>2</sup>	8 mm	14.3 mm	grey	max. +105 °C
RND 465-00189	1.0 mm <sup>2</sup>	8 mm	14.3 mm	red	max. +105 °C
RND 465-00190	1.5 mm <sup>2</sup>	10 mm	16.3 mm	black	max. +105 °C
RND 465-00193	0.25 mm <sup>2</sup>	8 mm	12.4 mm	violet	max. +105 °C
RND 465-00194	0.34 mm <sup>2</sup>	8 mm	12.4 mm	pink	max. +105 °C
RND 465-00195	0.75 mm <sup>2</sup>	8 mm	14.3 mm	blue	max. +105 °C