

# D-Sub Gender Changer

9P, Female / Female






## SPECIFICATION:


Poles	9
Insulator	PBT, UL 94 V-0
Gender of contacts	Female / Female
Connection A	D-SUB 9-Pin Female
Connection B	D-SUB 9-Pin Female
Housing material	Steel
Temperature range	-55...+105 °C
Rated current	3 A
Contact material	Brass, gold-plated
Dielectric withstand voltage	AC 1000 V RMS
Insulation resistance	1000 M $\Omega$ min. at DC 500 V
Contact resistance	25 m $\Omega$ max.

**Art. Nr.**

**RND 205-00849**

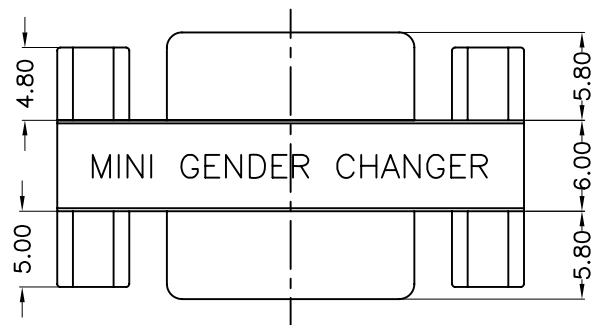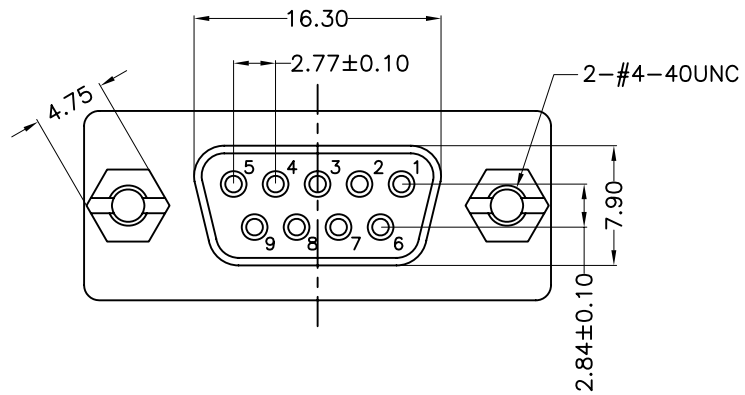

DGC 09F/F GENDER CHANGER  
 PIN OUT: 9Female 9Female



Label: Yellow Color With Black Character.  
 One Side: MINI GENDER CHANGER.  
 The Other Side: U.S.A PATENT 5199906

