





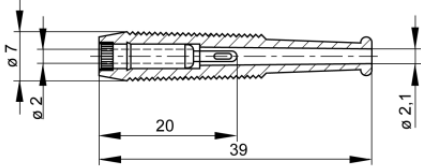


Sockets

MKU 1



Product	MKU 1
description	2 mm diameter miniature coupling, insulated, tin-plated copper beryllium contact spring with solder connection. Flexible, shatter-proof insulated sleeve. For making up connecting leads with a maximum external diameter of 2 mm.
operating instruction	BA206
article-no. / *colour	9303201xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> 00 black</div> <div style="text-align: center;"> 01 red</div> <div style="text-align: center;"> 02 blue</div> <div style="text-align: center;"> 03 yellow</div> <div style="text-align: center;"> 04 green</div> <div style="text-align: center;"> 07 white</div> </div> <div style="text-align: right; margin-top: 5px;">Sn</div>
drawing	
technical data	
connection	solder connection
rated voltage ⁽¹⁾	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O ⁽³⁾
rated current ⁽¹⁾ (consider derating curve)	6 A
material socket	contact spring: copper - beryllium
housing material	PVC-P
standard	IEC 61010

2 mm system

⁽¹⁾ for normal environmental conditions -5°C to +40°C

⁽³⁾ without rated measurement category, for other circuits that are not directly connected to mains
stand: 10.01.2019