

CONUS cable gland

3xx PG


Configuration

Pressure screw	Polystyrene
Washer	Polyethylene PE-LD
Sealing ring	SBR/NBR
Gland body	Polystyrene
Connecting thread	Pg as per DIN 40430



Properties

Temperature range	-20°C +70°C	<ul style="list-style-type: none"> for application in installation sectors without special requirements
Protection grade	IP55	

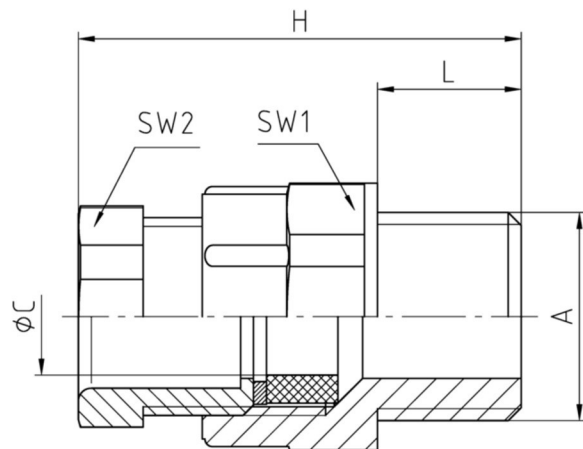


Features



RAL 7035

Connecting thread standard length

A	ØC	L	SW1	SW2	H		Part No.
	mm	mm	mm	mm	mm	Piece	
Pg 7	5 - 7	8	15	13	29	50	307 PG
Pg 9	6 - 8	8	19	16	30,5	50	309 PG
Pg 11	8 - 10	8	22	19	33	50	311 PG
Pg 13,5	10 - 12	9	24	21	34,5	50	s313 PG
Pg 16	12 - 14	10	27	23	39	50	316 PG
Pg 21	15 - 17	11	32	30	44	50	321 PG
Pg 29	24 - 26	11	42	40	45	25	329 PG
Pg 36	31 - 33	13	53	50	54	10	336 PG