

LUMILUX[®] T5 short

Versatile solutions for applications where space is restricted



LUMILUX[®] T5 short



QT-ECO


Benefits

- Ideal for cost-effective creative illumination and decoration
- Very good luminous flux maintenance throughout the life of the lamp

Product Features

- Compact and slim
- Good color Rendering Group 1B (R_a 80-89)
- Average life time: up to 10.000 h
- Available light colors: INTERNA (827), Warm White (830), Cool White (840)

Dimensions

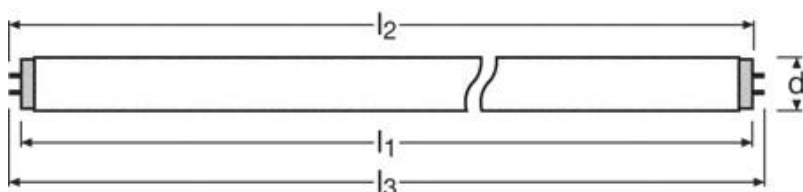

Description	Base	Length (l1) [mm]	Length (l2) min [mm]	Length (l2) max [mm]	Length (l3) [mm]	Tube Diameter (d) max [mm]
LUMILUX® T5 short 6 W	G5	212.1	216.8	219.2	226.3	16
LUMILUX® T5 short 8 W	G5	288.3	293.0	295.4	302.4	16
LUMILUX® T5 short 13 W	G5	516.9	521.6	524.0	531.1	16

Electrical Data¹

LUMILUX® T5 short CCG	Lamp Voltage rated [V]	Lamp Current rated [mA]	Pre-heat current rated [mA]
6 W	42	160	205
8 W	56	145	205
13 W	95	165	225

LUMILUX® T5 short ECG	Lamp Voltage in HF ² mode rated [V]	Lamp Current in HF mode rated [mA]	Pre-heat current rated [mA]
6 W	36	150	150
8 W	50	150	150
13 W	85	150	150

¹ According to IEC 60081 (measurement with reference control gear)

² High Frequency


Edition 08.2013. Subject to change without notice. Errors and omissions excepted. Always make sure to use the most recent release.

LP LPD EM

Photometrical Data³

LUMILUX [™] T5 short	Light Color LUMILUX [™]	Color Rendering Index (CRI), Ra	Target Color Coordinate X	Target Color Coordinate Y	Color Temperature [K]	Nominal Luminous Flux [lm]	Max. Luminous Flux [lm]	Energy Efficiency Class
6 W	830 Warm White	80 ... 89	0.440	0.403	3000	300	-	B
8 W	827 INTERNA	80 ... 89	0.463	0.420	2700	430	-	B
8 W	830 Warm White	80 ... 89	0.440	0.403	3000	430	-	B
8 W	840 Cool White	80 ... 89	0.380	0.380	4000	430	-	B
13 W	827 INTERNA	80 ... 89	0.463	0.420	2700	950	-	A
13 W	830 Warm White	80 ... 89	0.440	0.403	3000	950	-	A
13 W	840 Cool White	80 ... 89	0.380	0.380	4000	950	-	A

Relative Luminous Flux / Ambient Temperature

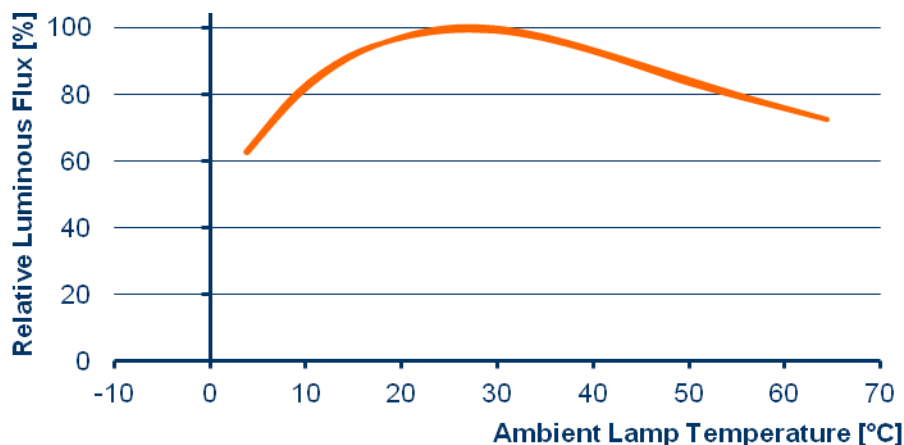

For more detailed information please refer to our technical guide for Fluorescent Lamps. Free download at www.osram.com

³ Measurement in accordance with EN 60081, annex C and the relevant annex on rated colour characteristics in IEC 60081.

Lifetime⁴

	ECG ⁵ (IEC 60081) preheat IEC 60901 switching cycle ⁶	CCG (IEC 60081) IEC 60901 switching cycle ⁶ (only for 18W – 36W)
B50⁷	10,000 h	8,000 h
Service life time⁸	7,000 h	5,600 h
LLMF⁹ 20.000 h	-	-
LLMF 16.000 h	-	-
LLMF 12.000 h	-	-
LLMF 8.000 h	-	-
LLMF 6.000 h	-	-
LLMF 4.000 h	-	-
LLMF 2.000 h	-	-
LSF¹⁰ 20.000 h	-	-
LSF 16.000 h	-	-
LSF 12.000 h	-	-
LSF 8.000 h	-	-
LSF 6.000 h	-	-
LSF 4.000 h	-	-
LSF 2.000 h	-	-

⁴ Measurement in accordance with EN 60081, annex C.

⁵ Electronic Control Gear

⁶ Switching cycle 165 min. on, 15 min. off (according to IEC 60901)

⁷ Average rated lamp life (B50) is the average value of the life time for an entity of lamps operated under standardized conditions until 50% failure. In other words, this is the operation time at which, for a standardized 3-hour switching cycle (165 minutes on / 15 minutes off (according to IEC)), 50% of a sample population of lamps have failed.

⁸ Service life time is the mathematical life time (maintenance multiplied with the % of failed lamps e.g. B10) for lamps in an installation after which the installation luminous flux (100 h value) decreased with 20 % (decrease in luminous flux and failed lamps) for indoor lighting.

⁹ Lamp Lumen Maintenance Factor (lamp luminous flux in %): Ratio of the luminous flux of a specific quantity of lamps at a defined number of hours of operation to their luminous flux at 100 h

¹⁰ Lamp Survival Factor (lamp survival in %): Ratio of the number of electrically intact lamps to the total number of lamps

Edition 08.2013. Subject to change without notice. Errors and omissions excepted. Always make sure to use the most recent release.

LP LPD EM

Energy labelling¹¹

Description	Energy efficiency class	Weighted energy consumption E _c [kWh/1000h]
LUMILUX® T5 short 6W/830	A	8
LUMILUX® T5 short 8W/827	A	8
LUMILUX® T5 short 8W/830	A	8
LUMILUX® T5 short 8W/840	A	8
LUMILUX® T5 short 13W/827	A	15
LUMILUX® T5 short 13W/830	A	15
LUMILUX® T5 short 13W/840	A	15

Logistic Data

Description	EAN 10	EAN 40	Packaging Unit
LUMILUX® T5 short 6W/830	4008321959874	4008321959973	25
LUMILUX® T5 short 8W/827	4050300008943	4050300608006	25
LUMILUX® T5 short 8W/830	4008321959881	4008321959980	25
LUMILUX® T5 short 8W/840	4050300241623	4050300241630	25
LUMILUX® T5 short 13W/827	4050300008967	4050300608013	25
LUMILUX® T5 short 13W/830	4008321959898	4008321959997	25
LUMILUX® T5 short 13W/840	4050300241647	4050300241654	25

¹¹ According to Regulation (EU) No 874/2012 of July 12, 2012
Edition 08.2013. Subject to change without notice. Errors and omissions excepted. Always make sure to use the most recent release.
LP LPD EM

Lamp/ECG System Combination

Lamp	ECG	EAN 10 ECG	Luminous Flux @25°C [lm]	System Power [W]	IN [A]	Power Factor ECG [λ]	System Luminous Efficacy [lm/W]	Length [mm]	Width [mm]	Height [mm]	Distance between holes [mm]	T _a [°C]
LUMILUX® T5 short 6 W	QT-ECO 1x4-16/220-240 L	4050300660370	270	8.5	0.06	0.60c	32	150	22	22	140	-15...+50
	QT-ECO 1x4-16/220-240 S	4050300638584	270	8.5	0.06	0.60c	32	80	40	22	72-75	-15...+50
	QT-ECO 2x5-11/220-240 S	4050300821504	560	14.5	0.11	0.60c	39	80	40	22	72-75	-15...+50
LUMILUX® T5 short 8 W	QT-ECO 1x4-16/220-240 L	4050300660370	450	10.5	0.07	0.60c	43	150	22	22	140	-15...+50
	QT-ECO 1x4-16/220-240 S	4050300638584	450	10.5	0.07	0.60c	43	80	40	22	72-75	-15...+50
	QT-ECO 2x5-11/220-240 S	4050300821504	900	17.5	0.13	0.60c	51	80	40	22	72-75	-15...+50
LUMILUX® T5 short 13	QT-ECO 1x4-16/220-240 L	4050300660370	950	15	0.08	0.60c	63	150	22	22	140	-15...+50
	QT-ECO 1x4-16/220-240 S	4050300638584	950	15	0.08	0.60c	63	80	40	22	72-75	-15...+50

For more information on ECG refer to <http://www.osram.com/ecg>

For more information on System Guarantee refer to <http://www.osram.com/guarantee>

In case of lamp breakage: www.osram.com/brokenlamp

For more information technical Information see Technical guide. Free download at www.osram.com