
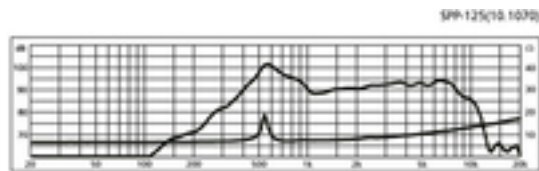


SPP-125 - Midrange Speaker

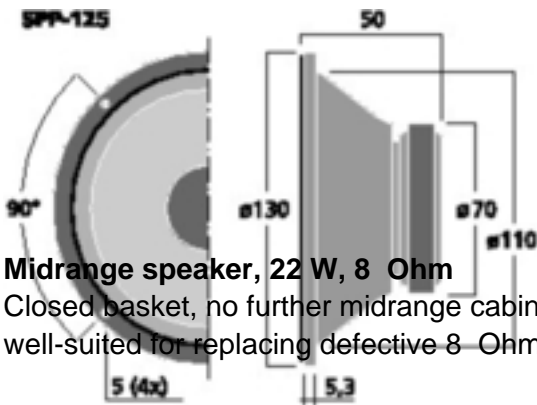

Midrange speaker, 22 W, 8 Ohm

Closed basket, no further midrange cabinet required. This series of speakers with polypropylene cone is very well-suited for replacing defective 8-Ohm speakers in hi-fi speaker systems.

Technical Data

Impedance (Z)	: 8 Ohm
Operating voltage	: -
Frequency range	: 800-8,000 Hz
Resonant frequency (fs)	: 550 Hz
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: -
Power rating	: 22 W
Peak music power output	: 45 W
Sensitivity	: 92 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle, horizontal	:
Radiation angle, vertical	:
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: 6.5 Ohm
Force factor (BxL)	: -
Voice coil induct. (Le)	: 0.2 mH
Voice coil diameter	: Ø 20 mm
Voice coil former	: aluminium
Linear excursion (X _{MAX})	: -
Eff. cone area (Sd)	: 73 cm ²
Magnet weight	: 150 g
Magnet diameter	: Ø 70 mm
Mounting cutout	: Ø 110 mm
Mounting depth	: 43 mm
Mounting hole diameter	: Ø 122 mm
Hole spacing X-axis	: 86 mm
Hole spacing Y-axis	: 86 mm
Dimensions	: Ø 131 mm x 50 mm
Outside diameter	: Ø 131 mm
Width	: Ø 131 mm



Height	:	-
Depth	:	50 mm
Protective class	:	
Admiss. ambient temp.	:	0-40 °C
Weight	:	0.472 kg
Sales unit	:	1
Type of speaker	:	