



PIN HEADERS

Pin header

Technical data:

Insulating material: High temp. Thermoplast UL 94V-0
 Contact material: Copper Alloy
 Plating: Gold
 Rated current: 3 Amp.
 Rated voltage: 150 V_{RMS}/V_{DC}
 Withstand voltage: 500 V_{RMS} for one minute
 Operating temperature: -40°C to +105°C
 Max. soldering temp.: 260°C for 10 seconds

pitch	rows	row distance	orientation	termination
2,54	2	2,54	right angled	through hole

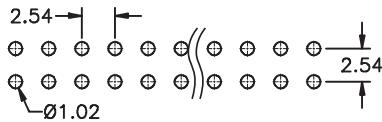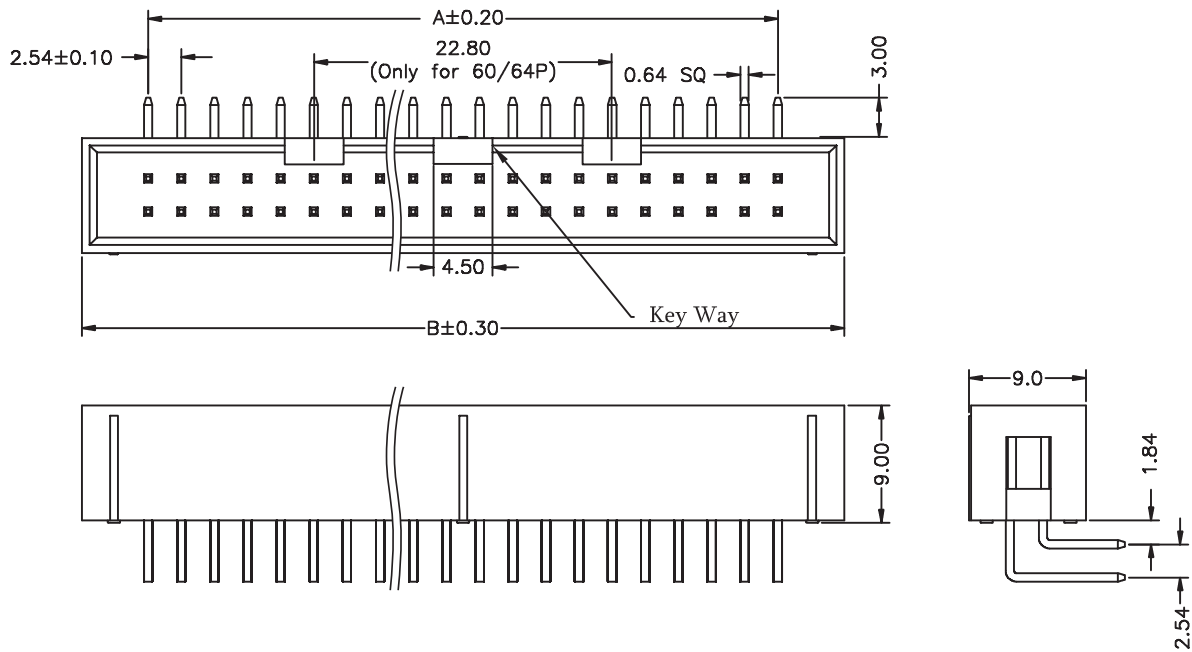

Recommended P.C.B Hole Layout

Pincount	Dimensions		Pincount	Dimensions	
	A	B		A	B
006	5.08	15.24	026	30.48	40.64
008	7.62	17.78	030	35.56	45.72
010	10.16	20.32	032	38.10	48.26
012	12.70	22.86	034	40.64	50.80
014	15.24	25.40	036	43.18	53.34
016	17.78	27.94	040	48.26	58.42
018	20.32	30.48	050	60.96	71.12
020	22.86	33.02	060	73.66	83.82
024	27.94	38.10	064	78.74	88.9

Pincount: see table

Plating: F = Au

Order code: **093-2-XXX-0-F-BS0A15**