


SF 4100	Rated Current A	Leakage Current @ 250V 50Hz	Inductance mH	Connections	Approvals			
SF 4100-1/01	1	0.3mA	1.6	6.3 x 0.8 Faston	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
SF 4100-2/01	2	0.3mA	2.7	6.3 x 0.8 Faston	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
SF 4100-3/01	3	0.3mA	1.8	6.3 x 0.8 Faston	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
SF 4100-5/01	5	0.3mA	1.4	6.3 x 0.8 Faston	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
SF 4100-10/01	10	0.3mA	0.5	6.3 x 0.8 Faston	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
SF 4100-20/01	20	0.3mA	0.5	6.3 x 0.8 Faston	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
SF 4100-20/05	20	0.3mA	0.5	8 x 32 UNC Stud	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Temperature Range: -25°C to +85°C
Operating Voltage: 250Vac
Operating Frequency: 0 to 400Hz
Test Voltage: L+N to ground, 2250Vdc, 2 seconds

Approved
 Submitted for Approval

DIMENSIONS

All dimensions are nominal and in mm

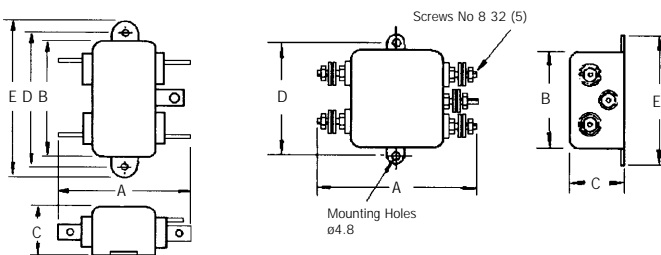

	1 & 2 AMP	3 & 5 AMP	10 AMP	20 AMP
A	53.4	63.5	63.5	82.0
B	45.9	45.9	45.9	52.4
C	17.0	20.0	29.4	29.4
D	54.1	54.1	54.1	60.4
E	64.2	64.2	64.2	71.3

CIRCUIT DIAGRAM

