


11ID-25ZA

pitch 2.54

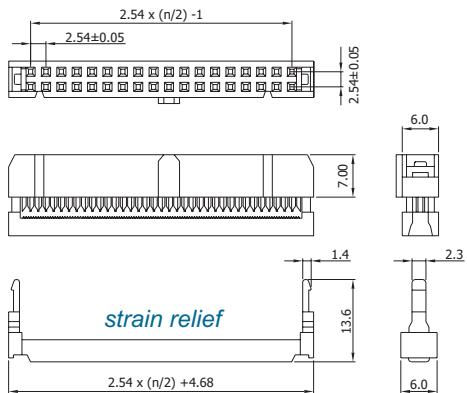

available pole no.: 06, 08, 10, 12, 14, 16, 18,
20, 24, 26, 28, 30, 32, 34,
40, 44, 50, 60, 64

technical data

contact material	:	copper alloy
insulator	:	high thermparature plastic
flammability	:	UL 94V-0
dielectric strength	:	500V AC for 1 minute
current rating	:	1A AC/DC
insulation resistance	:	1000 Meg Ohm min
contact resistance	:	20 milli Ohm max
operating temperature	:	-40°C to +105°C

plating

60= selective flash gold

strain relief

X= without
ZA= with

standard packing

tray

order code

