

Verbindungsbrücken

□ 0,63mm – 2mm, isoliert

Connecting bridges


□ 0,63mm – 2mm, insulated

Douilles de liaisons

□ 0,63mm – 2mm, isolées

Type Type Type	Bestell-Nr. Order No. No. de Cde	Isolation Griffteil Insulation handle Isolation	Temperaturbereich Operating temperature Température	Metallteile / Oberfläche Metal parts / plating Partie métallique / traitement	Bemessungsstrom Rated current Intensité assignée	Steckweite Plug spacing Entraxe	
			°C		A	mm	

1:1

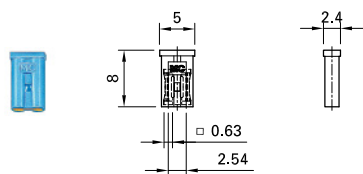

KB0,63-2,54/1

24.0058-*

PA

-40...80

Cu(Leg) ¹⁾
Cu(alloy) ¹⁾
Cu(alliage) ¹⁾


8

2,54

* Farben / Colours / Couleurs

22 23 24 28

1:1

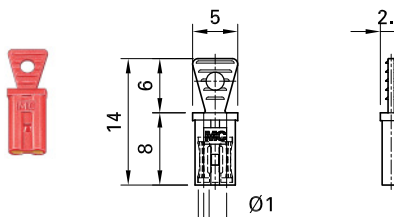

KB1-2,54

24.0052-*

PA

-40...80

Cu(Leg) ¹⁾
Cu(alloy) ¹⁾
Cu(alliage) ¹⁾


10

2,54

* Farben / Colours / Couleurs

22 23 24 28

1:1

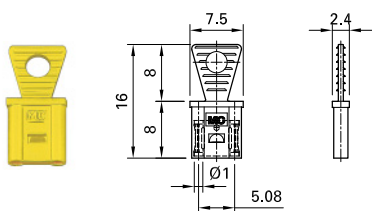

KB1-5,08

24.0050-*

PA

-40...80


Cu(Leg) ¹⁾
Cu(alloy) ¹⁾
Cu(alliage) ¹⁾

10

5,08

* Farben / Colours / Couleurs

22 23 24 28

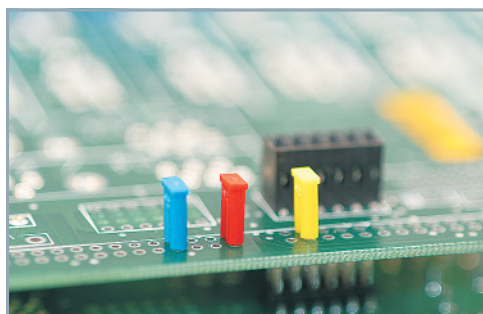¹⁾ Hartkupferlegierung, vergoldet¹⁾ Hard-drawn copper alloy, gold plated¹⁾ Alliage de cuivre dur, doré