



Elektrotechnik Karl-Heinz Mauz GmbH

GM12-N20VA-05450-298-26D (Artikel-Nr. 860508)

EKULIT

SPECIFICATIONS:

Item	Unit	Specification
Rated voltage	VDC	12.0
Gear Ratio		1/298
Rotation		CW
Motor Position		All position in horizontal
Temperature	°C	0~30
Humidity	%	30~95
• Performance of Motor		
No-load Speed	rpm	15.500±10%
No-load Current	mA	25 (max.)
Stall Current	mA	200 (max.)
Stall Torque	g.cm	11
• Performance of Gear motor		
Output Speed	rpm	50±10%
No-load Current	mA	35 (max.)
Stall Current	mA	200 (max.)
Stall Torque	kg.cm	3.0
Rated Torque	g.cm	800
Rated Current	mA	80 (max.)
Noise	dB	48
• The Dimension		
The Outside Shaft Length	mm	26
Shaft End Play	mm	0.05-0.50
Screw Size		M1.6*2.5mm
Dia of Shaft	mm	Ø3*2.5

Adresse: Felix-Wankel-Str. 35 • 73760 Ostfildern/Nellingen

Tel: +49-711/3414023

Fax: +49-711/3414024


E-mail: info@ekulit.de Web site: www.EKULIT.de

Elektrotechnik Karl-Heinz Mauz GmbH

GM12-N20VA-05450-298-26D (Artikel-Nr. 860508)

EKULIT

DIMENSIONS :
(Unit: mm)

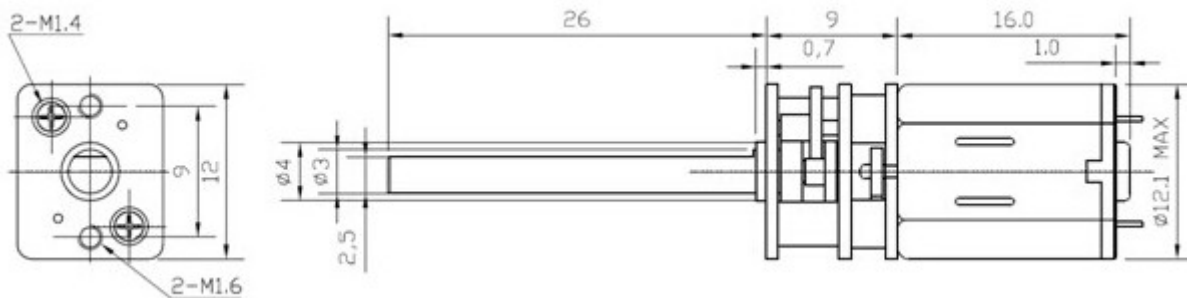

Curve drawings:

