





IDC-FEMALE HEADER 2,00 mm ID: 160 BL 22-0860IDC

Series 730

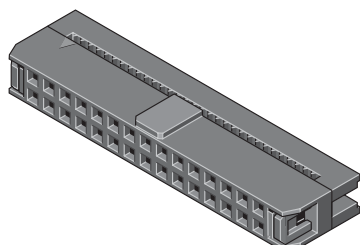

TECHNICAL DATA

Pitch	2,00 mm
Insulating Material	Thermoplast UL94V-0
Contact Material	phosphor bronze
Rated Current	1,5 Amp.
Rated Voltage	100 V _{RMS} /150 V _{DC}
Withstanding Voltage	500 V _{AC} for one minute
Operating Temperature	-40°C to +105°C

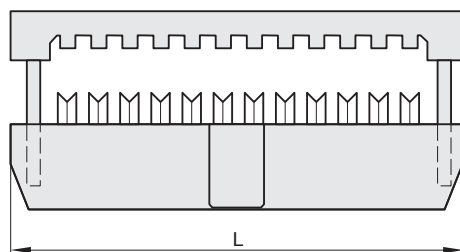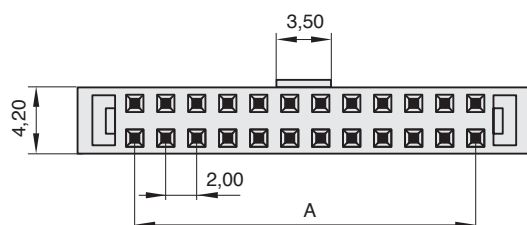

Poles	A	L
6	4,00	11,25
8	6,00	13,25
10	8,00	15,30
12	10,00	17,60
14	12,00	19,60
16	14,00	21,50
18	16,00	23,25
20	18,00	25,60
22	20,00	27,60
24	22,00	29,60
26	24,00	31,60
28	26,00	33,25
30	28,00	35,60
32	30,00	37,25
34	32,00	39,60
36	34,00	41,60
38	36,00	43,25
40	38,00	45,60
44	42,00	49,60
48	46,00	53,25
50	48,00	55,75
54	52,00	59,25
56	54,00	61,25
60	58,00	65,25
62	60,00	67,25
64	62,00	69,25
68	66,00	73,25
80	78,00	85,25

All dimensions in mm.
Other dimensions upon request.

	BL	22 - 0860	IDC - GT - XX	L	
22:		2 rows, pitch 2,00mm			L:
0860:		mounting height 8,60mm			RoHS-compliant with standard temp. plastic
Plating:	GT = sel. Au				Poles: 10 - 80 contacts possible