

Technical drawing of the AK(Z) 750 VERTICAL machine, showing front and side views with dimensions in mm.

Front View Dimensions:

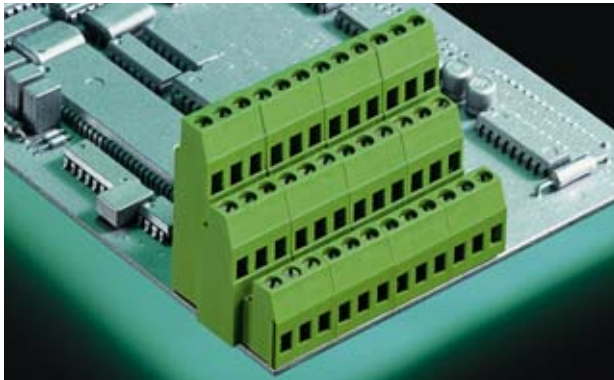
- Overall width: 15 (15, 24)
- Top section width: 2,5 (2,54)
- Distance between top sections: 0,6
- Distance between bottom sections: 19
- Bottom section width: 2,7 (2,54)
- Bottom section offset: 5 (5,08)
- Bottom section width: 5 (5,08)
- Bottom section offset: 0,9
- Bottom section width: 4,4
- Bottom section offset: 4

Side View Dimensions:

- Overall height: 21,5
- Top section height: 11,1
- Bottom section width: 15
- Bottom section offset: 5



2-12 poles, Spacing 5,0 mm and 5,08 mm
insert required no. of poles ..

[illegible]

2-12 poles, Spacing 5,08 mm
insert required no. of poles ..

Ratings:			
	UL 1059	CSA 22.2 No. 158	EN 30098
Rated Voltage	300 V	300 V	250 V
Rated Current	20 A	20 A	24 A (T60)
Wire Size	AWG 30-12	AWG 30-12	2,5 mm ²
Test Voltage			2,0 kV
Rated Torque / Screw Size			0,5 Nm/M3
Max. Rated Cross Section			
Single Wired (solid)			4,0 mm ²
Stranded Wire (flexible)			2,5 mm ²
Stranded wire with Ferrules			2,5 mm ²

Dimensions	
Spacing	5,0 mm (5,08 mm)
PCB Hole Diameter	1,3 mm
Stripped Length	8,0 mm
Materials	
Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Wire Guard	Cu
Colour	
green	RAL 6018

Ratings:			
	UL 1059	CSA 22.2 No. 158	EN 60998
Rated Voltage	300 V	300 V	250 V
Rated Current	20 A	20 A	24 A (T60)
Wire Size	AWG 30-12	AWG 30-12	2,5 mm²
Test Voltage			2,0 kV
Rated Torque / Screw Size			0,5 Nm/M3
Max. Rated Cross Section			
Single Wired (solid)			4,0 mm²
Stranded Wire (flexible)			2,5 mm²
Stranded wire with Ferrules			2,5 mm²

Dimensions	
Spacing	5,08 mm
PCB Hole Diameter	1,3 mm
Stripped Length	8,0 mm
Materials	
Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Wire Guard	Cu
Colour	
green	RAL 6018