



**FEMALE HEADER 2,00 mm**  
**ID: 318**                      BL 22-43G

Series 501



**TECHNICAL DATA**

Pitch	2,00 mm
Insulating Material	high temp. thermoplast UL94V-0
Contact Material	phosphor bronze
Rated Current	1,5 Amp.
Rated Voltage	100 V <sub>RMS</sub> /150 V <sub>DC</sub>
Withstanding Voltage	500 V <sub>AC</sub> for one minute
Operating Temperature	-40°C to +105°C
Maximum Soldering Temperature	260°C for 10 seconds

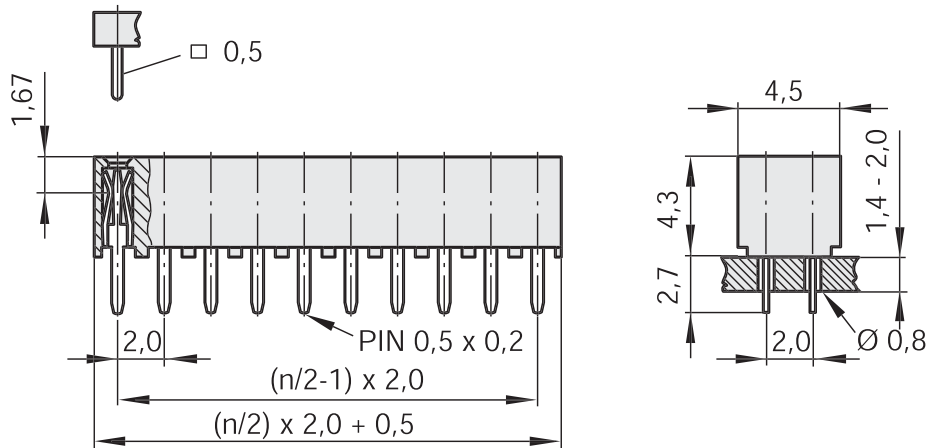

All dimensions in mm.  
 Other dimensions upon request.

**BL 22 - 43 G XX - XX U**

- 22: 2 rows, pitch 2,00mm
- 43: mounting height 4,30mm
- G: straight contacts
- Plating: TT = Sn  
 GG = Au
- U: RoHS-compliant with high temp. plastic
- Poles: 4 - 80 contacts possible

8 | 2,00 mm