
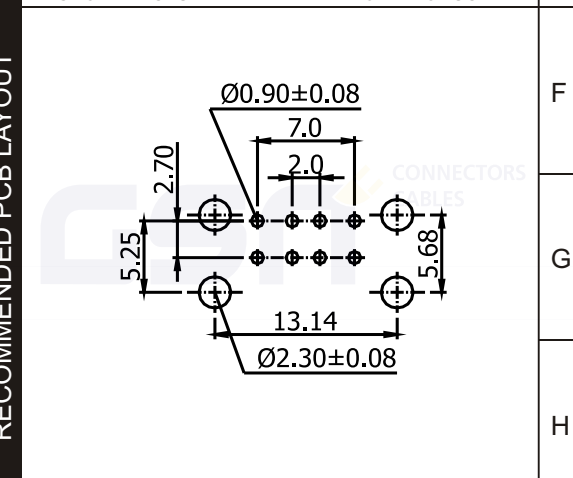


	1	2	3	4	5	6	7	8
A TECHNICAL DATA	01	INSULATOR MATERIAL	PBT		13	PACKING	TRAY	
	02	INSULATOR COLOR	BLACK (WHITE IF "W" IS MENTIONED IN PART NO.)		14	PLATING	SELECTIVE FLASH GOLD	
	03	FLAMMABILITY	UL 94V-0		15			
	04	CONTACT MATERIAL	PHOSPHOR BRONZE		16			
	05	SHELL	BRASS, NICKEL PLATED		17			
	06	VOLTAGE RATING	30V AC/DC		18			
	07	CURRENT RATING	1.0A AC/DC		19			
	08	INSULATION RESISTANCE	1000 MEG OHM MIN		20			
	09	CONTACT RESISTANCE	20 MILLI OHM		21			
	10	WITHSTANDING VOLTAGE	750 V / 1 MINUTE		22			
	11	OPERATING TEMPERATURE	-40°C TO +105°C		23			
	12	SUGGESTED SOLDERING CURVE	PLEASE CONTACT GSN		24			

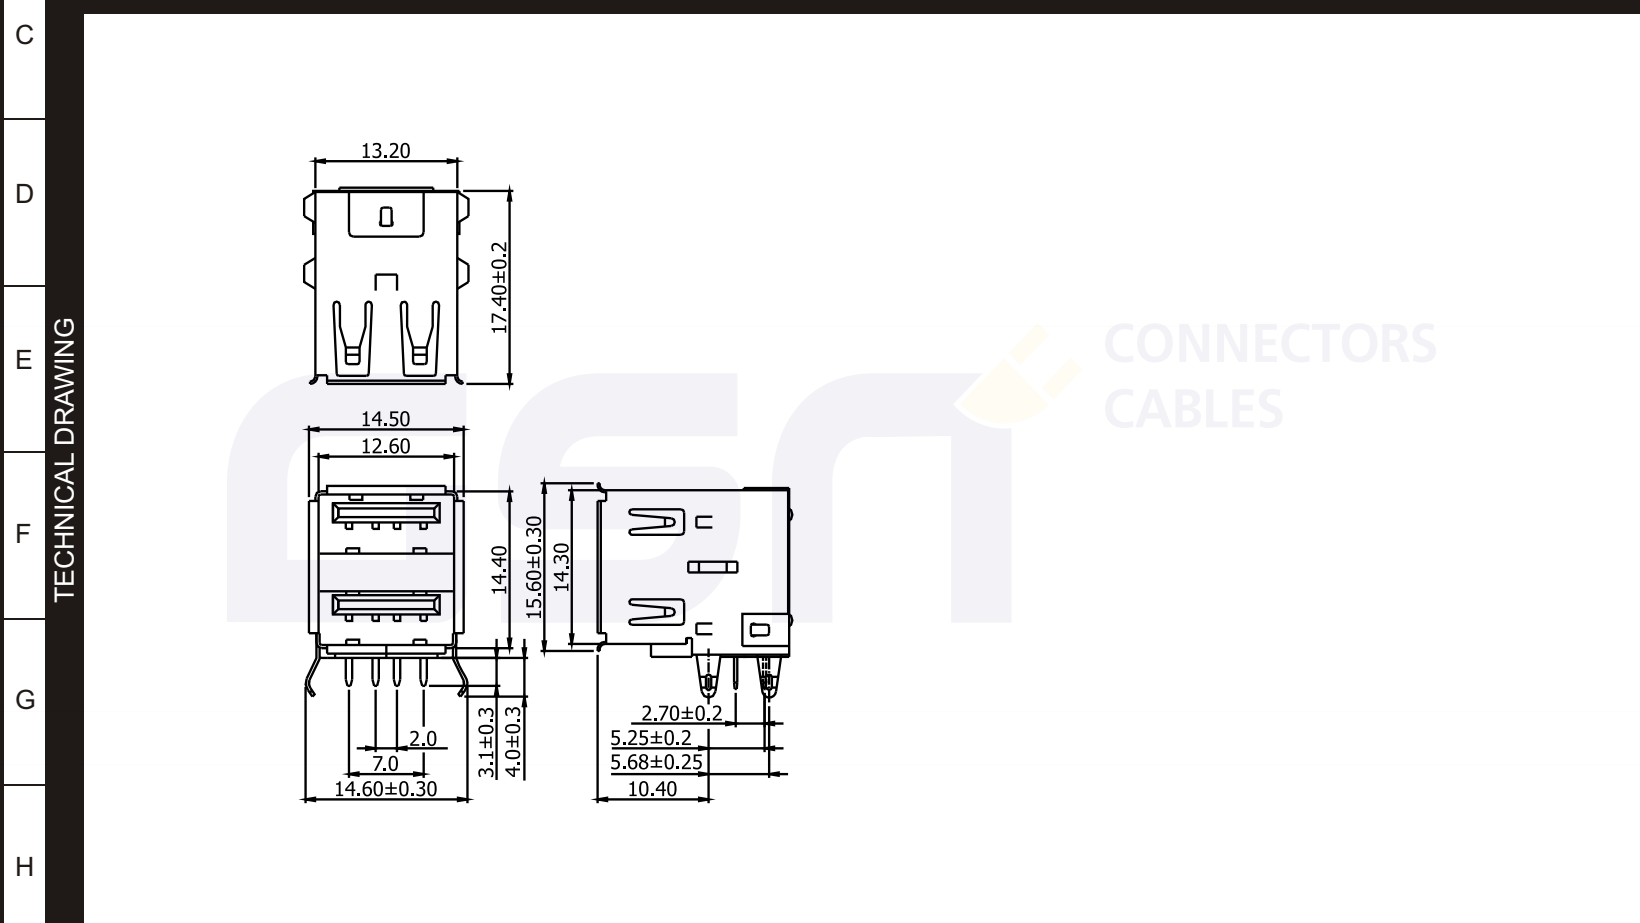

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

	REVISION:	TOPIC:	DATE:	NAME:	UNIT:	PART. NO.:	DESCRIPTION:
	01	FIRST RELEASE	23. Oct 2006	芮天娜	MM	47SFT9DE-A-P60	USB, THT, 90°
	02	CD CHANGE	28. Apr 2009	芮天娜	TOLERANCES (UNLESS OTHERWISE SPECIFIED):		
	03	DIM. 17.0/12.5/15.5/3.25/15.8/10.28	22. Dec 2009	芮天娜	x=±0.30MM x.x=±0.25MM x.xx=±0.15MM		
	04	ADD INSULATOR COLOR	11. Feb 2010	芮天娜	NO. OF PAGES:	COMPLIANT WITH:	
05	DESIGN CHANGE	19. May 2011	吴丹梅	1/1	ROHS		
							GSN ELECTRONICS PTE. LTD © HTTP://WWW.GSN.CN.COM