
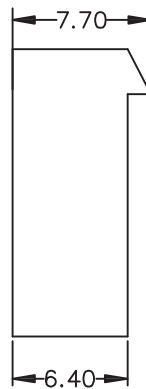


Housing


Technical data:

Insulating material: Nylon 66, UL 94V-2
 Rated current: 5 Amp.
 Rated voltage: 250 V_{RMS}/V_{DC}
 Withstand voltage: 1500 V_{RMS} for one minute
 Operating temperature: -25°C to +85°C

pitch	rows	row distance	orientation	termination
3,96	1			crimp

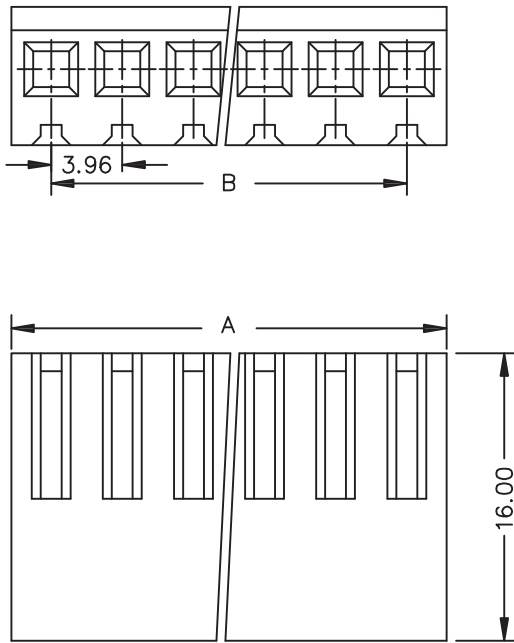

Pincount	Dimensions	
	A	B
002	8.45	3.96
003	12.39	7.92
004	16.35	11.88
005	20.31	15.84
006	24.27	19.80
007	28.23	23.76
008	32.19	27.72
009	36.15	31.68
010	40.11	35.64
011	44.07	39.60
012	48.03	43.56
013	51.99	47.52
014	55.95	51.48
015	59.91	55.44
016	63.87	59.40
017	67.83	63.36
018	71.79	67.32
020	79.71	75.24

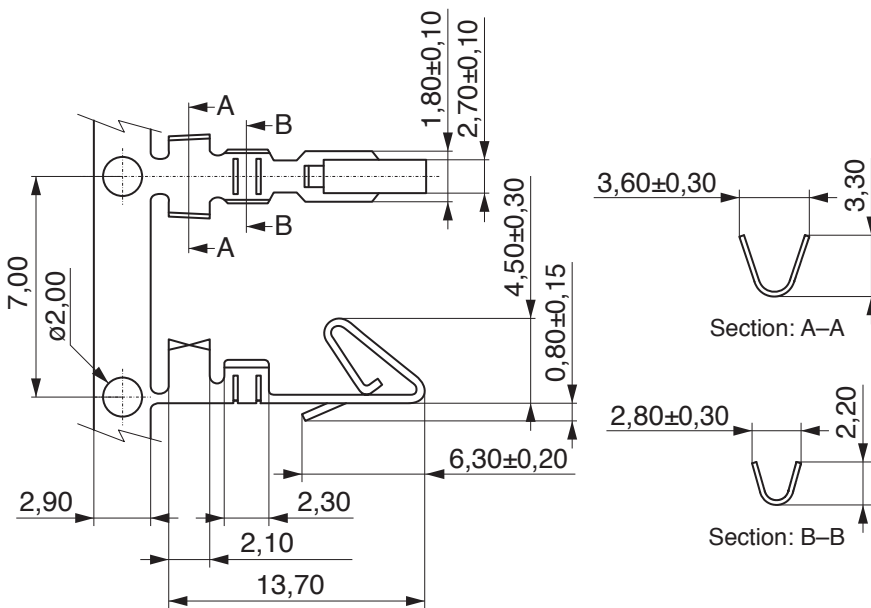

Order code for contact:
708-1-TX-XR

Material: Brass
 Plating: Tin
 Insulation O.D.: 2.80 - 1.40 mm
 Wire range: 18-24 AWG
 Q'ty/reel: 6000 pcs

Pincount: see table

Order code: **577-1-XXX-X-BS0**