


D-SUB with plastic strain relief

Technical data:

Insulating material: PBT, UL 94V-0
Contact material: Copper Alloy
Plating shell: Tin
Plating contact: Selective gold
Rated current: 3 Amp.
Withstand voltage: 500 V_{RMS} for one minute
Operating temperature: -55°C to +105°C

pitch	rows	row distance	orientation	termination
	2		straight	through hole

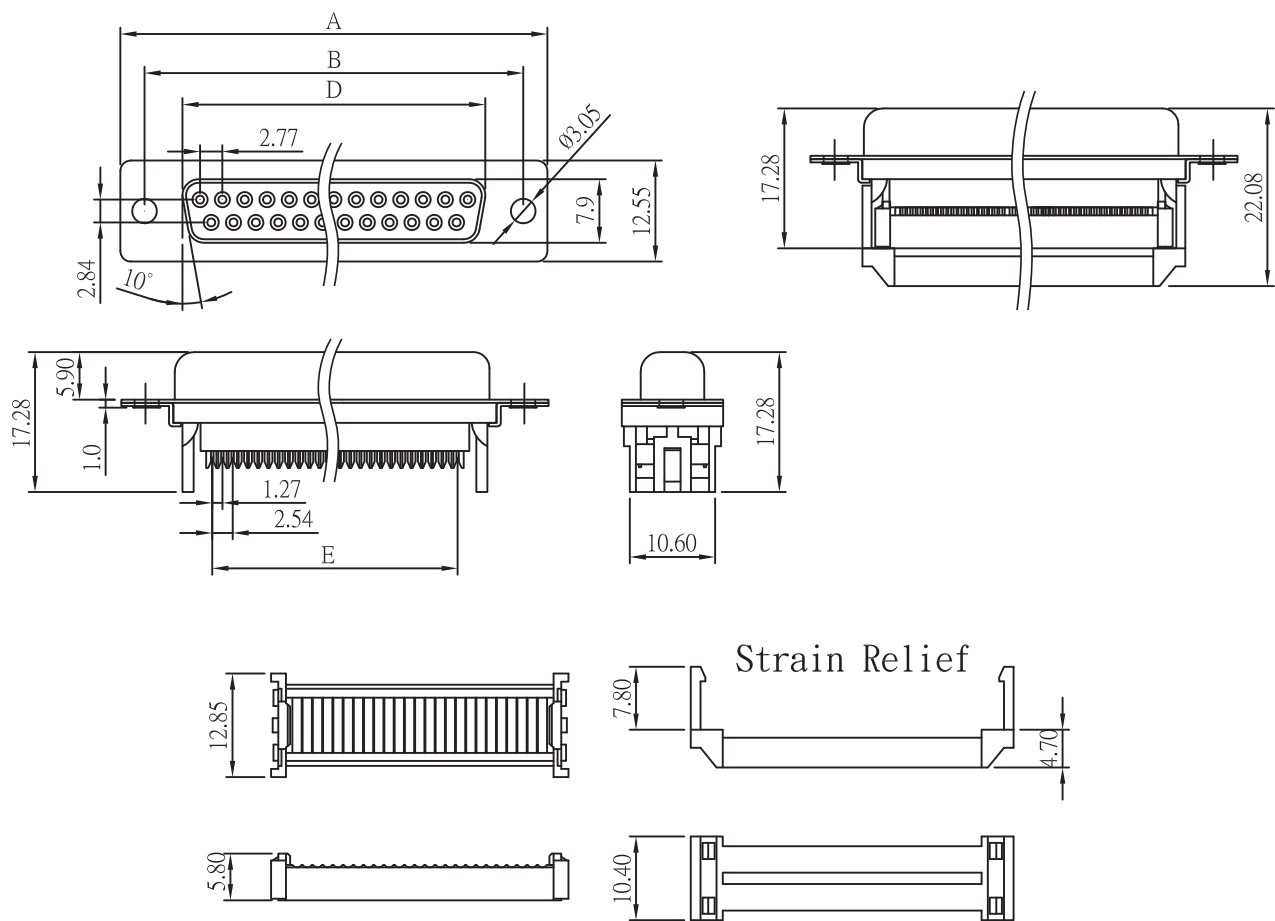

Dimensions				
Positions	A	B	D	E
9	30.81	24.99	16.33	10.16
15	39.14	33.32	24.66	17.78
25	53.04	47.04	38.38	30.48
37	69.32	63.50	54.84	45.72

- Pincount: see table
- Gender: F = Female
- Mounting option: A0 = Non accessories
- Colour: 0 = Black
- Plating shell: T = Sn
- Plating contact: S = Sel. Au

Order code: 706-1-XXXF-A00TS-BS0