


D-SUB with plastic strain relief

Technical data:

Insulating material: PBT, UL 94V-0
 Contact material: Copper Alloy
 Plating shell: Tin
 Plating contact: Selective gold
 Rated current: 3 Amp.
 Withstand voltage: 500 V_{RMS} for one minute
 Operating temperature: -55°C to +105°C

| | | | | |
|-------|------|--------------|-------------|--------------|
| pitch | rows | row distance | orientation | termination |
| | 2 | | straight | through hole |

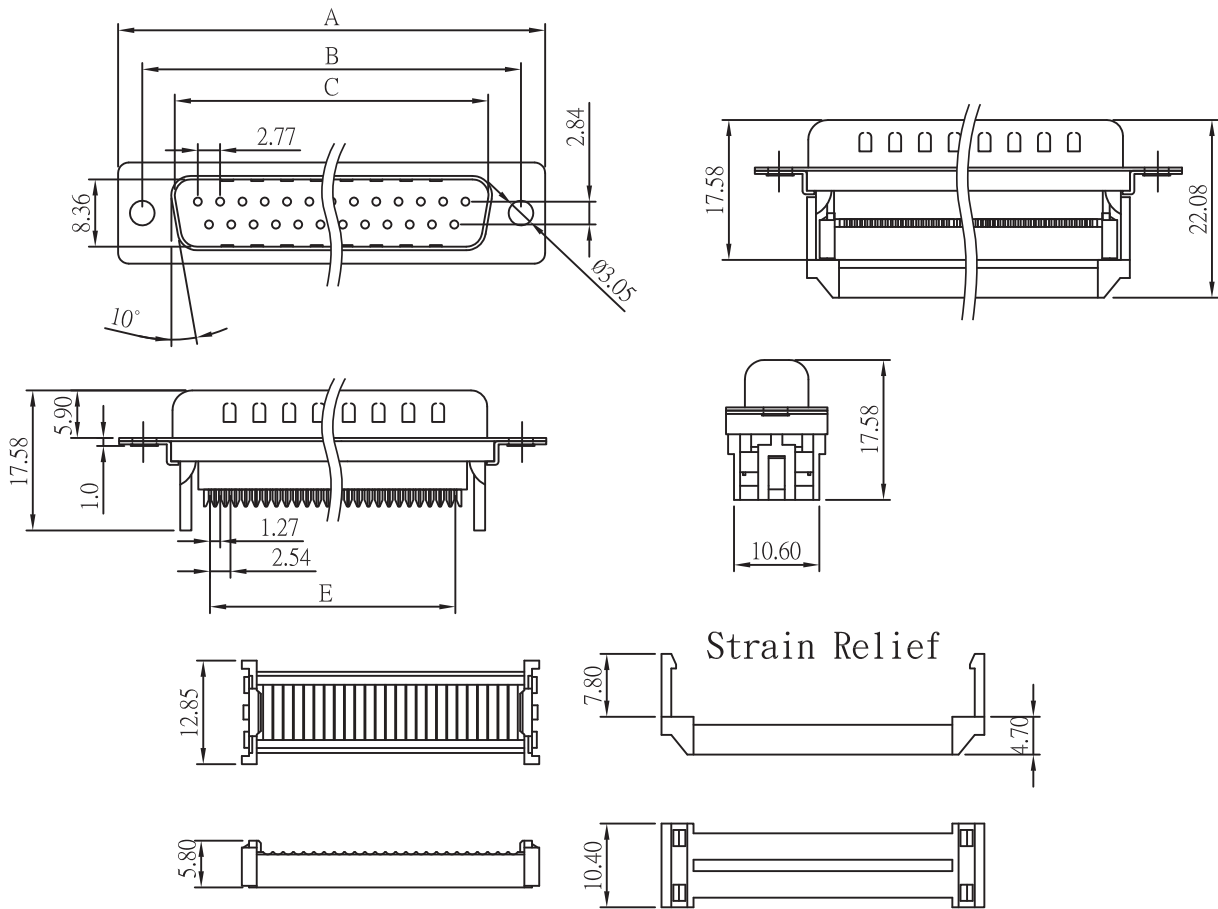

Dimensions

| Positions | A | B | C | E |
|-----------|-------|-------|-------|-------|
| 9 | 30.81 | 24.99 | 16.92 | 10.16 |
| 15 | 39.14 | 33.32 | 25.50 | 17.78 |
| 25 | 53.04 | 47.04 | 38.96 | 30.48 |
| 37 | 69.32 | 63.50 | 55.42 | 45.72 |

- Pincount: see table
- Gender: M = Male
- Mounting option: A0 = Non accessories
- Colour: 0 = Black
- Plating shell: T = Sn
- Plating contact: S = Sel. Au

Order code: **706-1-XXXM-A00TS-BS0**