

Euromas Aluminium / Euromas F05

Enclosure, aluminium



A 115

Order no.: 01115000

* = Available on request.

Characteristics

Colour of enclosure group
Grey, similar to RAL 7001

Protection class
IP 66

Enclosure Material
G Al Si 12, PU foamed seal; V215: Vestamid, CR seal; for details see Technical Information

Scope of delivery
Lid and base, lid screws made of V2A, earthing screw

Note


On the A 198, because of the wall-mounting drill holes inside the sealed lip, expert sealing of the wall-mounting is necessary to achieve protection class IP 66.

G = design with transparent lid (PC)

Dimensions

Dimensions
175 x 80 x 57 mm

Product drawing

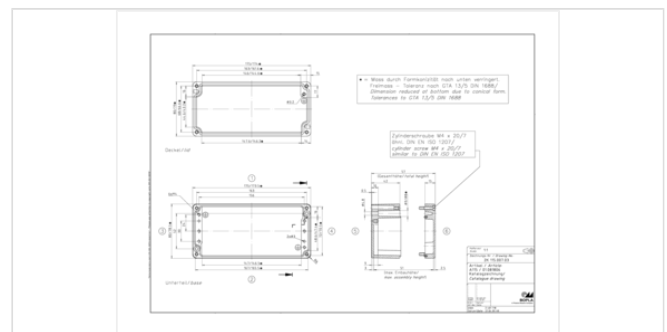

Important!

To compensate for pressure when temperatures change and cause moisture in the enclosure, we recommend that you use a **pressure compensation** element.

» [Additional information](#)

Technical documentation / Downloads

Technical drawings

3D product data in STEP format: [Registration necessary](#)

Product drawing in PDF format: [01115000 A-115.pdf](#) (72.1 KB)

Product drawing in DXF format: [01115000 A-115.dxf](#) (497.3 KB)

Drawing for mechanical processing: [01115000 A-115-G.dxf](#) (289.2 KB)

Milling contours are shown here as a DXF file. (Sub D, USB, HDMI, cable glands, ...)

Product Brochures

[Euromas Aluminium F05 GB.pdf](#) (1.8 MB)

Works Test Certificates

[682 WPZ-Euromas-Aluminium DE.pdf](#) (163.7 KB)

[682 WPZ-Euromas-Aluminium EN.pdf](#) (143.7 KB)

Suitable for the enclosure



Capstan-headed screws, sealable

21007915 **KP**

For A 100-118



Allen cheese-head screw for lid

21007920 **IS**

For A 101-118



Set of hinges

21007800 **SCHD**



Mounting panels for PK 105 - 115, galvanised sheet steel

21001300 **M**

For A 115, PK 115



DIN rails for PK 105 - 115, DIN EN 60715 TH 15

21003000* **TS 15**

For A 115, PK 115

