

**Isolierkörpermaterial**  
Nylon, UL94V-0

**Kontaktmaterial**  
Phosphorbronze

**Kontaktoberfläche**  
Ni, 6µ" Au / Sn

**Kontaktwiderstand**  
35mΩ max

**Isolationswiderstand**  
1000MΩ min

**Strombelastbarkeit**  
1.5A

**Betriebstemperatur**  
-40°C - +85°C

**Betriebsspannung**  
125V AC

**Prüfspannung**  
1000V AC

**Verpackung**  
Rollenverpackung

**Insulator material**  
Nylon (FR52), UL94V-0

**Contact material**  
Phosphor bronze

**Plating**  
Ni, 6µ" Au / Sn

**Contact resistance**  
35mΩ max

**Insulation resistance**  
1000MΩ min

**Current rating**  
1.5A



**Operating temperature**  
-40°C - +85°C

**Operating voltage**  
125V DC

**Test voltage**  
1000V AC

**Packing**  
Reel packing

Dimensions		
No. of contats	A	B
4 (RJ10)	11.20	7.00
6 (RJ12)	13.20	10.60
8 (RJ45)	15.10	12.50

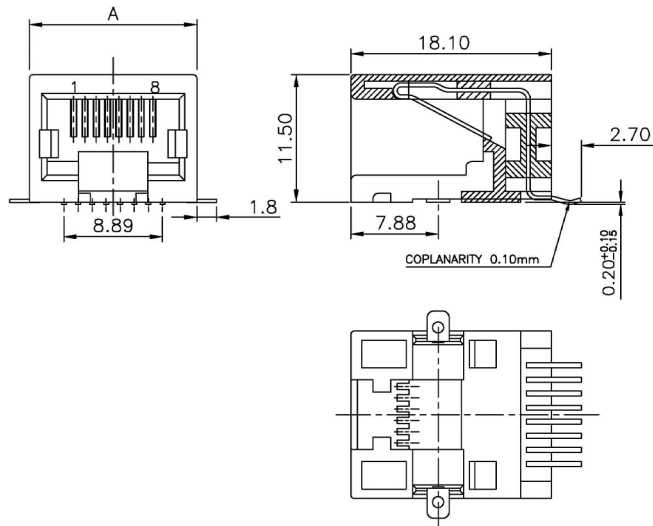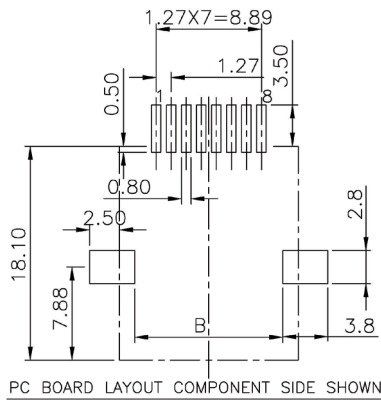

Bestellcode / Ordercode

Polzahl

- 0 - 4 polig (RJ10)
- 1 - 6 polig (RJ12)\*
- 2 - 8 polig (RJ45)\*

No. of contacts

- 0 - 4 contacts (RJ10)
- 1 - 6 contacts (RJ12)\*
- 2 - 8 contacts (RJ45)\*

**A - 2004 x - LP / SMT - A**

\* Standard  
\* Standard