
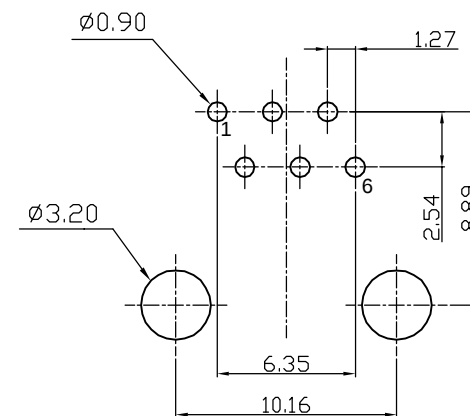
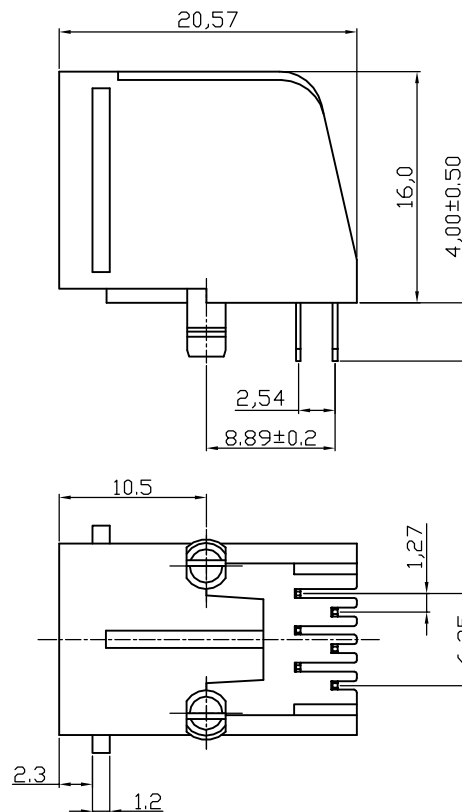


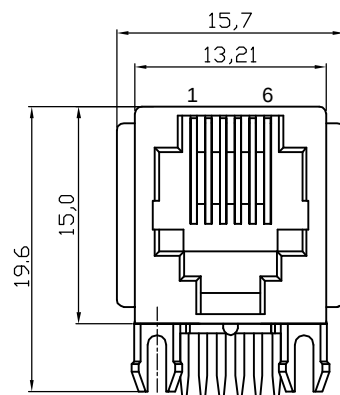

NOTES:

ELECTRICAL:

- | | |
|--------------------------|-------------------------------|
| 1. VOLTAGE RATING | : 125 VAC MIN. |
| 2. CURRENT RATING | : 1.5 AMP MIN. |
| 3. CONTACT RESISTANCE | : 50 MILLIOHMS MAX. |
| 4. INSULATION RESISTANCE | : 1000 MEGOHMS MIN @ 500 VDC. |
| 5. DIELECTRIC STRENGTH | : 1000 VAC 60HZ, 1MIN. |

MECHANICAL:

- | | |
|------------------------------|---|
| 1. HOUSING MATERIAL | : HIGH TEMP. UL94V-0. |
| 2. CONTACT MATERIAL | : PHOSPHOR BRONZE $\pm 0.35\text{mm}$. |
| 3. PLATING | : 1. CONTACT AREA - 6u" SELECTIVE GOLD PLATING.
2. TAILS- PLATED TIN OVER NICKEL |
| 4. OPERATING LIFE | : 750 CYCLES MIN. |
| 5. PCB RETENTION PRE-SOLDER | : 1 LB MIN. |
| 6. PCB RETENTION POST-SOLDER | : 10 LBS MIN. |

ENVIRONMENTAL:

- ENVIRONMENTAL**
- | | |
|----------------------------|-------------------------------|
| 1. STORAGE | : -40°C TO +85°C. |
| 2. OPERATION | : -40°C TO +85°C. |
| 3. WAVE SOLDER TEMPERATURE | : 255°C TO 265°C 5-10 SECOND. |

RoHS compliant

Unit: mm



File No.: E345352

Scale	1:1					Date	Name	Customer-No.		G	
TOLERANCE						Drawn	02.07.2009	Dean	ASSMANN WSW-No. A-20041		
.X	±0.20					Approved	02.07.2009	Hellwig			
.XX	±0.15										
.XXX	±0.10										
DIM	TOL								Drawing-No.		H
Angle	±5°										
		①	Drawn	02.07.2009	Dean				Replace		
		Id.	Modification	Date	Name						