


PC Board Layout  
Component Side Shown  
PC Board For T=1,60mm

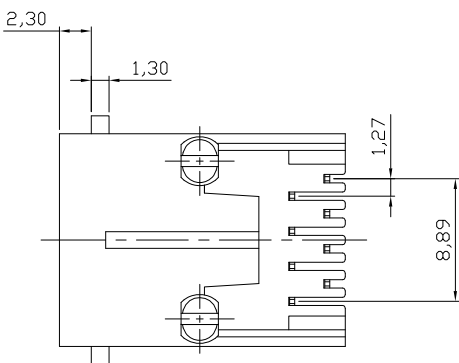

NOTES:

Mechanical:

- Housing material : Glass Filled Polyester UL94V-0, Color: Black
- Contact material: Phosphor Bronze  $t=0.35\text{mm}$
- Contact plating: Contact area---6u" Gold plating  
Tails---Tin plated all over 50u" Nickel
- Operating Life: 750 Cycles min.
- PCB Retention Pre-solder: 1 LB min.
- PCB Retention Post-solder: 10 LBS min.

Electrical:

- Voltage Rating: 125VAC.
- Current Rating: 1.5AMP.
- Contact Resistance: 50mΩ max.
- Insulation Resistance: 1000MΩ min. @ 500 VDC
- Dielectric Strength: 1000 VAC 60Hz, 1 min.

Environmental:

- Storage: -40°C To +85°C
- Operation: -40°C~+85°C
- Wave Soldering Temp: 200~220°C(5~10S)

② Packing: 90pcs/Tray, 3600pcs/Carton

RoHS compliant  
Unit:mm



File No.: E345352

Scale	Free				Date	Name	Customer-No.
TOLERANCE					Drawn	02.07.2009	Dean
X.X	±0.20				Approved	27.05.2013	Amy
X.XX	±0.15						
X.XXX	±0.10						
DIM	TOL	② Update	27.05.2013	Amy	 ASSMANN components		
		① Drawn	02.07.2009	Dean			
Angle	±5°	Id.	Modification	Date			

Customer-No.

ASSMANN WSW-No.

A-20042

Drawing-No.

ASS 0485 CO

rev02

Replace

SHEET

1

2

3

4

5

6

7

A

A

B

B

C

C

D

D

E

E

F

F

G

G

H

H

1

2

3

4

5

6

7