

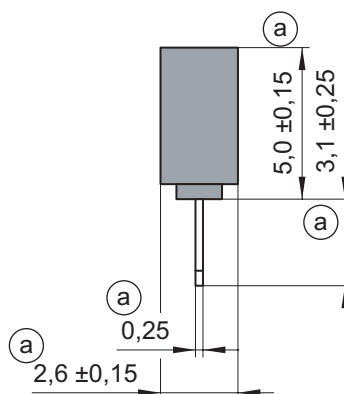
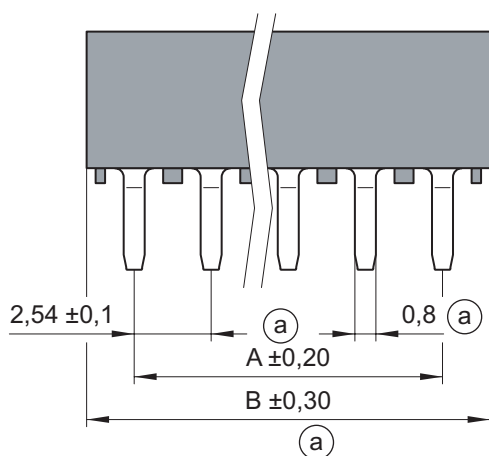



Buchsenleiste / Female Header

Technical data:

Insulator:	Thermoplastic, UL94-V0, Black
Contact:	Phosphor bronze
Plating:	Gold flash plated, lead-free
Current rating:	3 Amp.
Insulation resistance:	5000 MOhm min.
Contact resistance:	20 mOhm max.
Dielectric withstanding:	AC 500 V
Operating temperature:	-40°C to +105°C

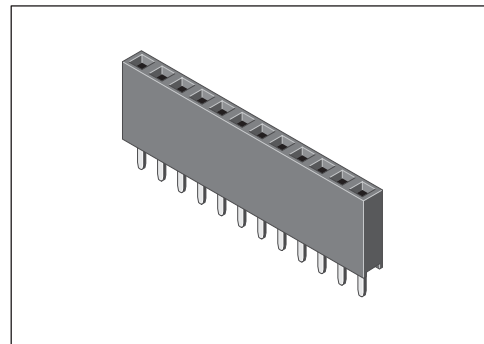

Recommended P.C.B. Layout (P.C.B. Tolerance ±0,05)



No. of contacts	Dimensions		No. of contacts	Dimensions	
	A	B		A	B
2	2,54	5,58	22	53,34	56,38
3	5,08	8,12	23	55,88	58,92
4	7,62	10,66	24	58,42	61,46
5	10,16	13,20	25	60,96	64,00
6	12,70	15,74	26	63,50	66,54
7	15,24	18,28	27	66,04	69,08
8	17,78	20,82	28	68,58	72,62
9	20,32	23,36	29	71,12	74,16
10	22,86	25,90	30	73,66	76,70
11	25,40	28,44	31	76,20	79,24
12	27,94	30,98	32	78,74	81,78
13	30,48	33,52	33	81,28	84,32
14	33,02	36,06	34	83,82	86,86
15	35,56	38,60	35	86,36	89,40
16	38,10	41,14	36	88,90	91,94
17	40,64	43,68	37	91,44	94,48
18	43,18	46,22	38	93,98	97,02
19	45,72	48,76	39	96,52	99,56
20	48,26	51,30	40	99,06	102,10
21	50,80	53,84			

BL1-50GGG-xxx U