



## SPECIFICATION FOR APPROVAL

<b>CUSTOMER :</b>	<b>DATE :</b> 24-09-2009 DD/MM/YYYY	
<b>CUSTOMER P/N :</b>		
<b>C.T.C. P/N :</b> EC24XXXX-XXXXXX-X	<b>SAMPLE Q'TY :</b>	
<b>PRODUCT NAME :</b> EC24XXX-XXXX-XXX-VERXX		
<b>DRAWN BY :</b>	<b>CHECKED BY :</b>	<b>APPROVED BY :</b>
<b>Ke Youfang</b>	<b>Tao Guowen</b>	<b>Tao Guowen</b>

## APPROVED BY CUSTOMER

	SIGNATURE	DATE
APPROVED		
CONDITIONAL APPROVED		
REJECTED		



**C.T.C. Coils Limited 確力新實業有限公司**

香港新界大埔汀角路 55 號太平工業中心 2 座 8 字樓 E 室  
 Flat E, 8/F, Block 2, Tai Ping Ind. Centre, 55 Ting Kok Rd., Tai Po., N.T., Hong Kong  
 Tel : (852) 2695-4889 Fax : (852) 2695-1842  
<http://www.ctccoils.com> E-mail : [enquiry@ctccoils.com](mailto:enquiry@ctccoils.com)

**C.T.C. Electronics (Fonggang) Factory 東莞確力新電子廠**

中國廣東省東莞市鳳崗鎮雁田區南山工業城第一棟  
 Nanshan Industrial District, Yantian Village, Fenggang Town, Dongguan City,  
 Guangdong Province, China, P.R.C.  
 Tel : (86)769-87771591 Fax : (86)769-87771314

**C.T.C. Electronics (Tangxia) Limited 東莞確一新電子有限公司**

中國廣東省東莞市塘廈林村新太陽工業城第十七棟  
 No.17, New Sun Industrial City, Tang Xia Town, Lin Cun, Dongguan City,  
 Guangdong Province, China, P.R.C.  
 Tel : (86)769-87811682 Fax : (86)769-87811382

SPECIFICATION FOR:


REF.:

## SPECIFICATION FOR APPROVAL

<b>C.T.C. P/N:</b>	EC24XXXX-XXXXXX-X	<b>DATE:</b> DD/MM/YYYY	24-09-2009
<b>PRODUCT NAME:</b>	EC24XXX-XXXX-XXX-VERXX		


### 1. DIMENSION (UNIT:mm):

Packaging Type: B

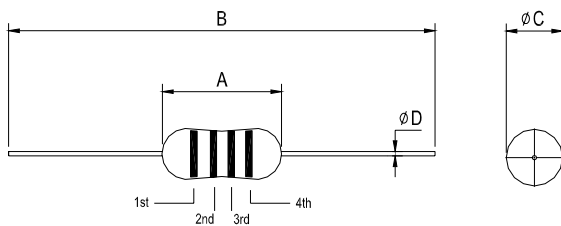


A: 7.0 Max. B: 63.0±1.0 C: 3.0 Max. D: 0.50±0.05

U-Forming:

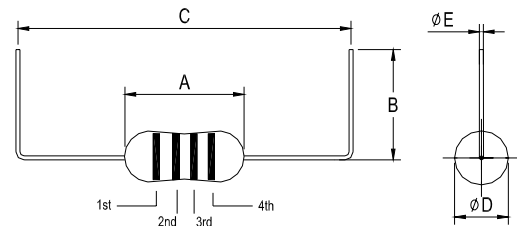


A: 7.0 Max. B: 3.6 Min. C: 10.0±1.0 D: 3.0 Max. E: 0.50±0.05

Packaging Type: T、R、T26

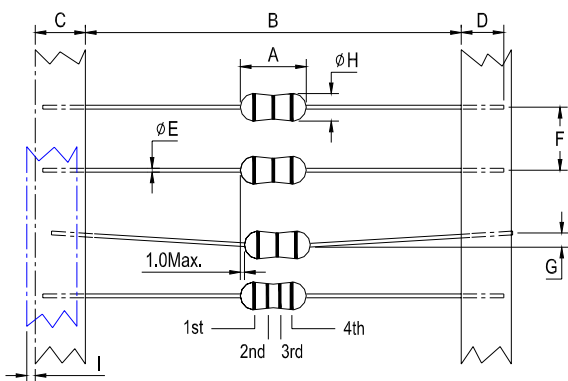

A: 7.0 Max. B: 52.4±1.5(T,R) 26.0±1.0(T26) C: 6.0±1.0 D: 3.2Min.  
 E: 0.50±0.05 F: 5.0±0.5 G: 1.0 Max. H: 3.0 Max. I: 1.0 Max.

F-Forming:

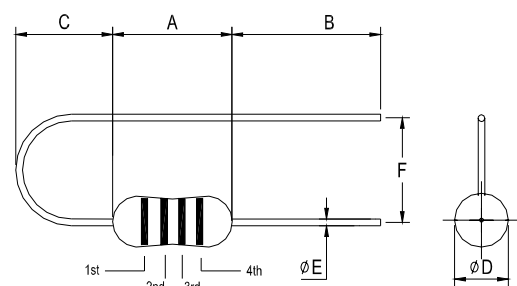

A: 7.0 Max. B: 3.6Min. C: 4.0Max. D: 3.0 Max.  
 E: 0.50±0.05 F: 5.0±1.0

**DRAWN BY :**

**CHECKED BY :**

**APPROVED BY :**

**Ke Youfang**

**Tao Guowen**

**Tao Guowen**

SPECIFICATION FOR:

REF.:

## SPECIFICATION FOR APPROVAL

<b>C.T.C. P/N:</b>	EC24XXXX-XXXXXX-X	<b>DATE:</b> DD/MM/YYYY	24-09-2009
<b>PRODUCT NAME:</b>	EC24XXX-XXXX-XXX-VERXX		

### 2. ELECTRIC CHARACTERISTICS:( Operating temperature: -20°C to+ 80°C )

Part Number	Inductance ( uH )	Tolerance	Q Min	Testing Freq. of L & Q ( MHz )	S.R.F ( MHz ) Min.	DCR ( Ω ) Max.	Rated Current ( mA )	Color Code			
								1st	2nd	3rd	4th
EC24R10A-50BB00-X	0.10	K · M	30	25.2	280	0.085	1400	Bn	Bk	S	Bk
EC24R12A-50BB01-X	0.12	K · M	30	25.2	280	0.085	1350	Bn	R	S	Bk
EC24R15A-50BB02-X	0.15	K · M	30	25.2	280	0.095	1270	Bn	Gn	S	Bk
EC24R18A-50BB03-X	0.18	K · M	30	25.2	280	0.12	1200	Bn	Gy	S	Bk
EC24R22A-50BB04-X	0.22	J · K · M	40	25.2	280	0.15	1150	R	R	S	Bk
EC24R27A-50BB05-X	0.27	J · K · M	40	25.2	260	0.15	1110	R	V	S	Bk
EC24R33A-50BB06-X	0.33	J · K · M	40	25.2	260	0.15	1110	O	O	S	Bk
EC24R39A-50BB07-X	0.39	J · K · M	40	25.2	220	0.17	1000	O	W	S	Bk
EC24R47A-50BB08-X	0.47	J · K · M	40	25.2	200	0.17	1000	Y	V	S	Bk
EC24R56A-50BB09-X	0.56	J · K · M	40	25.2	180	0.17	950	Gn	Be	S	Bk
EC24R68A-50BB10-X	0.68	J · K · M	40	25.2	160	0.18	900	Be	Gy	S	Bk
EC24R82A-50BB11-X	0.82	J · K · M	40	25.2	140	0.18	900	Gy	R	S	Bk
EC241R0A-50BB12-X	1.00	J · K · M	40	25.2	135	0.18	815	Bn	Bk	Gd	S
EC241R2A-50BB13-X	1.20	J · K · M	40	7.96	135	0.18	740	Bn	R	Gd	S
EC241R5A-50BB14-X	1.50	J · K · M	40	7.96	130	0.2	700	Bn	Gn	Gd	S
EC241R8A-50BB15-X	1.80	J · K · M	40	7.96	125	0.23	655	Bn	Gy	Gd	S
EC242R2A-50BB16-X	2.20	J · K · M	40	7.96	80	0.25	630	R	R	Gd	S
EC242R7A-50BB17-X	2.70	J · K · M	40	7.96	80	0.28	595	R	V	Gd	S
EC243R3A-50BB18-X	3.30	J · K · M	40	7.96	70	0.3	575	O	O	Gd	S
EC243R9A-50BB19-X	3.90	J · K · M	40	7.96	65	0.32	555	O	W	Gd	S
EC244R7A-50BB20-X	4.70	J · K · M	40	7.96	45	0.35	530	Y	V	Gd	S
EC245R6A-50BB21-X	5.60	J · K · M	40	7.96	40	0.4	500	Gn	Be	Gd	S
EC246R8A-50BB22-X	6.80	J · K · M	40	7.96	30	0.45	470	Be	Gy	Gd	S
EC248R2A-50BB23-X	8.20	J · K · M	40	7.96	28	0.56	425	Gy	R	Gd	S
EC24100A-50BB24-X	10.00	J · K · M	40	7.96	22	0.72	370	Bn	Bk	Bk	S
EC24120A-50BB25-X	12.00	J · K · M	40	2.52	20	0.8	350	Bn	R	Bk	S
EC24150A-50BB26-X	15.00	J · K · M	40	2.52	16	0.88	335	Bn	Gn	Bk	S
EC24180A-50BB27-X	18.00	J · K · M	40	2.52	15	1	315	Bn	Gy	Bk	S
EC24220A-50BB28-X	22.00	J · K · M	40	2.52	13	1.2	285	R	R	Bk	S

<b>DRAWN BY :</b>	<b>CHECKED BY :</b>	<b>APPROVED BY :</b>
<b>Ke Youfang</b>	<b>Tao Guowen</b>	<b>Tao Guowen</b>

EC24270A-50BB29-X	27.00	J、K、M	40	2.52	11	1.35	270	R	V	Bk	S
EC24330A-50BB30-X	33.00	J、K、M	40	2.52	10	1.5	255	O	O	Bk	S
EC24390A-50BB31-X	39.00	J、K、M	40	2.52	9.5	1.7	240	O	W	Bk	S
EC24470A-50BB32-X	47.00	J、K、M	50	2.52	8.5	2.3	205	Y	V	Bk	S
EC24560A-50BB33-X	56.00	J、K、M	50	2.52	7.5	2.6	195	Gn	Be	Bk	S
EC24680A-50BB34-X	68.00	J、K、M	50	2.52	6.5	2.9	185	Be	Gy	Bk	S
EC24820A-50BB35-X	82.00	J、K、M	50	2.52	6	3.2	175	Gy	R	Bk	S
EC24101A-50BB36-X	100.00	J、K、M	50	2.52	5.5	3.7	165	Bn	Bk	Bn	S
EC24121A-50BB37-X	120.00	J、K、M	60	0.796	5.4	3.8	160	Bn	R	Bn	S
EC24151A-50BB38-X	150.00	J、K、M	60	0.796	4.75	4.9	150	Bn	Gn	Bn	S
EC24181A-50BB39-X	180.00	J、K、M	60	0.796	4.35	5.5	140	Bn	Gy	Bn	S
EC24221A-50BB40-X	220.00	J、K、M	60	0.796	4	6.5	130	R	R	Bn	S
EC24271A-50BB41-X	270.00	J、K、M	60	0.796	3.7	7.5	120	R	V	Bn	S
EC24331A-50BB42-X	330.00	J、K、M	60	0.796	3.4	9.5	100	O	O	Bn	S
EC24391A-50BB43-X	390.00	J、K、M	60	0.796	2.8	10.5	95	O	W	Bn	S
EC24471A-50BB44-X	470.00	J、K、M	60	0.796	2.56	17.5	90	Y	V	Bn	S
EC24561A-50BB45-X	560.00	J、K、M	60	0.796	2.35	19.5	85	Gn	Be	Bn	S
EC24681A-50BB46-X	680.00	J、K、M	60	0.796	2	20	75	Be	Gy	Bn	S
EC24821A-50BB47-X	820.00	J、K、M	60	0.796	1.6	23.7	65	Gy	R	Bn	S
EC24102A-50BB48-X	1000.00	J、K、M	50	0.796	1.15	30	60	Bn	Bk	R	S

**NOTE:**

-X: Packaging Type  
 -B: BULK  
 -T: TAPE & BOX  
 -R: TAPE & REEL

A: Inductance Tolerance:  
 J: ±5%  
 K: ±10%  
 M: ±20%

**BB:PRODUCT TYPE AND TOLERANCE PARAMETERS:**

TELERANCE	TYPE					
	B	T	R	T26	U	F
J	22	25	28	31	34	37
K	21	24	27	30	33	36
M	20	23	26	29	32	35

**3. Packaging Quantities(PCS):**

1. Plastic sack: 2.0KPCS/PACK.
2. Tape & box: 3.0KPCS/BOX.
3. Tape & reel: 5.0KPCS/REEL.
4. U-Forming: plastic sack: 2.0KPCS/BOX.
5. F-Forming: plastic sack: 1.5KPCS/BOX.

<b>DRAWN BY :</b>	<b>CHECKED BY :</b>	<b>APPROVED BY :</b>
<b>Ke Youfang</b>	<b>Tao Guowen</b>	<b>Tao Guowen</b>