



Bussbar configuration (top view)

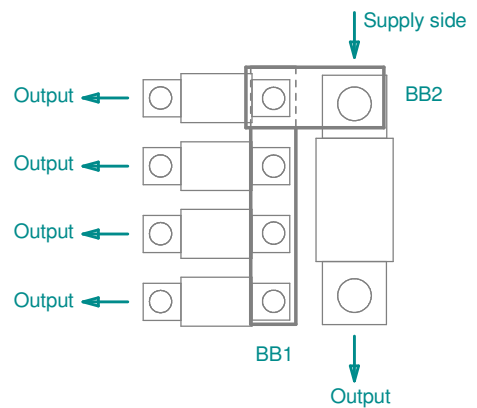

Note: BB2 can be placed on other side of megaOTO fuse, also switching supply and output

Additional information:
 Bussbar dimensions: BB1 1.5x12x68mm, BB2 2x16x36.5mm (WxHxL)
 Bussbar dimension tolerance: W: ± 0.3mm, H: ± 0.5mm, L: ± 1.0mm
 Bussbar material: Copper, Cu
 Max fuse rating: 4 x 200A midiOTO, megaOTO not limited
 Torque range: midiOTO (M5) 2 - 3 Nm, megaOTO (M8) 7 - 9 Nm

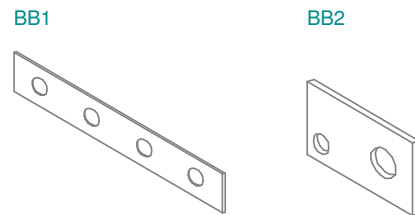

Revisions			Date	Appr.		
	Date	Type	Drawn	04/09	AdH	
a	06/10	added cable hole dimensions	Checked	07/11	AdH	
b	02/11	updated dimensions	Standards			
c	07/11	added bussbar tolerances	Approved	07/11	AdH	
			Scale	1 : 2	Title	HMD4-MG1, holder midiOTO, megaOTO
			Projection	Tolerance ± 1 mm unless otherwise noted	Drawing type	schematic
					Drawing number	HMD4-MG1 drawing 1
					Sheet	1 of 1
					Layers / Sheet	01 2 3 6 8 9 11 Sheet 01

