


PRODUCT SPECIFICATION


DATE: 03/21/00'

COSMO ELECTRONICS CORPORATION	SOLID STATE RELAY: KSD240AC8	NO. 58082240	REV.
		SHEET 1 OF 2	3

1. OUTSIDE DIMENSION : UNIT (mm)

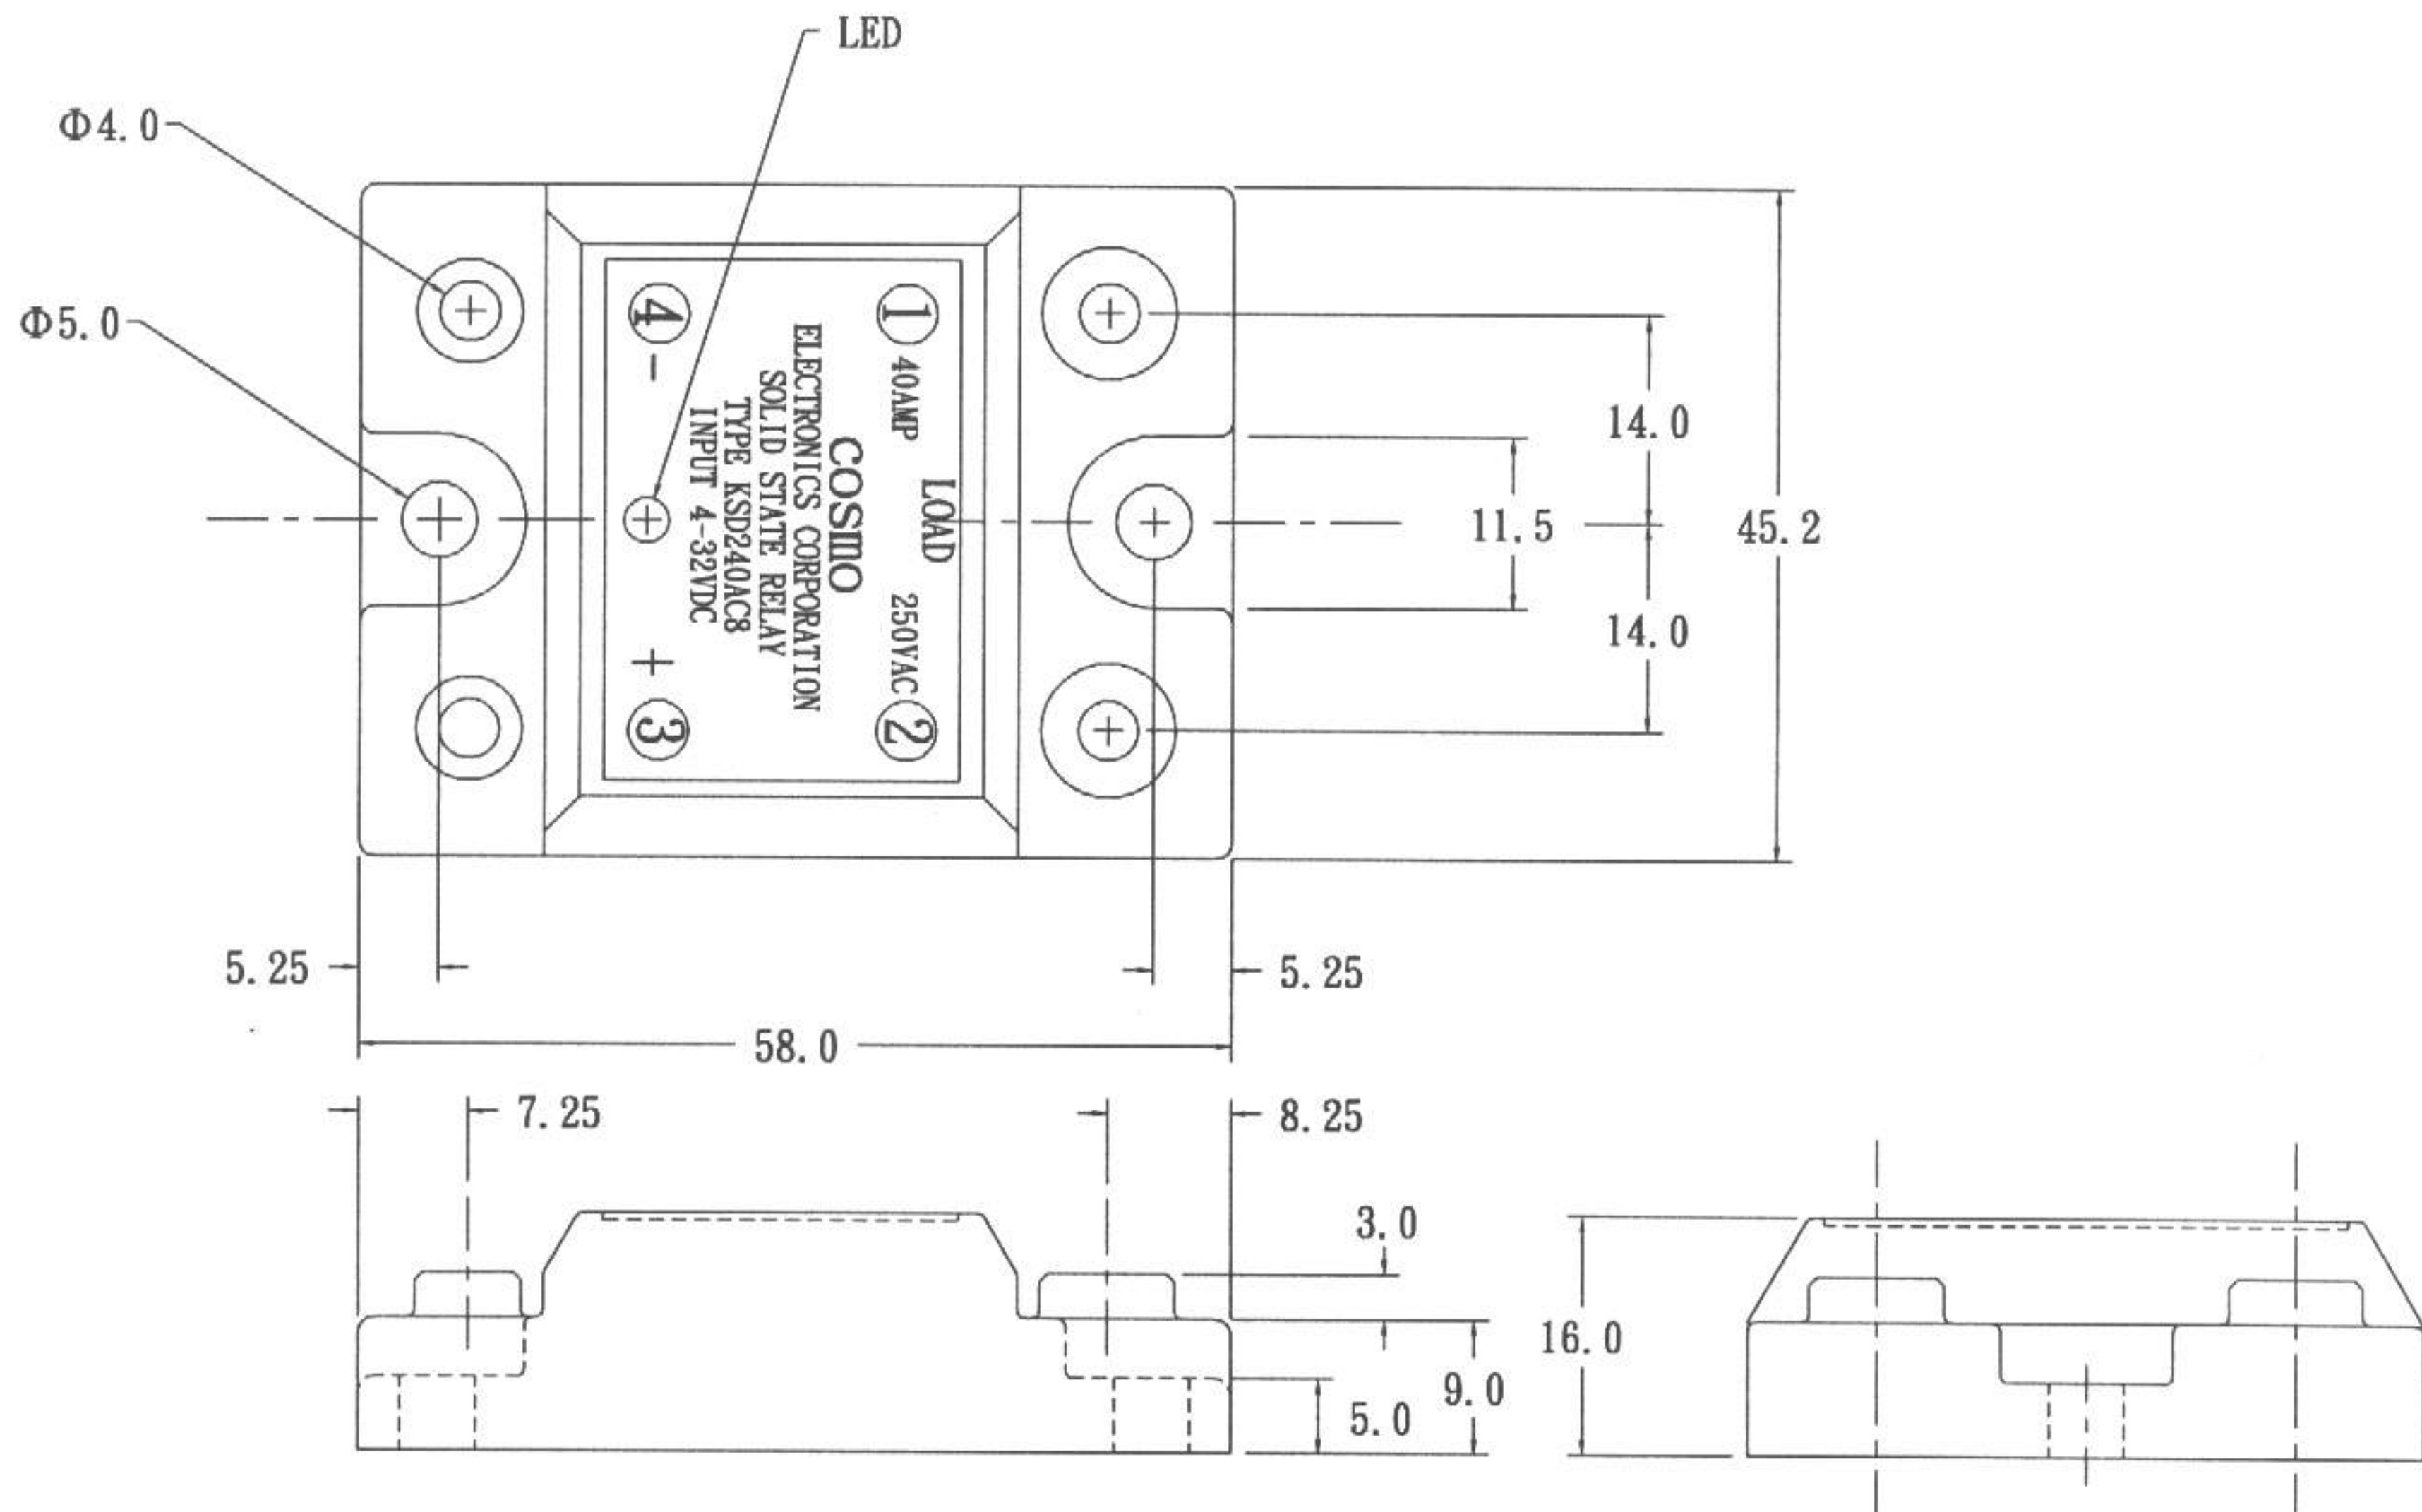

2. SCHEMATIC : TOP VIEW

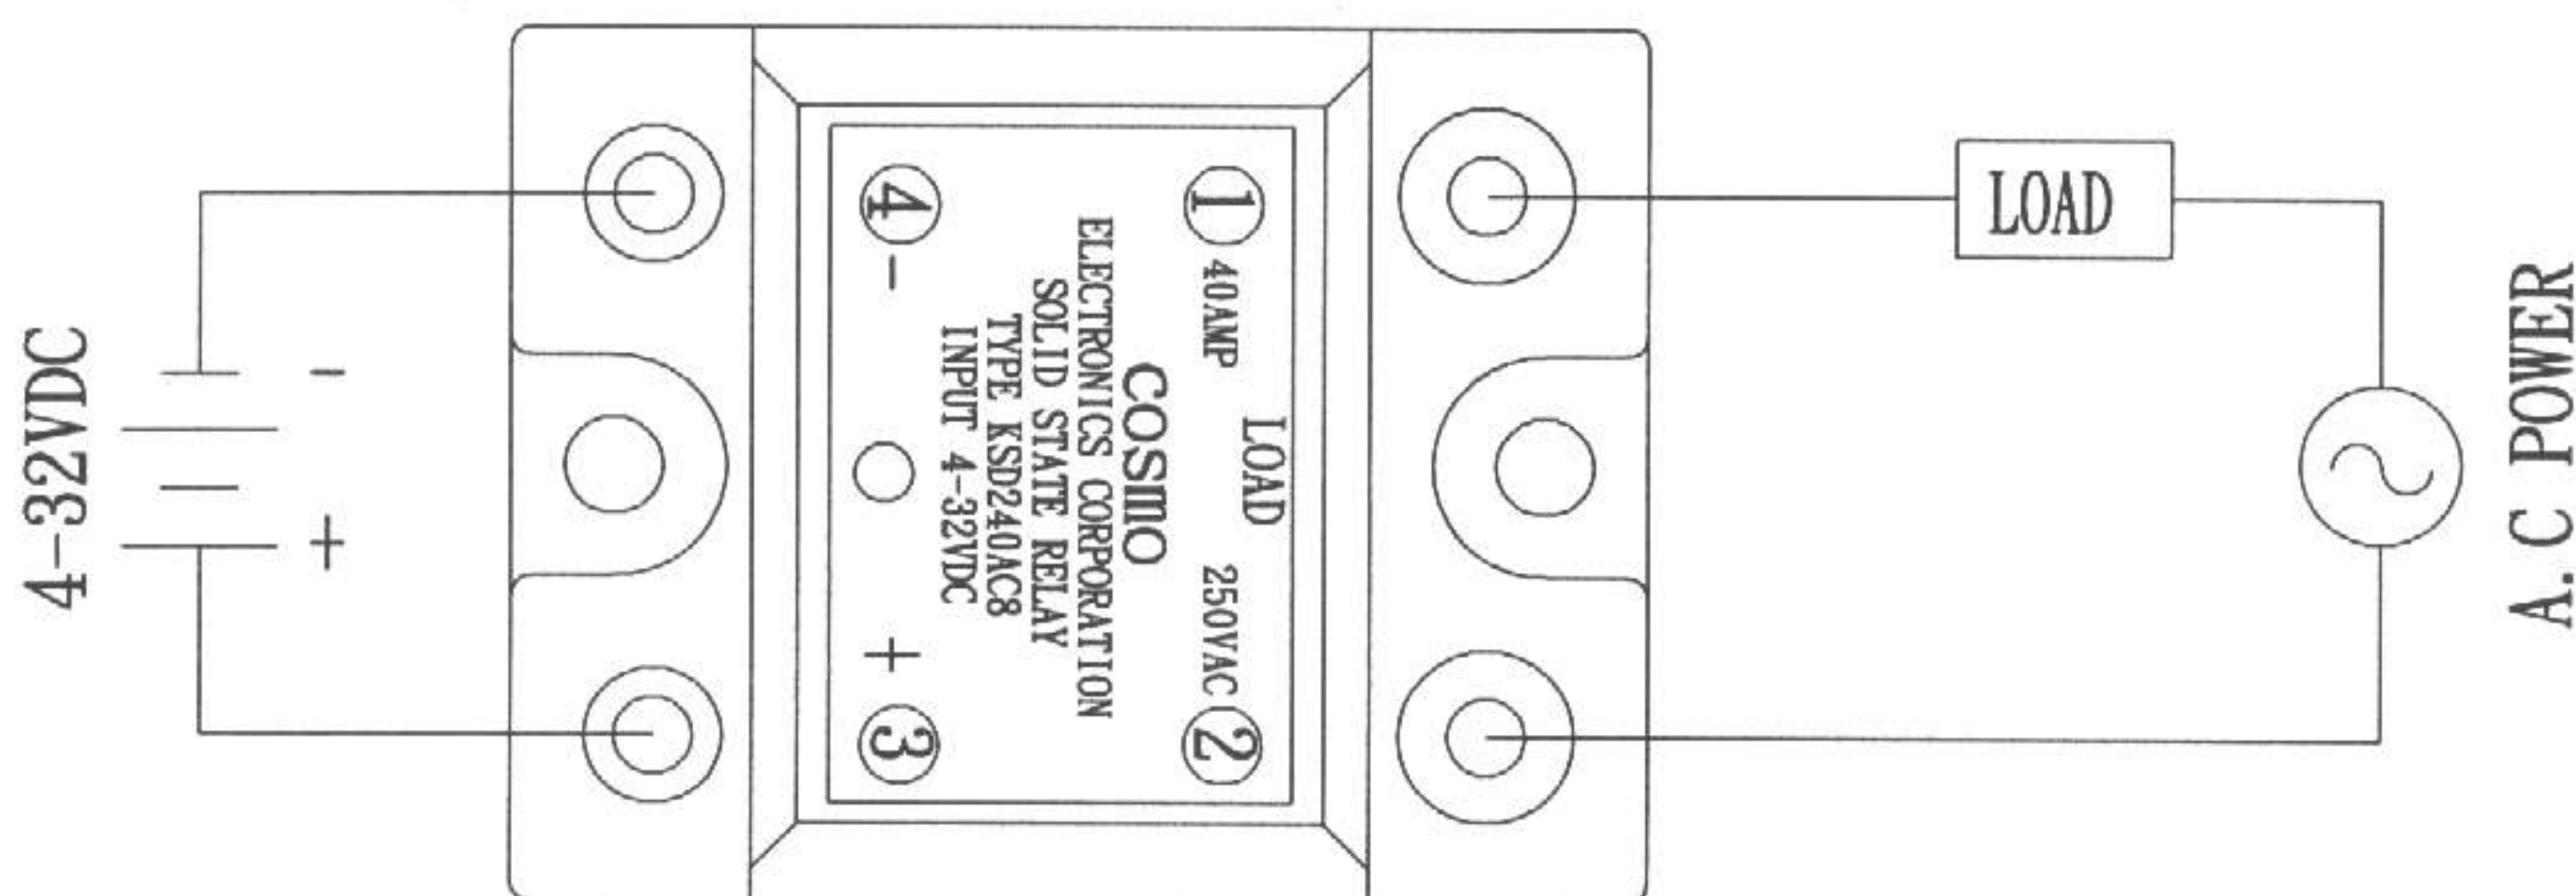

ISSUE <i>Michael Chen</i> 03-21-00	CHECK <i>Dean Yu</i> 03-21-00	APPROVED <i>Stan Pku 3-21-00</i>
--	-------------------------------------	-------------------------------------

PRODUCT SPECIFICATION

DATE: 03/21/00'

COSMO ELECTRONICS CORPORATION	SOLID STATE RELAY: KSD240AC8	NO. 58082240 SHEET 2 OF 2	REV. 3
---	--	------------------------------	-----------

3. Absolute Maximum Ratings

(Ta=25°C)

	Parameter	Symbol	Rating	Unit
Input	Input signal voltage	V _{IN}	4-32	VDC
	Drop-out voltage	V _{do}	1	VDC
Output	RMS on-state current	I _T	40	Arms
	Peak one cycle surge current (8.3ms)	I _{surge}	400	A
	Repetitive peak-off state voltage	V _{DRM}	600	V
	Operating frequency	f	47-70	Hz
	Critical rate of rise of on-state current	di/dt	50	A/us
	Load supply voltage	V _{out}	250	V _{rms} AC
	Isolation voltage input to output	V _{iso}	4000	V _{rms}
Operating temperature		T _{opr}	-30-100	°C
Storage temperature		T _{stg}	-30-125	°C
Soldering temperature 10sec		T _{sol}	300	°C

4. Electro-optical Characteristics

(Ta=25°C)

	Parameter	Symbol	Conditions	MIN	TYP	MAX	Unit
Input	Pick-up voltage	V _{pu}	I _{in} =1Arms			4	VDC
	Input current	I _{in}	V _{in} =4~32V	5		12	mA
Output	On-state voltage	V _T	I _T =1Arms			1.5	V _{rms}
	Operating current	I _{op}	V _{out} =240V _{rms}	50			mArms
	Leakage current	I _{leak}	V _{out} =240V _{rms}		3.5	7	mArms
	Critical rate of rise of off-state voltage	dv/dt		50	200		V/us
	Zero-cross voltage	V _{ox}	I _{in} =7mA			35	VAC
	Load Voltage Rating	V _{out}	I _T =50mArms MIN	50		280	VAC
Minimum trigger current		I _{FT}	V _{DRM} =600V			25	mA
Isolation resistance input to output		R _{ISO}	DC500V	10			GΩ
Turn-on time		T _{on}	60Hz AC			8.3	ms
Turn-off time		T _{off}	60Hz AC			8.3	ms
Thermal resistance (between junction and case)		R _{th} (j-c)1			1.3		°C/W

ISSUE <i>Michael Chen</i> 03-21-00	CHECK <i>Dean Yu</i> 03-21-00	APPROVED <i>Stam Hou</i> 3-21-00
--	-------------------------------------	--