



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDS-325-010 REV: 1.0

## 0.28" Single Digit Displays

MODEL NO : ELS-325SURWA/S530-A2 ECN : \_\_\_\_\_ Page: 1/5

### ■ Features :

- Industrial standard size.
- Low power consumption.
- Categorized for luminous intensity.

### ■ Applications:

- Audio equipment
- Instrument panels
- Digital readout display

### ■ Description :

- The ELS-325 series is a large 7.0mm (0.28")high seven segment display design for viewing distances up to 7 meters.
- These displays provide excellent reliability in bright ambient light .
- These device is made with white segments and gray surface.

PART NO	CHIP		C.C. or C.A.
	Material	Emitted Color	
ELS-325SURWA/S530-A2	AlGaInP	Hyper Red	C.C.

OFFICE : NO. 25,Lane 76,Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL : 886-2-2267-2000,2267-9936

FAX : 886-2-2267-6244,22676189,22676306

<http://www.everlight.com>




## 0.28" Single Digit Displays

MODEL NO : ELS-325SURWA/S530-A2

ECN : \_\_\_\_\_

Page: 2/5

### Package Dimension:

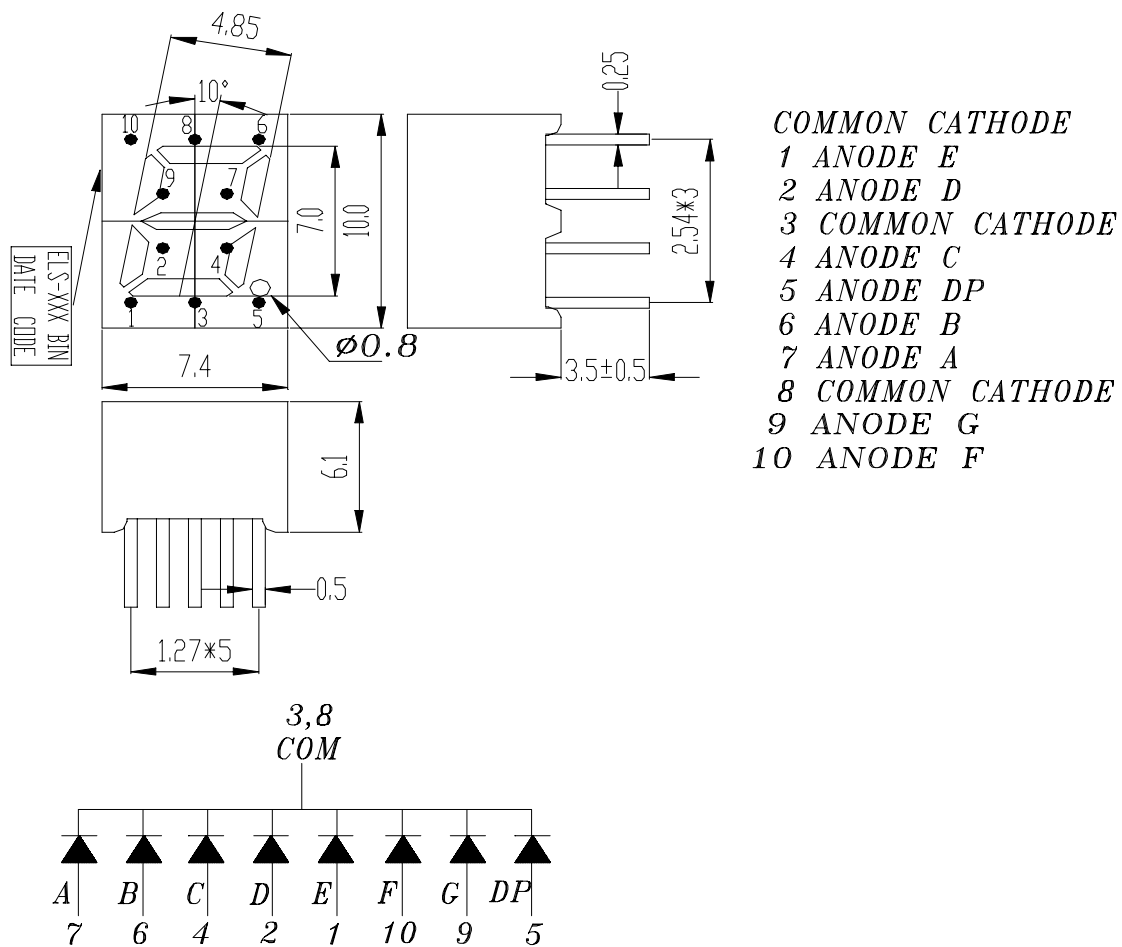

### NOTES:

- 1.All dimensions are millimeters , tolerance is 0.25mm unless otherwise noted.
- 2.Above specification may be changed without notice.  
Supplier will reserve authority on material change for above specification.



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDS-325-010 REV: 1.0

0.28" Single Digit Displays

MODEL NO : ELS-325SURWA/S530-A2 ECN : \_\_\_\_\_ Page: 3/5

## ■ Absolute maximum ratings at Ta = 25°C :

Parameter	Symbol	Rating	Unit
Reverse Voltage	V <sub>r</sub>	5	V
Forward Current	I <sub>f</sub>	25	mA
Operating Temperature	T <sub>opr</sub>	-40 to +85	°C
Storage Temperature	T <sub>stg</sub>	-40 to +100	°C
Soldering Temperature	T <sub>sol</sub>	260 ± 5	°C
Electrostatic Discharge	ESD	2000	V
Power Dissipation	P <sub>d</sub>	60	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	I <sub>f</sub> (Peak)	160	mA

## ■ Electronic optical characteristics :

Parameter		Symbol	MIN.	TYP.	MAX.	Unit	Condition
Luminous Intensity	Per segment	I <sub>v</sub>	0.45	1.3	----	mcd	I <sub>f</sub> =2mA
	Per decimal point		2.80	9.0	----	mcd	I <sub>f</sub> =10mA
			0.11	0.5	----	mcd	I <sub>f</sub> =2mA
			0.75	5.6	----	mcd	I <sub>f</sub> =10mA
Peak Wavelength		λ <sub>p</sub>	----	632	----	nm	I <sub>f</sub> =20mA
Dominant Wavelength		λ <sub>d</sub>	----	624	----	nm	I <sub>f</sub> =20mA
Spectrum Radiation Bandwidth		△λ	----	20	----	nm	I <sub>f</sub> =20mA
Forward Voltage		V <sub>f</sub>	----	2.0	2.4	V	I <sub>f</sub> =20mA
Reverse Current		I <sub>r</sub>	----	----	10	μA	V <sub>r</sub> =5V



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDS-325-010 REV: 1.0

0.28" Single Digit Displays

MODEL NO : ELS-325SURWA/S530-A2 ECN : \_\_\_\_\_ Page: 4/5

■ Reliability test item and condition:

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLE	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLE	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	If = 10 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 PCS	0/1

--	--	--	--	--	--



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number :

DDS-325-010

REV:

1.0

0.28" Single Digit Displays

MODEL NO: ELS-325SURWA/S530-A2

ECN :                     

Page:

5/5

## Typical Electro-Optical Characteristic Curves:

