



## Quad, Serial Input, 12-Bit, Voltage Output DIGITAL-TO-ANALOG CONVERTER

### FEATURES

- **LOW POWER:** 250mW (max)
- **UNIPOLAR OR BIPOLAR OPERATION**
- **SETTLING TIME:** 10 $\mu$ s to 0.012%
- **12-BIT LINEARITY AND MONOTONICITY:**  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- **DOUBLE-BUFFERED DATA INPUTS**
- **SMALL SO-16 PACKAGE**


### APPLICATIONS

- **PROCESS CONTROL**
- **ATE PIN ELECTRONICS**
- **CLOSED-LOOP SERVO-CONTROL**
- **MOTOR CONTROL**
- **DATA ACQUISITION SYSTEMS**
- **DAC-PER-PIN PROGRAMMERS**

### DESCRIPTION

The DAC7715 is a quad, serial input, 12-bit, voltage output Digital-to-Analog Converter (DAC) with guaranteed 12-bit monotonic performance over the  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  temperature range. An asynchronous reset clears all registers to either mid-scale ( $800_{\text{H}}$ ) or zero-scale ( $000_{\text{H}}$ ), selectable via the RESETSEL pin. The individual DAC inputs are double buffered to allow for simultaneous update of all DAC outputs. The device can be powered from a single  $+15\text{V}$  supply or from dual  $+15\text{V}$  and  $-15\text{V}$  supplies.

Low power and small size makes the DAC7715 ideal for automatic test equipment, DAC-per-pin programmers, data acquisition systems, and closed-loop servo-control. The device is available in a SO-16 package and is guaranteed over the  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  temperature range.

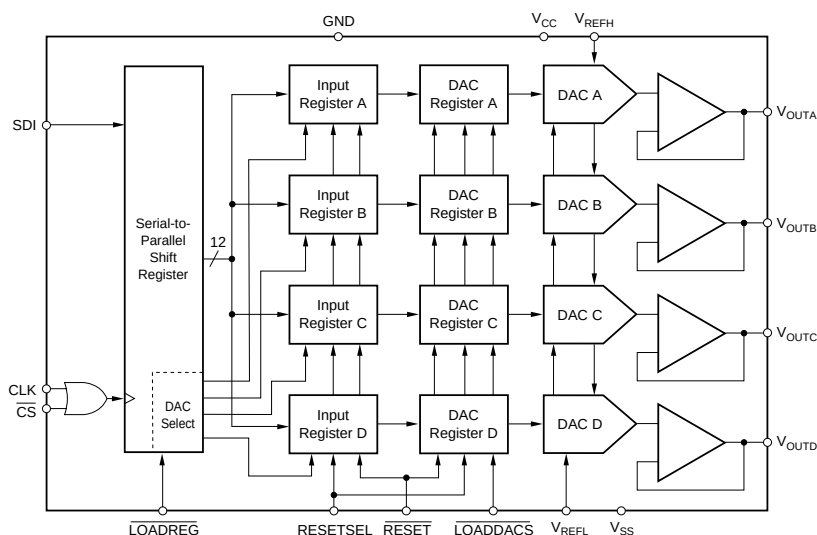

International Airport Industrial Park • Mailing Address: PO Box 11400, Tucson, AZ 85734 • Street Address: 6730 S. Tucson Blvd., Tucson, AZ 85706 • Tel: (520) 746-1111

Twx: 910-952-1111 • Cable: BBRCORP • Telex: 066-6491 • FAX: (520) 889-1510 • Immediate Product Info: (800) 548-6132

<http://www.burr-brown.com/>  <http://www.ti.com/>

# SPECIFICATIONS (Dual Supply)

At  $T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ ,  $V_{CC} = +15\text{V}$ ,  $V_{SS} = -15\text{V}$ ,  $V_{REFH} = +10\text{V}$ ,  $V_{REFL} = -10\text{V}$ , unless otherwise noted.

| PARAMETER                          | CONDITIONS                                                                      | DAC7715U                 |                               |                                | DAC7715UB |     |         | UNITS                        |
|------------------------------------|---------------------------------------------------------------------------------|--------------------------|-------------------------------|--------------------------------|-----------|-----|---------|------------------------------|
|                                    |                                                                                 | MIN                      | TYP                           | MAX                            | MIN       | TYP | MAX     |                              |
| <b>ACCURACY</b>                    |                                                                                 |                          |                               |                                |           |     |         |                              |
| Linearity Error                    | $T_{MIN}$ to $T_{MAX}$<br>Code = 000 <sub>H</sub>                               | 12                       | 1                             | $\pm 2$                        | *         | *   | $\pm 1$ | LSB <sup>(1)</sup>           |
| Linearity Matching <sup>(2)</sup>  |                                                                                 |                          |                               | $\pm 2$                        |           |     | $\pm 1$ | LSB                          |
| Differential Linearity Error       |                                                                                 |                          |                               | $\pm 1$                        |           |     | $\pm 1$ | LSB                          |
| Monotonicity                       |                                                                                 |                          |                               |                                |           |     |         | Bits                         |
| Zero-Scale Error                   |                                                                                 |                          |                               | $\pm 2$                        |           |     | *       | LSB                          |
| Zero-Scale Drift                   | Code = FFF <sub>H</sub>                                                         |                          |                               | $\pm 2$                        |           | *   | $\pm 1$ | ppm/ $^{\circ}\text{C}$      |
| Zero-Scale Matching <sup>(2)</sup> |                                                                                 |                          |                               | $\pm 2$                        |           |     | *       | LSB                          |
| Full-Scale Error                   | At Full Scale                                                                   |                          | 10                            | $\pm 2$                        |           | *   | $\pm 1$ | LSB                          |
| Full-Scale Matching <sup>(2)</sup> |                                                                                 |                          |                               | $\pm 2$                        |           |     | $\pm 1$ | LSB                          |
| Power Supply Sensitivity           |                                                                                 |                          |                               |                                |           |     |         | ppm/V                        |
| <b>ANALOG OUTPUT</b>               |                                                                                 |                          |                               |                                |           |     |         |                              |
| Voltage Output <sup>(3)</sup>      | No Oscillation<br><br>To $V_{SS}$ , $V_{CC}$ , or GND                           | $V_{REFL}$<br>-5         | 500<br>$\pm 20$<br>Indefinite | $V_{REFH}$<br>+5               | *         | *   | *       | V                            |
| Output Current                     |                                                                                 |                          |                               |                                |           |     |         | mA                           |
| Load Capacitance                   |                                                                                 |                          |                               |                                |           |     |         | pF                           |
| Short-Circuit Current              |                                                                                 |                          |                               |                                |           |     |         | mA                           |
| Short-Circuit Duration             |                                                                                 |                          |                               |                                |           |     |         |                              |
| <b>REFERENCE INPUT</b>             |                                                                                 |                          |                               |                                |           |     |         |                              |
| $V_{REFH}$ Input Range             |                                                                                 | $V_{REFL} + 1.25$<br>-10 |                               | +10<br>$V_{REFH} - 1.25$       | *         | *   | *       | V                            |
| $V_{REFL}$ Input Range             |                                                                                 |                          |                               |                                |           |     |         | V                            |
| Ref High Input Current             |                                                                                 |                          |                               |                                |           |     |         | mA                           |
| Ref Low Input Current              |                                                                                 |                          |                               |                                |           |     |         | mA                           |
| <b>DYNAMIC PERFORMANCE</b>         |                                                                                 |                          |                               |                                |           |     |         |                              |
| Settling Time                      | To $\pm 0.012\%$ , 20V Output Step<br>Full-Scale Step<br><br>$f = 10\text{kHz}$ |                          | 8<br>0.25<br>2<br>65          | 10                             |           | *   | *       | $\mu\text{s}$                |
| Channel-to-Channel Crosstalk       |                                                                                 |                          |                               |                                |           |     |         | LSB                          |
| Digital Feedthrough                |                                                                                 |                          |                               |                                |           |     |         | nV-s                         |
| Output Noise Voltage               |                                                                                 |                          |                               |                                |           |     |         | $\text{nV}/\sqrt{\text{Hz}}$ |
| <b>DIGITAL INPUT</b>               |                                                                                 |                          |                               |                                |           |     |         |                              |
| Logic Levels                       | $I_{IH} \leq \pm 10\mu\text{A}$<br>$I_{IL} \leq \pm 10\mu\text{A}$              | 3.325                    |                               | 1.575                          | *         |     | *       | V                            |
| $V_{IH}$                           |                                                                                 |                          |                               |                                |           |     |         | V                            |
| $V_{IL}$                           |                                                                                 |                          |                               |                                |           |     |         |                              |
| Data Format                        |                                                                                 |                          |                               |                                |           |     |         |                              |
| <b>POWER SUPPLY REQUIREMENTS</b>   |                                                                                 |                          |                               |                                |           |     |         |                              |
| $V_{CC}$                           |                                                                                 | +14.25<br>-15.75         | 6<br>-6<br>180                | +15.75<br>-14.25<br>8.5<br>250 | *         | *   | *       | V                            |
| $V_{SS}$                           |                                                                                 |                          |                               |                                |           |     |         | V                            |
| $I_{CC}$                           |                                                                                 |                          |                               |                                |           |     |         | mA                           |
| $I_{SS}$                           |                                                                                 |                          |                               |                                |           |     |         | mA                           |
| Power Dissipation                  |                                                                                 |                          |                               |                                |           |     |         | mW                           |
| <b>TEMPERATURE RANGE</b>           |                                                                                 |                          |                               |                                |           |     |         |                              |
| Specified Performance              |                                                                                 | -40                      |                               | +85                            | *         |     | *       | $^{\circ}\text{C}$           |

NOTES: (1) LSB means Least Significant Bit; if  $V_{REFH}$  equals +10V and  $V_{REFL}$  equals -10V, then one LSB equals 4.88mV. (2) All DAC outputs will match within the specified error band. (3) Ideal output voltage does not take into account zero or full-scale error.

The information provided herein is believed to be reliable; however, BURR-BROWN assumes no responsibility for inaccuracies or omissions. BURR-BROWN assumes no responsibility for the use of this information, and all use of such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. BURR-BROWN does not authorize or warrant any BURR-BROWN product for use in life support devices and/or systems.

# SPECIFICATIONS (Single Supply)

At  $T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ ,  $V_{CC} = +15\text{V}$ ,  $V_{SS} = \text{GND}$ ,  $V_{REFH} = +10\text{V}$ ,  $V_{REFL} = 0\text{V}$ , unless otherwise noted.

|                                    |                                                                 | DAC7715U                |                          |                          | DAC7715UB |     |     |                    |   |   |
|------------------------------------|-----------------------------------------------------------------|-------------------------|--------------------------|--------------------------|-----------|-----|-----|--------------------|---|---|
| PARAMETER                          | CONDITIONS                                                      | MIN                     | TYP                      | MAX                      | MIN       | TYP | MAX | UNITS              |   |   |
| ACCURACY                           |                                                                 |                         |                          |                          |           |     |     |                    |   |   |
| Linearity Error <sup>(1)</sup>     | T <sub>MIN</sub> to T <sub>MAX</sub><br>Code = 004 <sub>H</sub> | 12                      | 2                        | ±2                       | *         | *   | ±1  | LSB <sup>(2)</sup> |   |   |
| Linearity Matching <sup>(3)</sup>  |                                                                 |                         |                          | ±2                       |           |     | ±1  | LSB                |   |   |
| Differential Linearity Error       |                                                                 |                         |                          | ±1                       |           |     | ±1  | LSB                |   |   |
| Monotonicity                       |                                                                 |                         |                          |                          |           |     |     | Bits               |   |   |
| Zero-Scale Error                   |                                                                 |                         |                          | ±4                       |           |     | *   | LSB                |   |   |
| Zero-Scale Drift                   | Code = FFF <sub>H</sub>                                         |                         | 20                       | ±4                       |           | *   | ±2  | ppm/°C             |   |   |
| Zero-Scale Matching <sup>(3)</sup> |                                                                 |                         |                          | ±4                       |           |     | *   | LSB                |   |   |
| Full-Scale Error                   |                                                                 |                         |                          | ±4                       |           |     | *   | LSB                |   |   |
| Full-Scale Matching <sup>(3)</sup> | At Full Scale                                                   |                         |                          |                          |           | *   | ±2  | LSB                |   |   |
| Power Supply Sensitivity           |                                                                 |                         |                          |                          |           |     |     | ppm/V              |   |   |
| ANALOG OUTPUT                      |                                                                 |                         |                          |                          |           |     |     |                    |   |   |
| Voltage Output <sup>(4)</sup>      | No Oscillation<br><br>To V <sub>CC</sub> or GND                 | V <sub>REFL</sub><br>−5 | 500<br>±20<br>Indefinite | V <sub>REFH</sub><br>+5  | *         | *   | *   | V                  |   |   |
| Output Current                     |                                                                 |                         |                          |                          |           |     |     | mA                 |   |   |
| Load Capacitance                   |                                                                 |                         |                          |                          |           |     |     | pF                 |   |   |
| Short-Circuit Current              |                                                                 |                         |                          |                          |           |     |     | mA                 |   |   |
| Short-Circuit Duration             |                                                                 |                         |                          |                          |           |     |     |                    |   |   |
| REFERENCE INPUT                    |                                                                 |                         |                          |                          |           |     |     |                    |   |   |
| V <sub>REFH</sub> Input Range      |                                                                 | V <sub>REFL</sub> +1.25 |                          | +10                      | *         |     | *   | V                  |   |   |
| V <sub>REFL</sub> Input Range      |                                                                 | 0                       |                          | V <sub>REFH</sub> − 1.25 |           |     | *   | V                  |   |   |
| Ref High Input Current             |                                                                 | −0.3                    |                          | 1.5                      |           |     | *   | mA                 |   |   |
| Ref Low Input Current              |                                                                 | −2.0                    |                          | 0                        |           |     | *   | mA                 |   |   |
| DYNAMIC PERFORMANCE                |                                                                 |                         |                          |                          |           |     |     |                    |   |   |
| Settling Time <sup>(5)</sup>       | To ±0.012%, 10V Output Step                                     |                         | 8                        | 10                       |           | *   | *   | μs                 |   |   |
| Channel-to-Channel Crosstalk       |                                                                 |                         | 0.25                     |                          |           | *   | *   | LSB                |   |   |
| Digital Feedthrough                | f = 10kHz                                                       |                         | 2                        |                          |           |     | *   | nV-s               |   |   |
| Output Noise Voltage               |                                                                 |                         | 65                       |                          |           |     | *   | nV/√Hz             |   |   |
| DIGITAL INPUT                      |                                                                 |                         |                          |                          |           |     |     |                    |   |   |
| Logic Levels                       | I <sub>IH</sub> ≤ ±10μA<br>I <sub>IL</sub> ≤ ±10μA              | 3.325                   |                          | 1.575                    | *         |     | *   | V                  |   |   |
| V <sub>IH</sub>                    |                                                                 |                         |                          |                          |           |     |     |                    | V |   |
| V <sub>IL</sub>                    |                                                                 |                         |                          |                          |           |     |     |                    | V |   |
| Data Format                        |                                                                 | Straight Binary         |                          |                          |           | *   |     |                    |   |   |
| POWER SUPPLY REQUIREMENTS          |                                                                 |                         |                          |                          |           |     |     |                    |   |   |
| V <sub>CC</sub>                    |                                                                 | 14.25                   | 3.0                      | 15.75                    | *         |     | *   | V                  |   |   |
| I <sub>CC</sub>                    |                                                                 |                         |                          |                          |           |     |     | 45                 | * | * |
| Power Dissipation                  |                                                                 |                         |                          |                          |           |     |     |                    |   | * |
| TEMPERATURE RANGE                  |                                                                 |                         |                          |                          |           |     |     |                    |   |   |
| Specified Performance              |                                                                 | −40                     |                          | +85                      | *         |     | *   | °C                 |   |   |

NOTES: (1) If  $V_{SS} = 0\text{V}$ , specification applies at code 004<sub>H</sub> and above. (2) LSB means Least Significant Bit; if  $V_{\text{REFH}}$  equals +10V and  $V_{\text{REFL}}$  equals 0V, then one LSB equals 2.44mV. (3) All DAC outputs will match within the specified error band. (4) Ideal output voltage does not take into account zero or full-scale error. (5) Full-scale positive 10V step and negative step from code FFF<sub>H</sub> to 020<sub>H</sub>.

## ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

|                                             |                 |
|---------------------------------------------|-----------------|
| $V_{CC}$ to $V_{SS}$ .....                  | -0.3V to +32V   |
| $V_{CC}$ to GND .....                       | -0.3V to +16V   |
| $V_{SS}$ to GND .....                       | +0.3V to -16V   |
| $V_{REFH}$ to GND .....                     | -9V to +11V     |
| $V_{REFL}$ to GND ( $V_{SS} = -15V$ ) ..... | -11V to +9V     |
| $V_{REFL}$ to GND ( $V_{SS} = 0V$ ) .....   | -0.3V to +9V    |
| $V_{REFH}$ to $V_{REFL}$ .....              | -1V to +22V     |
| Digital Input Voltage to GND .....          | -0.3V to 5.8V   |
| Digital Output Voltage to GND .....         | -0.3V to 5.8V   |
| Maximum Junction Temperature .....          | +150°C          |
| Operating Temperature Range .....           | -40°C to +85°C  |
| Storage Temperature Range .....             | -65°C to +150°C |
| Lead Temperature (soldering, 10s) .....     | +300°C          |

NOTE: (1) Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. Exposure to absolute maximum conditions for extended periods may affect device reliability.



## ELECTROSTATIC DISCHARGE SENSITIVITY

This integrated circuit can be damaged by ESD. Burr-Brown recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.


ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

## PACKAGE/ORDERING INFORMATION


| PRODUCT   | MAXIMUM LINEARITY ERROR (LSB) | MAXIMUM DIFFERENTIAL LINEARITY (LSB) | PACKAGE | PACKAGE DRAWING NUMBER | SPECIFICATION TEMPERATURE RANGE | ORDERING NUMBER <sup>(1)</sup> | TRANSPORT MEDIA |
|-----------|-------------------------------|--------------------------------------|---------|------------------------|---------------------------------|--------------------------------|-----------------|
| DAC7715U  | ±2                            | ±1                                   | SOIC-16 | 211                    | -40°C to +85°C                  | DAC7715U                       | Rails           |
| "         | "                             | "                                    | "       | "                      | "                               | DAC7715U/1K                    | Tape and Reel   |
| DAC7715UB | ±1                            | ±1                                   | SOIC-16 | 211                    | -40°C to +85°C                  | DAC7715UB                      | Rails           |
| "         | "                             | "                                    | "       | "                      | "                               | DAC7715UB/1K                   | Tape and Reel   |

NOTE: (1) Models with a slash (/) are available only in Tape and Reel in the quantities indicated (e.g., /1K indicates 1000 devices per reel). Ordering 1000 pieces of "DAC7715UB/1K" will get a single 1000-piece Tape and Reel.

## ESD PROTECTION CIRCUITS

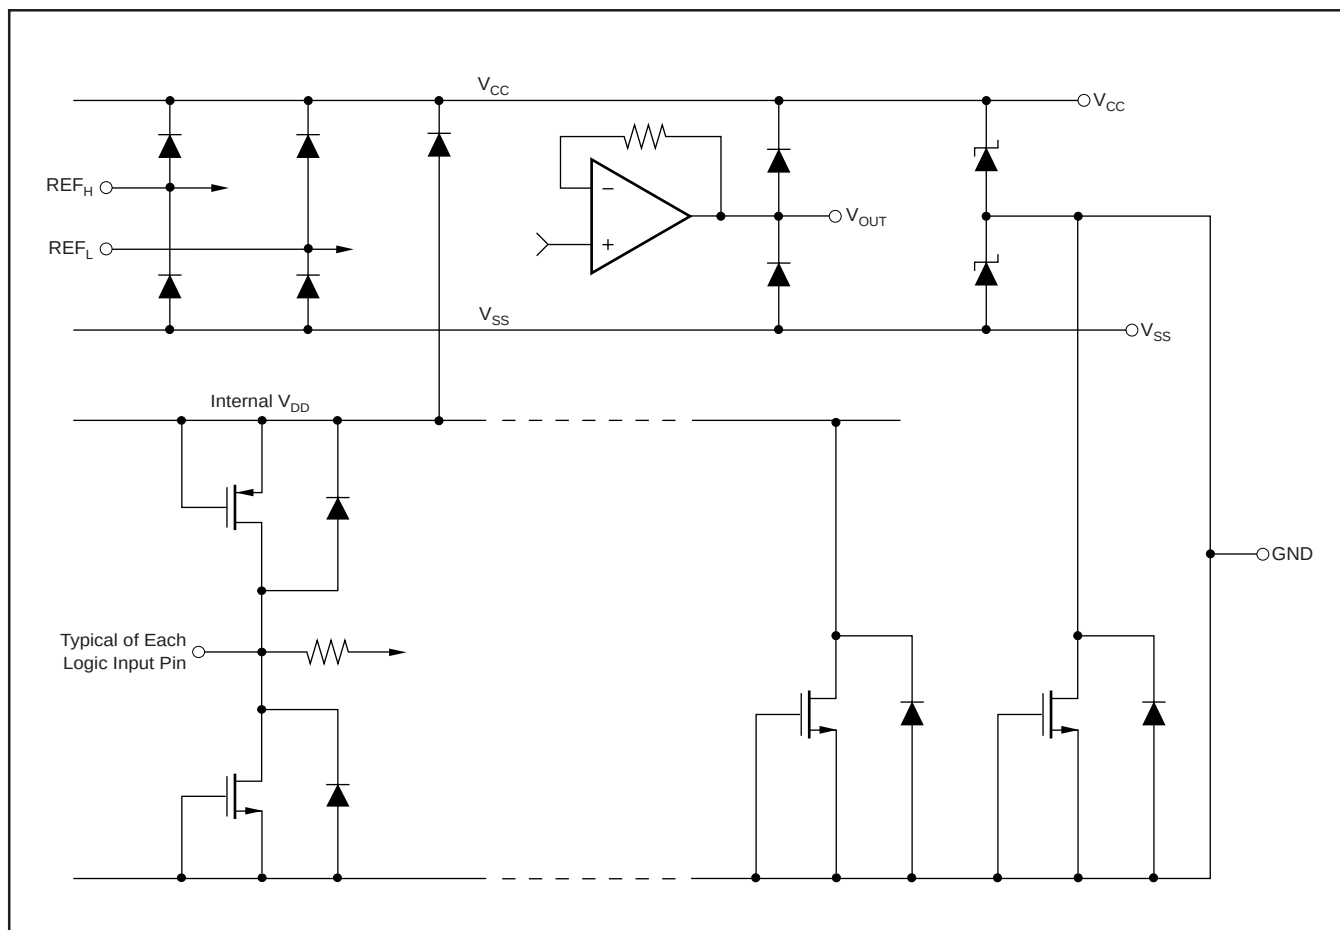

## PIN CONFIGURATION—U Package

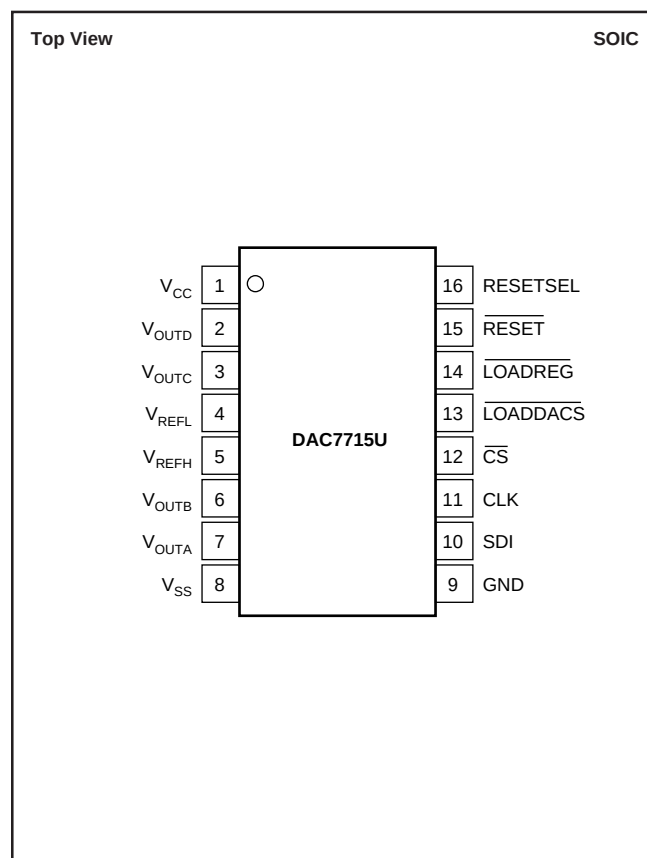


## PIN DESCRIPTIONS—U Package

| PIN | LABEL                 | DESCRIPTION                                                                                                                                                                                                            |
|-----|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | $V_{CC}$              | Positive Supply Voltage, +15V nominal.                                                                                                                                                                                 |
| 2   | $V_{OUTD}$            | DAC D Voltage Output                                                                                                                                                                                                   |
| 3   | $V_{OUTC}$            | DAC C Voltage Output                                                                                                                                                                                                   |
| 4   | $V_{REFL}$            | Reference Input Voltage Low. Sets minimum output voltage for all DACs.                                                                                                                                                 |
| 5   | $V_{REFH}$            | Reference Input Voltage High. Sets maximum output voltage for all DACs.                                                                                                                                                |
| 6   | $V_{OUTB}$            | DAC B Voltage Output                                                                                                                                                                                                   |
| 7   | $V_{OUTA}$            | DAC A Voltage Output                                                                                                                                                                                                   |
| 8   | $V_{SS}$              | Negative Supply Voltage, 0V or –15V nominal.                                                                                                                                                                           |
| 9   | GND                   | Ground                                                                                                                                                                                                                 |
| 10  | SDI                   | Serial Data Input                                                                                                                                                                                                      |
| 11  | CLK                   | Serial Data Clock                                                                                                                                                                                                      |
| 12  | $\overline{CS}$       | Chip Select Input                                                                                                                                                                                                      |
| 13  | $\overline{LOADDACS}$ | All DAC registers become transparent when $\overline{LOADDACS}$ is LOW. They are in the latched state when $\overline{LOADDACS}$ is HIGH.                                                                              |
| 14  | $\overline{LOADREG}$  | The selected input register becomes transparent when $\overline{LOADREG}$ is LOW. It is in the latched state when $\overline{LOADREG}$ is HIGH.                                                                        |
| 15  | $\overline{RESET}$    | Asynchronous Reset Input. Sets DAC and input registers to either zero-scale (000 <sub>H</sub> ) or mid-scale (800 <sub>H</sub> ) when LOW. RESETSEL determines which code is active.                                   |
| 16  | RESETSEL              | When LOW, a LOW on $\overline{RESET}$ will cause the DAC and input registers to be set to code 000 <sub>H</sub> . When RESETSEL is HIGH, a LOW on $\overline{RESET}$ will set the registers to code 800 <sub>H</sub> . |


# TYPICAL PERFORMANCE CURVES: $V_{SS} = 0V$

At  $T_A = +25^\circ C$ ,  $V_{CC} = +15V$ ,  $V_{SS} = 0V$ ,  $V_{REFH} = +10V$ ,  $V_{REFL} = 0V$ , representative unit, unless otherwise specified.


LINEARITY ERROR AND  
DIFFERENTIAL LINEARITY ERROR vs CODE  
**Single Channel 25°C**  
(Typical of Each Output Channel)

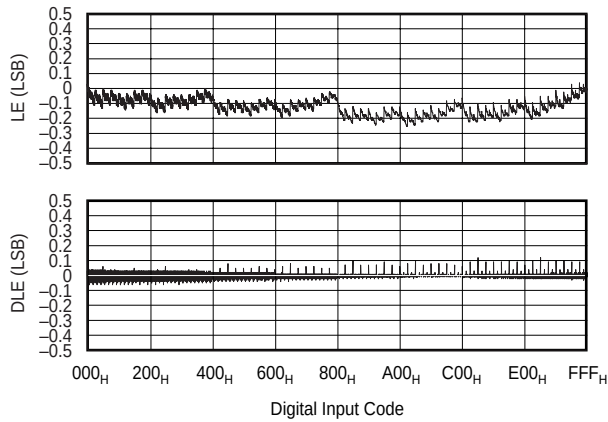


LINEARITY ERROR AND  
DIFFERENTIAL LINEARITY ERROR vs CODE  
**Single Channel 85°C**  
(Typical of Each Output Channel)

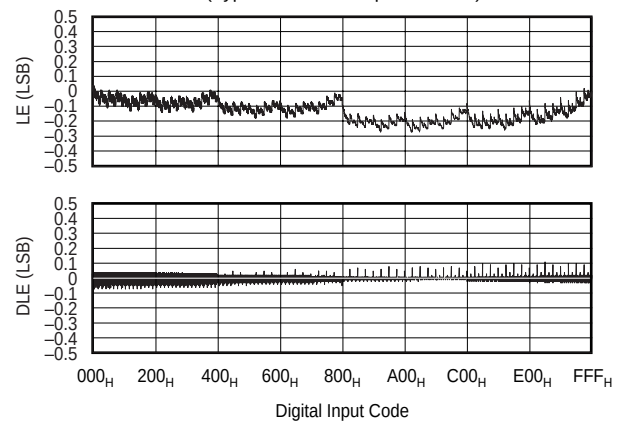


LINEARITY ERROR AND  
DIFFERENTIAL LINEARITY ERROR vs CODE  
**Single Channel -40°C**  
(Typical of Each Output Channel)

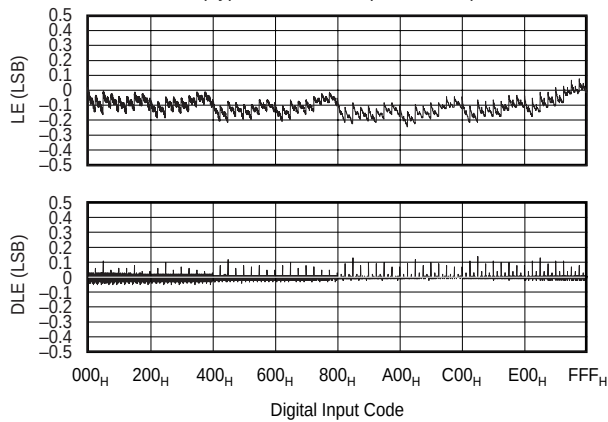


ZERO-SCALE ERROR vs TEMPERATURE  
(Code 004<sub>H</sub>)

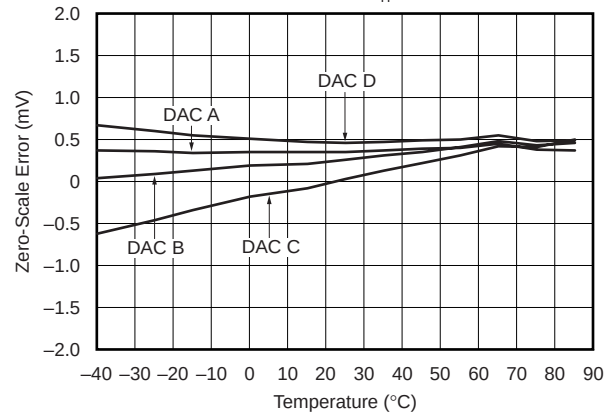

FULL-SCALE ERROR vs TEMPERATURE  
(Code FFF<sub>H</sub>)






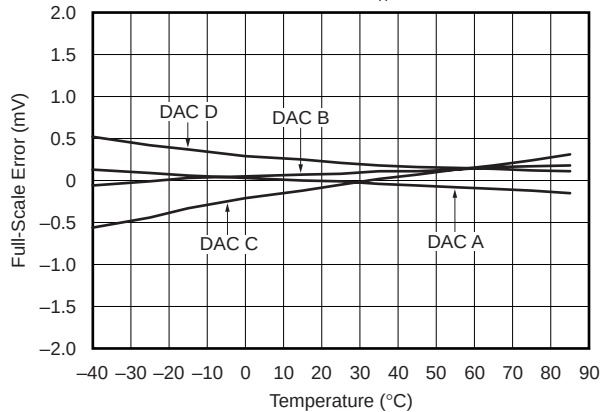


CURRENT vs CODE  
All DACs Set to Indicated Code

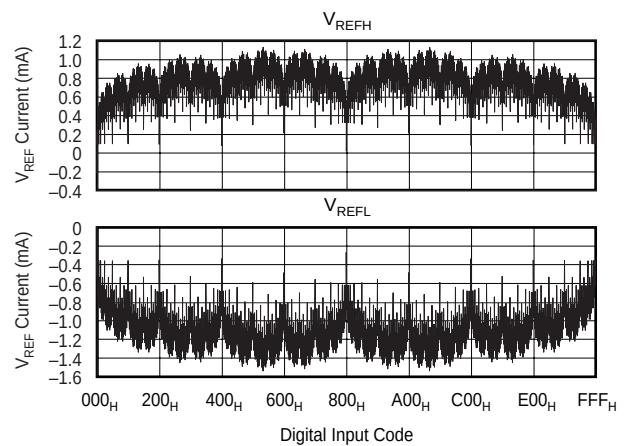





# TYPICAL PERFORMANCE CURVES: $V_{SS} = 0V$ (Cont.)

At  $T_A = +25^\circ C$ ,  $V_{CC} = +15V$ ,  $V_{SS} = 0V$ ,  $V_{REFH} = +10V$ ,  $V_{REFL} = 0V$ , representative unit, unless otherwise specified.

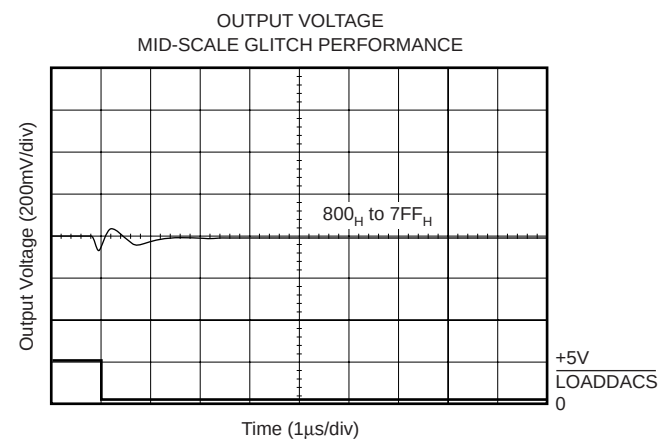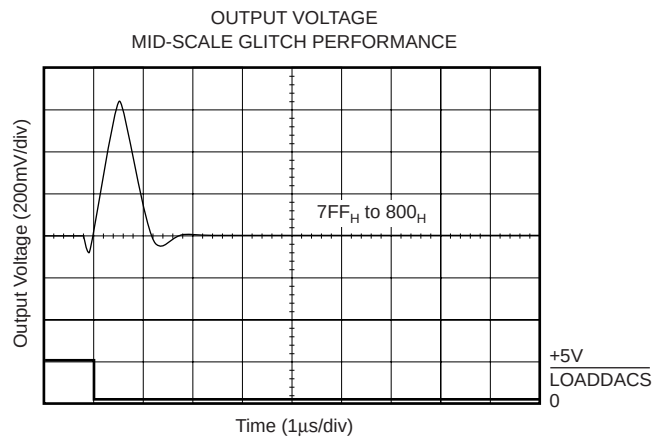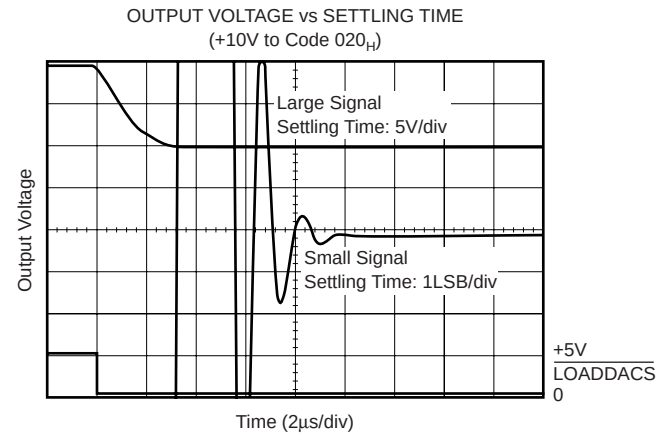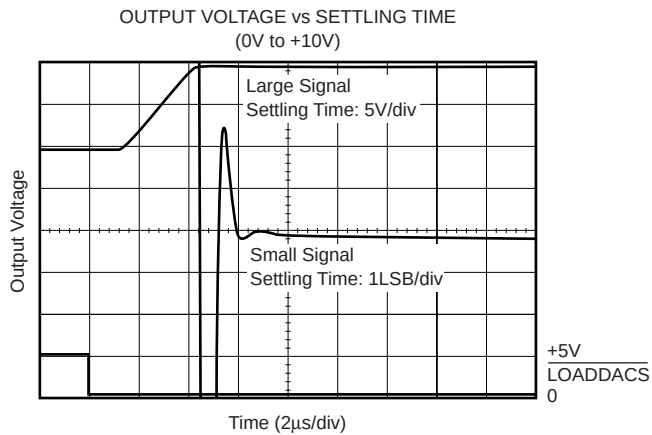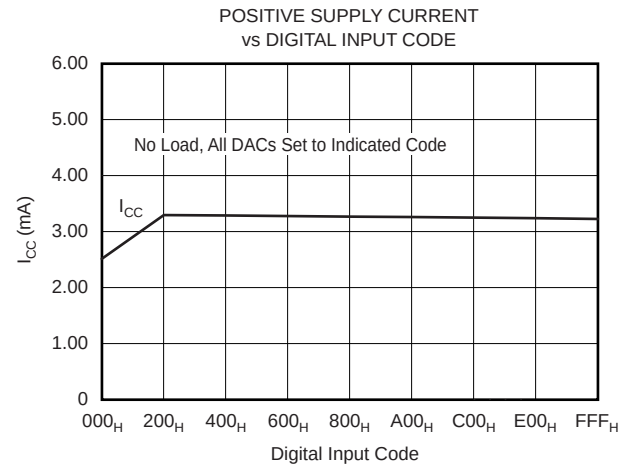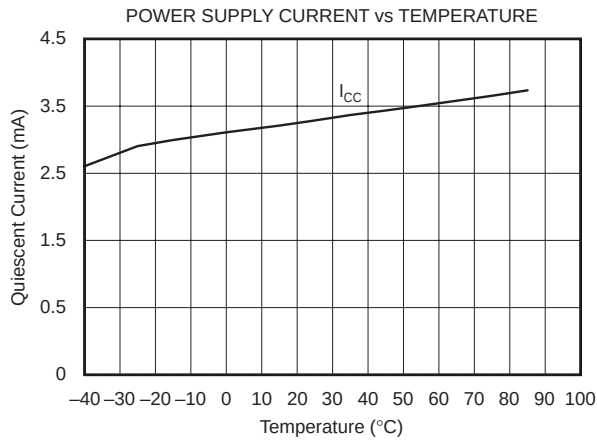

# TYPICAL PERFORMANCE CURVES: $V_{SS} = 0V$ (Cont.)







At  $T_A = +25^\circ C$ ,  $V_{CC} = +15V$ ,  $V_{SS} = 0V$ ,  $V_{REFH} = +10V$ ,  $V_{REFL} = 0V$ , representative unit, unless otherwise specified.

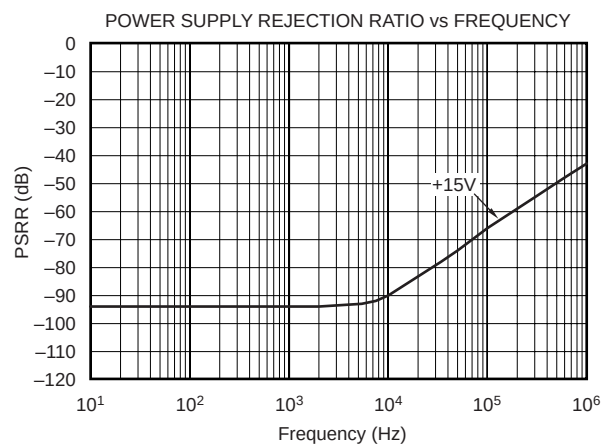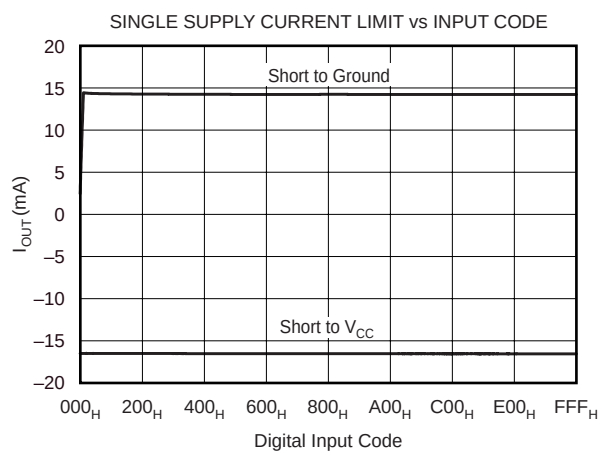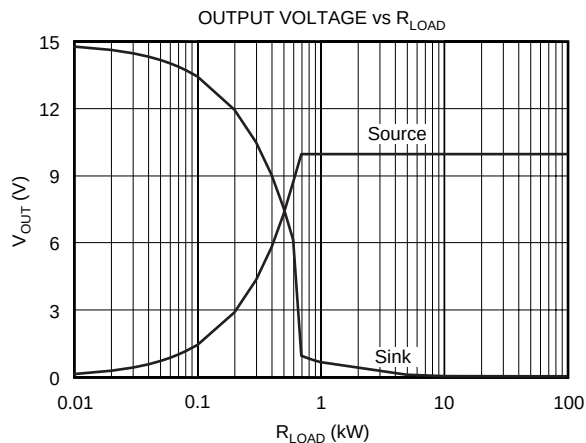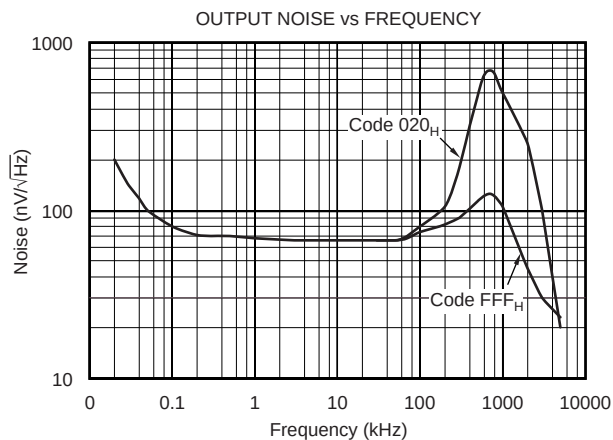









# TYPICAL PERFORMANCE CURVES: $V_{SS} = -15V$

At  $T_A = +25^\circ C$ ,  $V_{CC} = +15V$ ,  $V_{SS} = 0V$ ,  $V_{REFH} = +10V$ ,  $V_{REFL} = 0V$ , representative unit, unless otherwise specified.

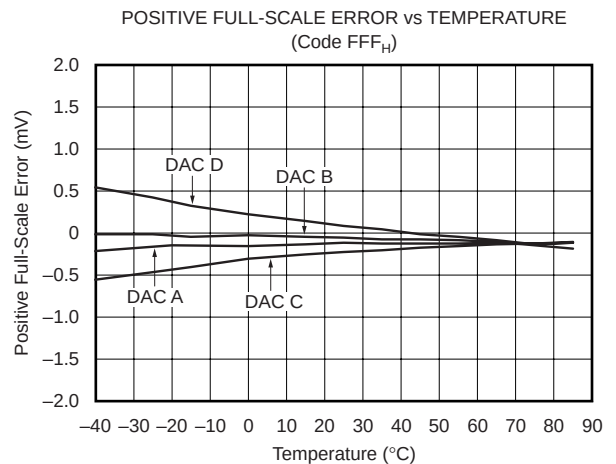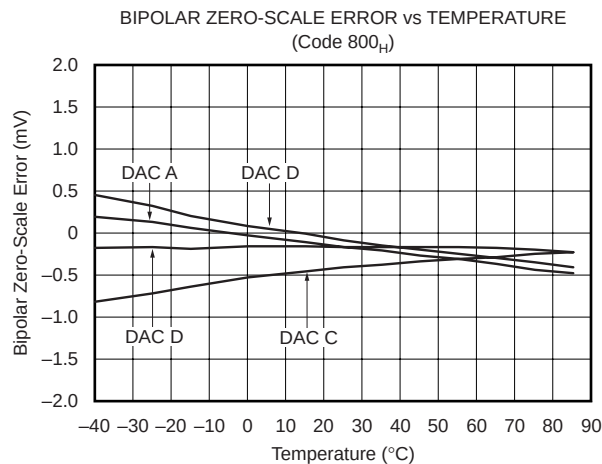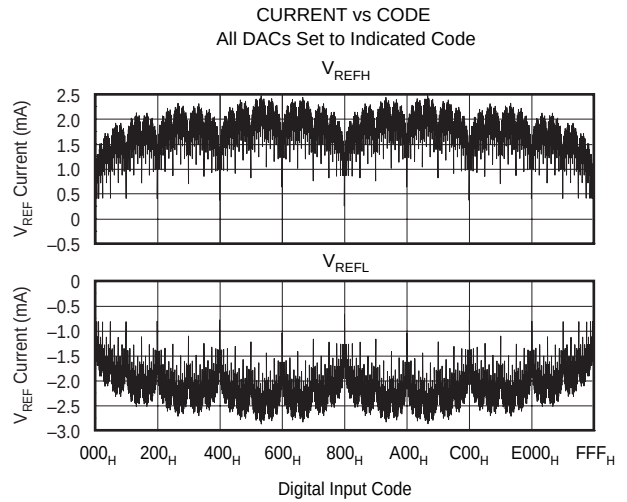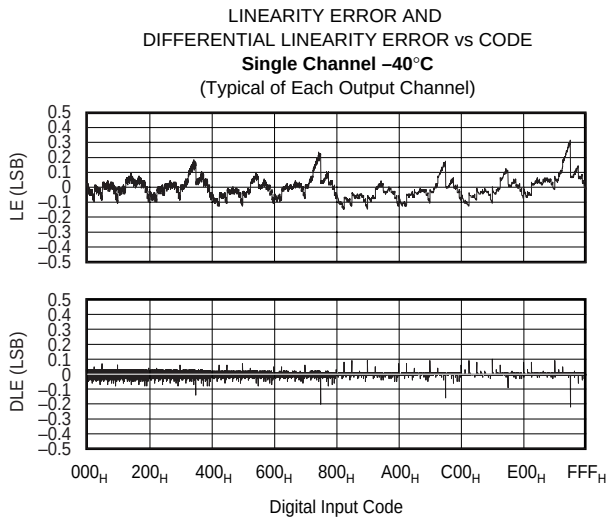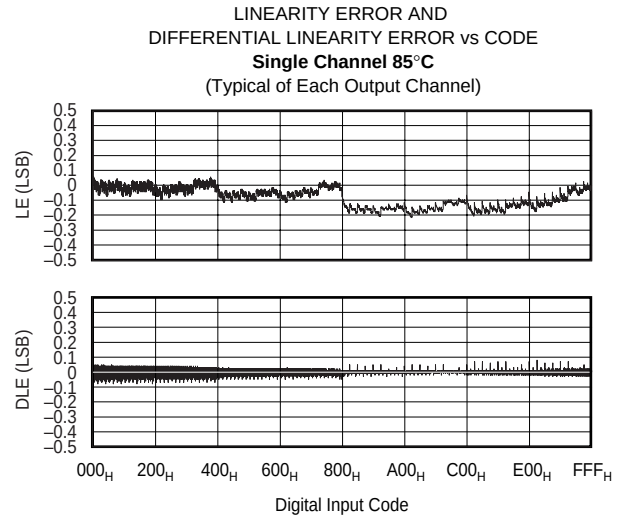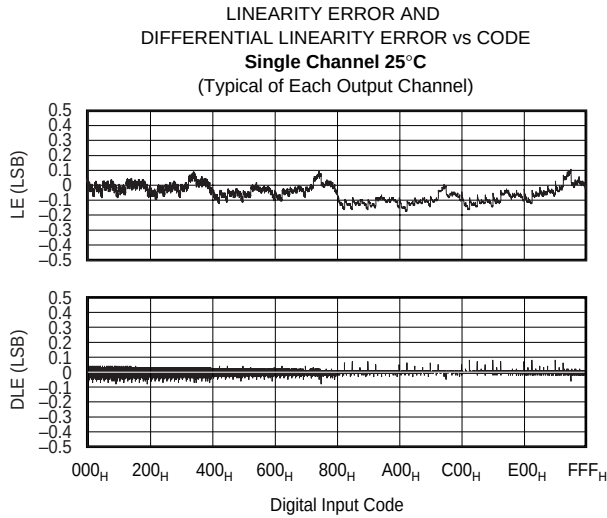






# TYPICAL PERFORMANCE CURVES: $V_{SS} = -15V$ (Cont.)

At  $T_A = +25^\circ C$ ,  $V_{CC} = +15V$ ,  $V_{SS} = 0V$ ,  $V_{REFH} = +10V$ ,  $V_{REFL} = 0V$ , representative unit, unless otherwise specified.

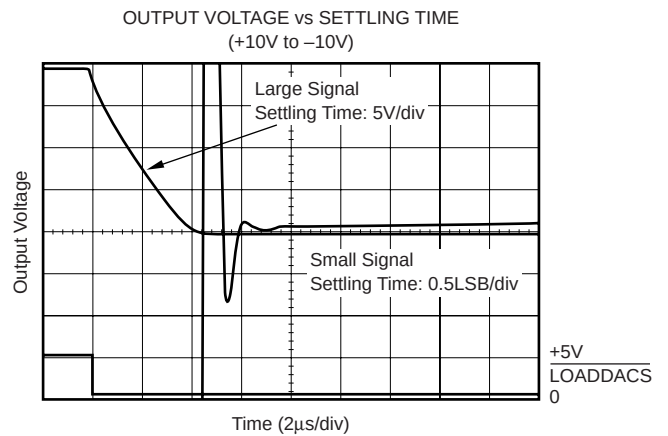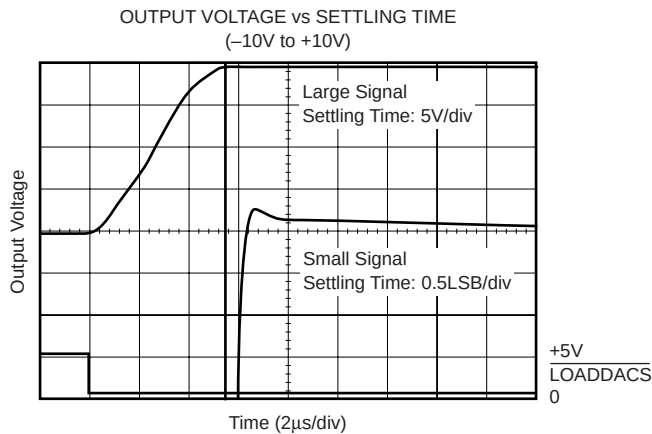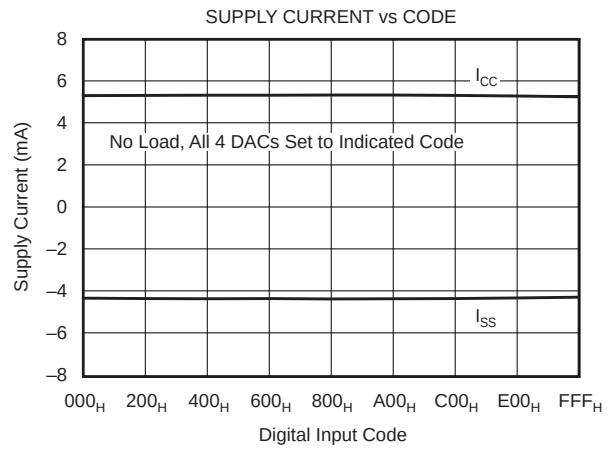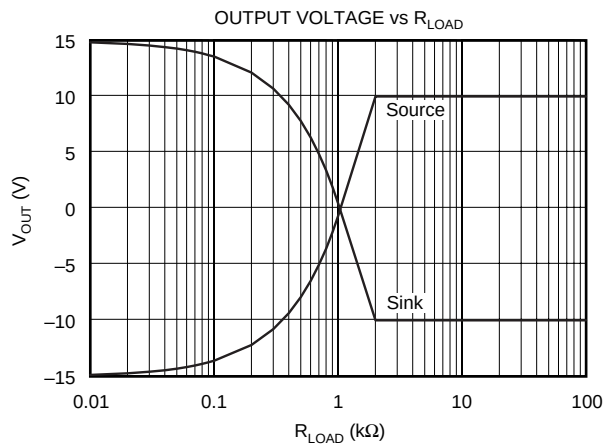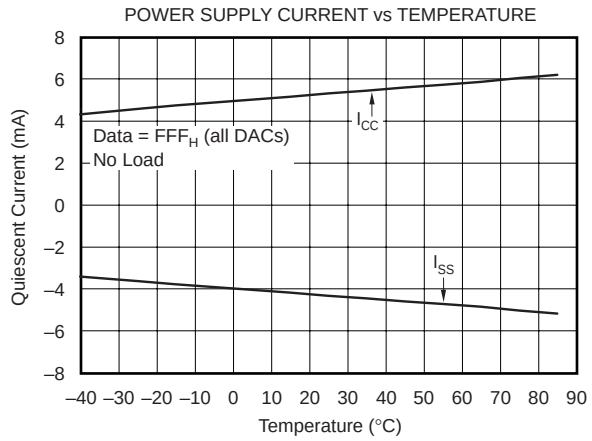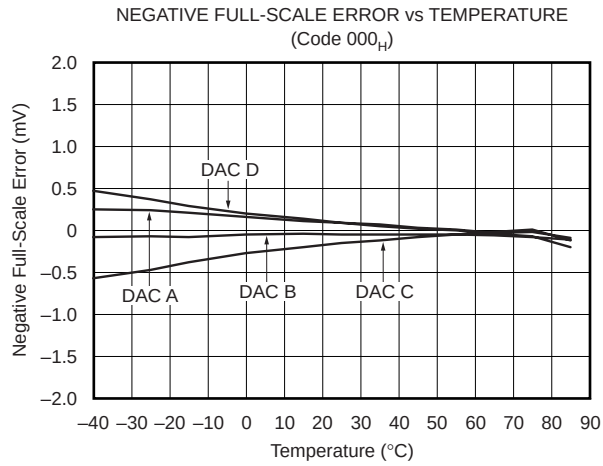

# TYPICAL PERFORMANCE CURVES: $V_{SS} = -15V$ (Cont.)

At  $T_A = +25^\circ C$ ,  $V_{CC} = +15V$ ,  $V_{SS} = 0V$ ,  $V_{REFH} = +10V$ ,  $V_{REFL} = 0V$ , representative unit, unless otherwise specified.

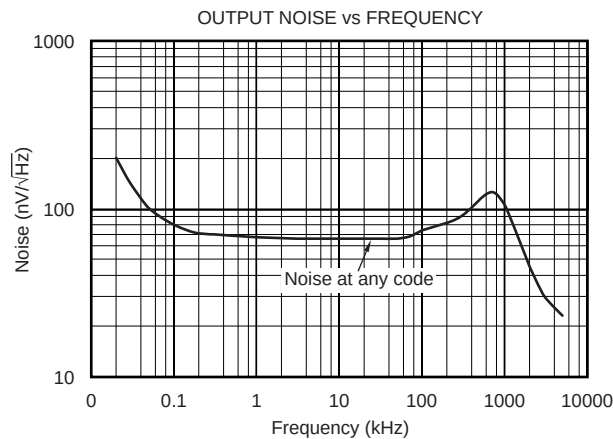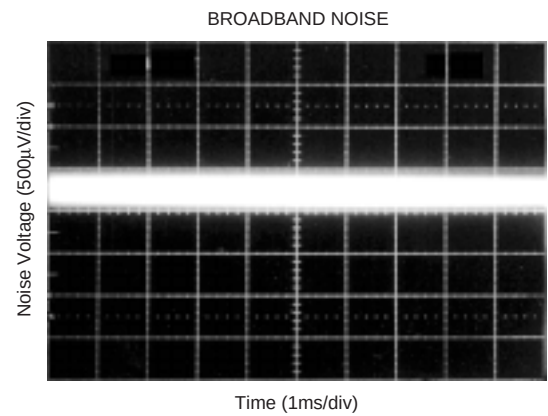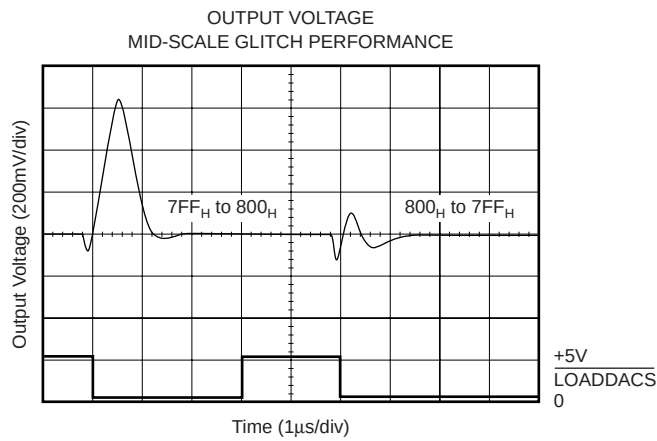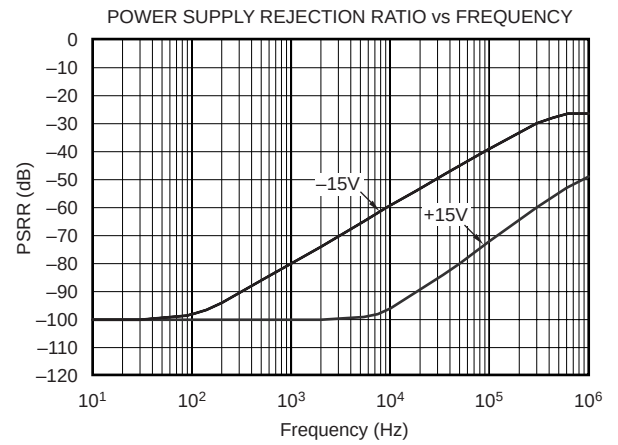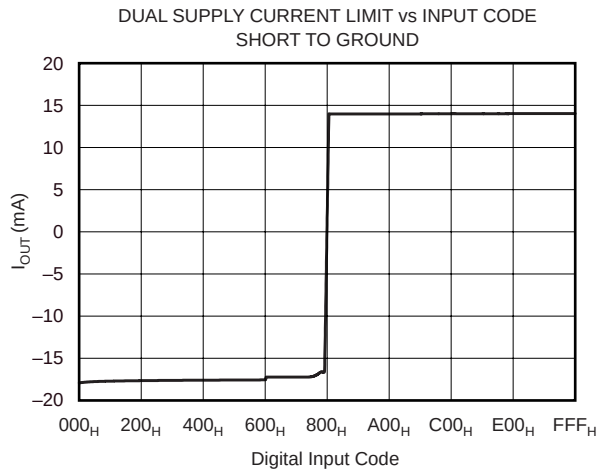

# THEORY OF OPERATION

The DAC7715 is a quad, serial input, 12-bit, voltage output DAC. The architecture is a classic R-2R ladder configuration followed by an operational amplifier that serves as a buffer, as shown in Figure 1. Each DAC has its own R-2R ladder network and output op amp, but all share the reference voltage inputs. The minimum voltage output (“zero-scale”) and maximum voltage output (“full-scale”) are set by external voltage references ( $V_{REFL}$  and  $V_{REFH}$ , respectively). The

digital input is a 16-bit serial word that contains the 12-bit DAC code and a 2-bit address code that selects one of the four DACs (the two remaining bits are unused). The converter can be powered from a single +15V supply or a dual  $\pm 15V$  supply. Each device offers a reset function which immediately sets all DAC output voltages and internal registers to either zero-scale (code 000<sub>H</sub>) or mid-scale (code 800<sub>H</sub>). The reset code is selected by the state of the RESETSEL pin (LOW = 000<sub>H</sub>, HIGH = 800<sub>H</sub>). See Figures 2 and 3 for the basic operation of the DAC7715.

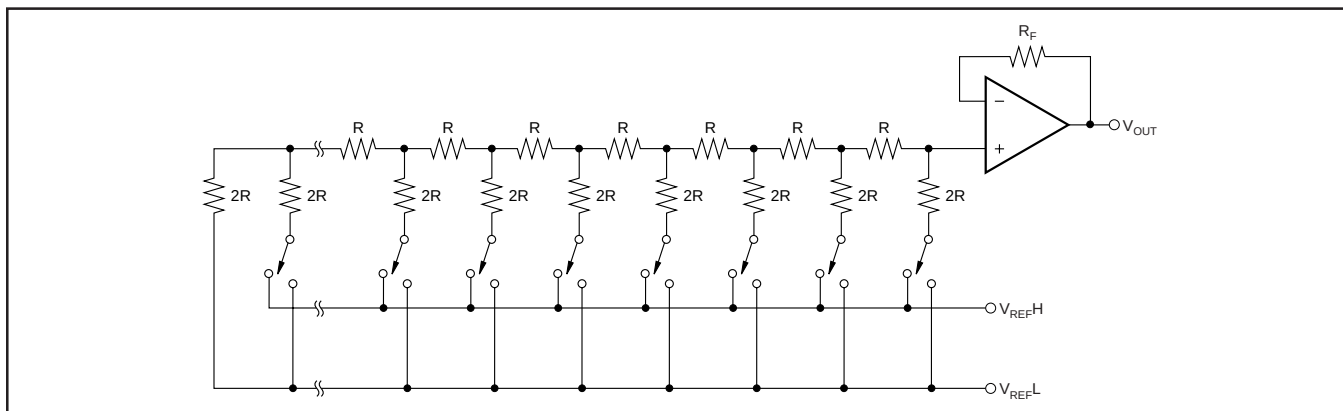


FIGURE 1. DAC7715 Architecture.

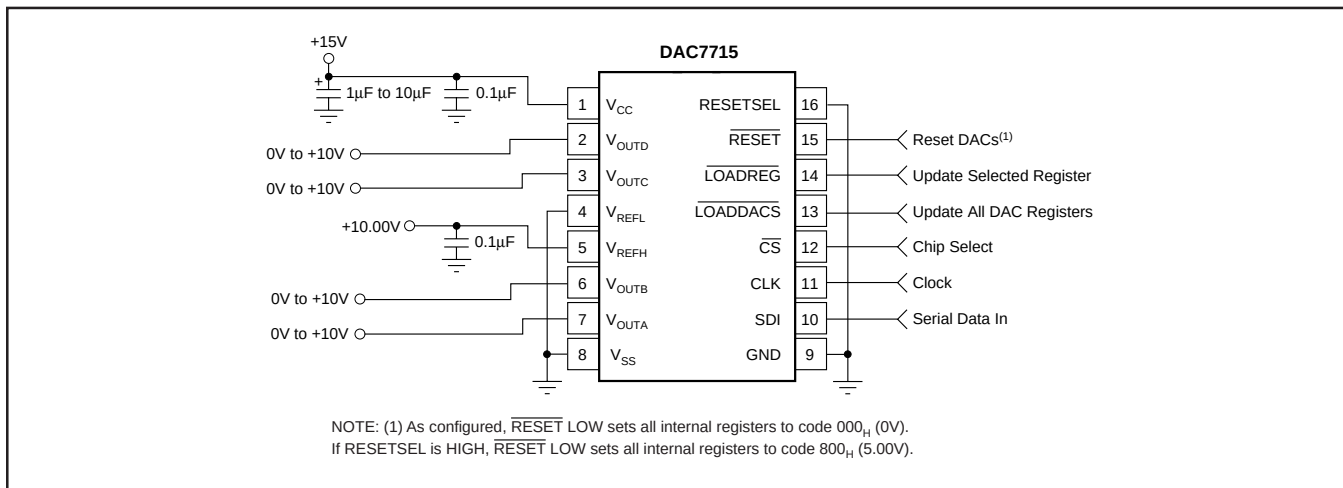


FIGURE 2. Basic Single-Supply Operation of the DAC7715.

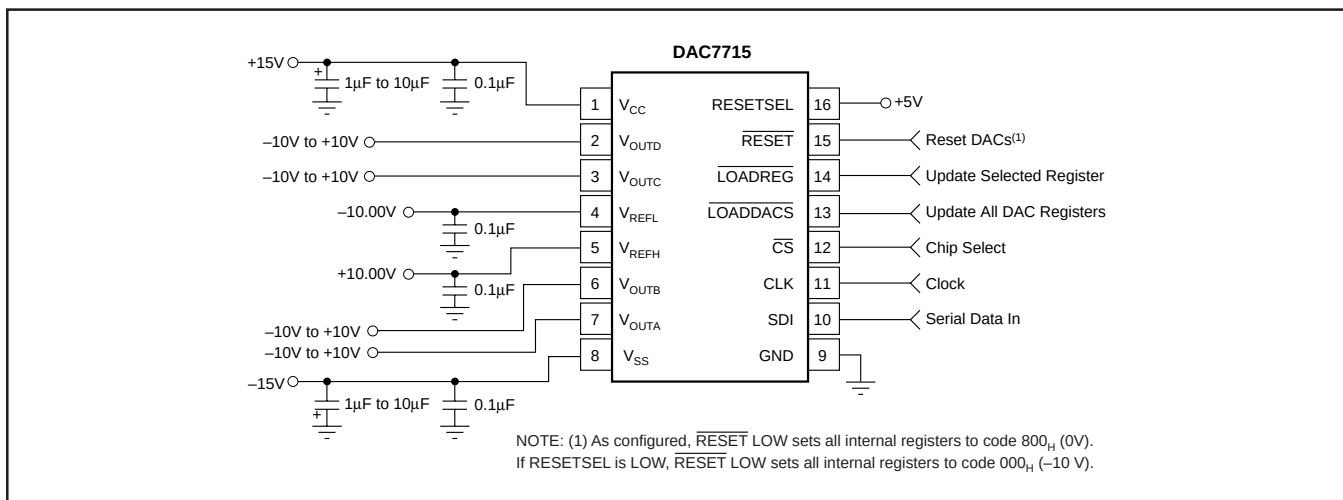


FIGURE 3. Basic Dual-Supply Operation of the DAC7715.

## ANALOG OUTPUTS

When  $V_{SS} = -15V$  (dual supply operation), the output amplifier can swing to within 4V of the supply rails, over the  $-40^{\circ}C$  to  $+85^{\circ}C$  temperature range. With  $V_{SS} = 0V$  (single-supply operation), the output can swing to ground. Note that the settling time of the output op amp will be longer with voltages very near ground. Also, care must be taken when measuring the zero-scale error when  $V_{SS} = 0V$ . If the output amplifier has a negative offset, the output voltage may not change for the first few digital input codes (000<sub>H</sub>, 001<sub>H</sub>, 002<sub>H</sub>, etc.) since the output voltage cannot swing below ground.

At the negative offset limit of  $-4LSB$  ( $-9.76mV$ ), for the single-supply case, the first specified output starts at code 004<sub>H</sub>.

## REFERENCE INPUTS

The reference inputs,  $V_{REFL}$  and  $V_{REFH}$ , can be any voltage between  $V_{SS} + 4V$  and  $V_{CC} - 4V$  provided that  $V_{REFH}$  is at least 1.25V greater than  $V_{REFL}$ . The minimum output of each DAC is equal to  $V_{REFL} - 1LSB$  plus a small offset voltage (essentially, the offset of the output op amp). The maximum output is equal to  $V_{REFH}$  plus a similar offset voltage. Note that  $V_{SS}$  (the negative power supply) must either be connected to ground or be in the range of  $-14.75V$  to  $-15.25V$ . The voltage on  $V_{SS}$  sets several bias points within the converter. If  $V_{SS}$  is not in one of these two configurations, the bias values may be in error and proper operation of the device is not guaranteed.

The current into the reference inputs depends on the DAC output voltages and can vary from a few microamps to

approximately 3mA. The reference input appears as a varying load to the reference. If the reference can sink or source the required current, a reference buffer is not required. See "Reference Current vs Code" in the Typical Performance Curves.

The analog supplies must come up before the reference power supplies, if they are separate. If the power supplies for the references come up first, then the  $V_{CC}$  and  $V_{SS}$  supplies will be powered from the reference via the ESD protection diodes (see page 4).

## DIGITAL INTERFACE

Figure 4 and Table I provide the basic timing for the DAC7715. The interface consists of a serial clock (CLK), serial data (SDI), a load register signal ( $\overline{LOADREG}$ ), and a

| SYMBOL     | DESCRIPTION                             | MIN | TYP | MAX | UNITS   |
|------------|-----------------------------------------|-----|-----|-----|---------|
| $t_{DS}$   | Data Valid to CLK Rising                | 25  |     |     | ns      |
| $t_{DH}$   | Data Held Valid after CLK Rises         | 20  |     |     | ns      |
| $t_{CH}$   | CLK HIGH                                | 30  |     |     | ns      |
| $t_{CL}$   | CLK LOW                                 | 50  |     |     | ns      |
| $t_{CSS}$  | $\overline{CS}$ LOW to CLK Rising       | 55  |     |     | ns      |
| $t_{CSH}$  | CLK HIGH to $\overline{CS}$ Rising      | 15  |     |     | ns      |
| $t_{LD1}$  | $\overline{LOADREG}$ HIGH to CLK Rising | 40  |     |     | ns      |
| $t_{LD2}$  | CLK Rising to $\overline{LOADREG}$ LOW  | 15  |     |     | ns      |
| $t_{LDRW}$ | $\overline{LOADREG}$ LOW Time           | 45  |     |     | ns      |
| $t_{LDDW}$ | $\overline{LOADDACS}$ LOW Time          | 45  |     |     | ns      |
| $t_{RSSH}$ | RESETSEL Valid to RESET LOW             | 25  |     |     | ns      |
| $t_{RSTW}$ | RESET LOW Time                          | 70  |     |     | ns      |
| $t_S$      | Settling Time                           | 10  |     |     | $\mu s$ |

TABLE I. Timing Specifications ( $T_A = -40^{\circ}C$  to  $+85^{\circ}C$ ).

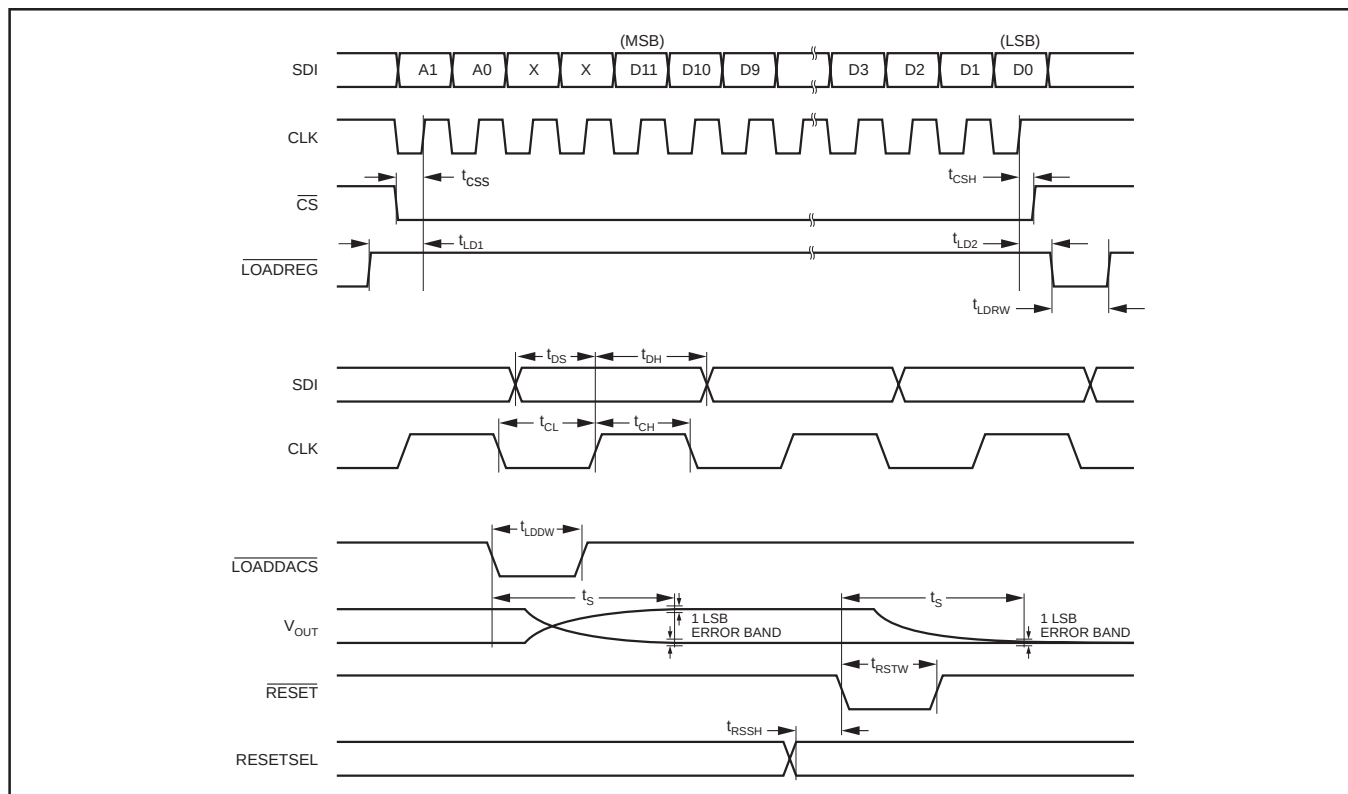


FIGURE 4. DAC7715 Timing.

| A1               | A0 | LOADREG | LOADDACS         | RESET | SELECTED INPUT REGISTER | STATE OF SELECTED INPUT REGISTER | STATE OF ALL DAC REGISTERS |
|------------------|----|---------|------------------|-------|-------------------------|----------------------------------|----------------------------|
| L <sup>(1)</sup> | L  | L       | H <sup>(2)</sup> | H     | A                       | Transparent                      | Latched                    |
| L                | H  | L       | H                | H     | B                       | Transparent                      | Latched                    |
| H                | L  | L       | H                | H     | C                       | Transparent                      | Latched                    |
| H                | H  | L       | H                | H     | D                       | Transparent                      | Latched                    |
| X <sup>(3)</sup> | X  | H       | L                | H     | NONE                    | (All Latched)                    | Transparent                |
| X                | X  | H       | H                | H     | NONE                    | (All Latched)                    | Latched                    |
| X                | X  | X       | X                | L     | ALL                     | Reset <sup>(4)</sup>             | Reset <sup>(4)</sup>       |

NOTES: (1) L = Logic LOW. (2) H = Logic HIGH. (3) X = Don't Care. (4) Resets to either 000H or 800<sub>H</sub>, per the RESETSEL state (LOW = 000<sub>H</sub>, HIGH = 800<sub>H</sub>). When RESET rises, all registers that are in their latched state retain the reset value.

TABLE II. Control Logic Truth Table.

| CS <sup>(1)</sup> | CLK <sup>(1)</sup> | LOADREG          | RESET            | SERIAL SHIFT REGISTER |
|-------------------|--------------------|------------------|------------------|-----------------------|
| H <sup>(2)</sup>  | X <sup>(3)</sup>   | H                | H                | No Change             |
| L <sup>(4)</sup>  | L                  | H                | H                | No Change             |
| L                 | ↑ <sup>(5)</sup>   | H                | H                | Advanced One Bit      |
| ↑                 | L                  | H                | H                | Advanced One Bit      |
| H <sup>(6)</sup>  | X                  | L <sup>(7)</sup> | H                | No Change             |
| H <sup>(6)</sup>  | X                  | H                | L <sup>(8)</sup> | No Change             |

NOTES: (1) CS and CLK are interchangeable. (2) H = Logic HIGH. (3) X = Don't Care. (4) L = Logic LOW (5) = Positive Logic Transition. (6) A HIGH value is suggested in order to avoid a "false clock" from advancing the shift register and changing the shift register. (7) If data is clocked into the serial register while LOADREG is LOW, the selected input register will change as the shift register bits "flow" through A1 and A0. This will corrupt the data in each input register that has been erroneously selected. (8) RESET LOW causes no change in the contents of the serial shift register.

TABLE III. Serial Shift Register Truth Table.

"load all DAC registers" signal (LOADDACS). In addition, a chip select (CS) input is available to enable serial communication when there are multiple serial devices. An asynchronous reset input (RESET) is provided to simplify start-up conditions, periodic resets, or emergency resets to a known state.

The DAC code and address are provided via a 16-bit serial interface as shown in Figure 4. The first two bits select the input register that will be updated when LOADREG goes LOW, as shown in Table II. The next two bits are not used. The last 12 bits are the DAC code which is provided, most significant bit first.

Note that CS and CLK are combined with an OR gate and the output controls the serial-to-parallel shift register internal to the DAC7715 (see the block diagram on the front of this data sheet). These two inputs are completely interchangeable. In addition, care must be taken with the state of

CLK when CS rises at the end of a serial transfer. If CLK is LOW when CS rises, the OR gate will provide a rising edge to the shift register, shifting the internal data one additional bit. The result will be incorrect data and possible selection of the wrong input register.

If both CS and CLK are used, then CS should rise only when CLK is HIGH. If not, then either CS or CLK can be used to operate the shift register. See Table III for more information.

The digital data into the DAC7715 is double-buffered. This allows new data to be entered for each DAC without disturbing the analog outputs. When the new settings have been entered into the device, all of the DAC outputs can be updated simultaneously. The transfer from the input registers to the DAC registers is accomplished with a HIGH to LOW transition on the LOADDACS input.

Because the DAC registers become transparent when LOADDACS is LOW, it is possible to keep this pin LOW and update each DAC via LOADREG. However, as each new data word is entered into the device, the corresponding output will update immediately when LOADREG is taken LOW.

### Digital Input Coding

The DAC7715 input data is in Straight Binary format. The output voltage is given by the following equation:

$$V_{OUT} = V_{REFL} + \frac{(V_{REFH} - V_{REFL}) \cdot N}{4096}$$

where N is the digital input code (in decimal). This equation does not include the effects of offset (zero-scale) or gain (full-scale) errors.

## LAYOUT

A precision analog component requires careful layout, adequate bypassing, and clean, well-regulated power supplies. As the DAC7715 offers single-supply operation, it will often be used in close proximity with digital logic, microcontrollers, microprocessors, and digital signal processors. The more digital logic present in the design and the higher the switching speed, the more difficult it will be to achieve good performance from the converter.

Because the DAC7715 has a single ground pin, all return currents, including digital and analog return currents, must flow through the GND pin. Ideally, GND would be connected directly to an analog ground plane. This plane would

be separate from the ground connection for the digital components until they were connected at the power entry point of the system.

The power applied to  $V_{DD}$  (as well as  $V_{SS}$ , if not grounded) should be well regulated and low noise. Switching power supplies and DC/DC converters will often have high-frequency glitches or spikes riding on the output voltage. In addition, digital components can create similar high-frequency spikes as their internal logic switches states. This noise can easily couple into the DAC output voltage through various paths between the power connections and analog output.

**PACKAGING INFORMATION**

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| DAC7715U         | ACTIVE                | SOIC         | DW              | 16   | 48          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-3-260C-168 HR          |
| DAC7715U/1K      | ACTIVE                | SOIC         | DW              | 16   | 1000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-3-260C-168 HR          |
| DAC7715U/1KG4    | ACTIVE                | SOIC         | DW              | 16   | 1000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-3-260C-168 HR          |
| DAC7715UB        | ACTIVE                | SOIC         | DW              | 16   | 48          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-3-260C-168 HR          |
| DAC7715UB/1K     | ACTIVE                | SOIC         | DW              | 16   | 1000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-3-260C-168 HR          |
| DAC7715UB/1KG4   | ACTIVE                | SOIC         | DW              | 16   | 1000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-3-260C-168 HR          |
| DAC7715UBG4      | ACTIVE                | SOIC         | DW              | 16   | 48          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-3-260C-168 HR          |
| DAC7715UG4       | ACTIVE                | SOIC         | DW              | 16   | 48          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-3-260C-168 HR          |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

|                    |                                                                    |
|--------------------|--------------------------------------------------------------------|
| Amplifiers         | <a href="http://amplifier.ti.com">amplifier.ti.com</a>             |
| Data Converters    | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>     |
| DSP                | <a href="http://dsp.ti.com">dsp.ti.com</a>                         |
| Interface          | <a href="http://interface.ti.com">interface.ti.com</a>             |
| Logic              | <a href="http://logic.ti.com">logic.ti.com</a>                     |
| Power Mgmt         | <a href="http://power.ti.com">power.ti.com</a>                     |
| Microcontrollers   | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a> |
| Low Power Wireless | <a href="http://www.ti.com/lpw">www.ti.com/lpw</a>                 |

### Applications

|                    |                                                                          |
|--------------------|--------------------------------------------------------------------------|
| Audio              | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                   |
| Automotive         | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>         |
| Broadband          | <a href="http://www.ti.com/broadband">www.ti.com/broadband</a>           |
| Digital Control    | <a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a> |
| Military           | <a href="http://www.ti.com/military">www.ti.com/military</a>             |
| Optical Networking | <a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a> |
| Security           | <a href="http://www.ti.com/security">www.ti.com/security</a>             |
| Telephony          | <a href="http://www.ti.com/telephony">www.ti.com/telephony</a>           |
| Video & Imaging    | <a href="http://www.ti.com/video">www.ti.com/video</a>                   |
| Wireless           | <a href="http://www.ti.com/wireless">www.ti.com/wireless</a>             |

Mailing Address: Texas Instruments  
Post Office Box 655303 Dallas, Texas 75265