

**FEATURES**


- \* 0.28 INCH (7.0 mm) DIGIT HEIGHT
- \* CONTINUOUS UNIFORM SEGMENTS
- \* LOW POWER REQUIREMENT
- \* EXCELLENT CHARACTERS APPEARANCE
- \* HIGH BRIGHTNESS & HIGH CONTRAST
- \* WIDE VIEWING ANGLE
- \* SOLID STATE RELIABILITY
- \* CATEGORIZED FOR LUMINOUS INTENSITY
- \* **LEAD FREE PACKAGE**

**DESCRIPTION**


The LTS-2805SKR-P is a 0.28inch (7.0mm) digit height single digit seven-segment display. This device uses AlInGaP SUPER RED chips (AlInGaP epi on GaAs substrate). The display has a gray face and white segments.

**DEVICE**


PART NO.	DESCRIPTION
AlInGaP SUPER RED	COMMON ANODE
LTS-2805SKR-P	

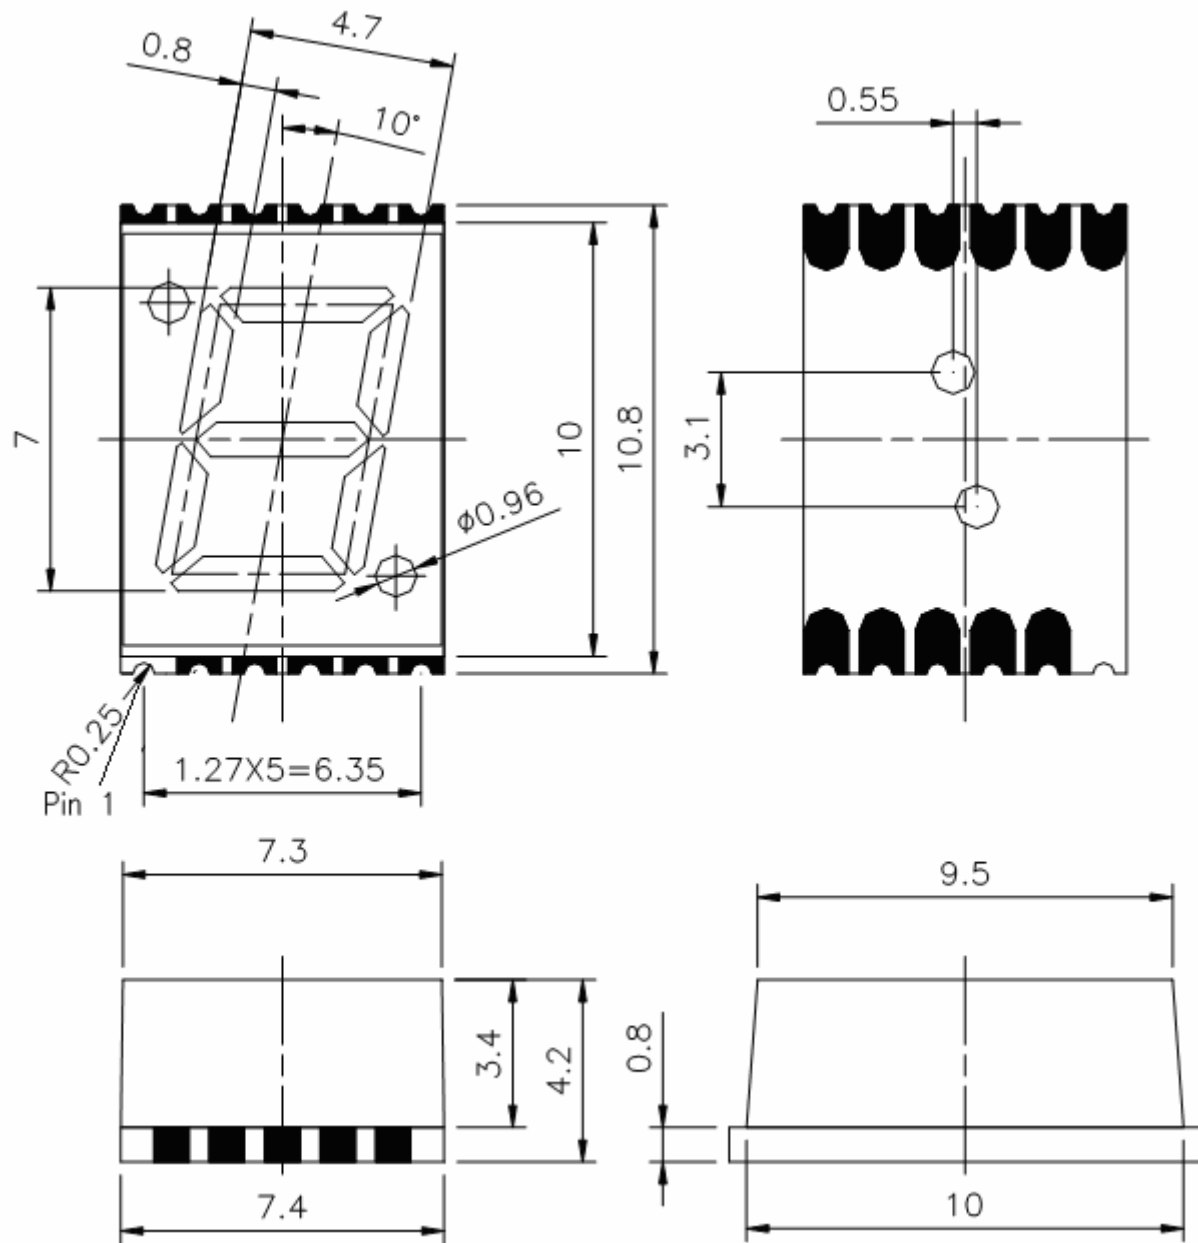**PACKAGE DIMENSIONS**


NOTES: All dimensions are in millimeters. Tolerances are  $\pm 0.25$ -mm (0.01") unless otherwise noted.



### INTERNAL CIRCUIT DIAGRAM

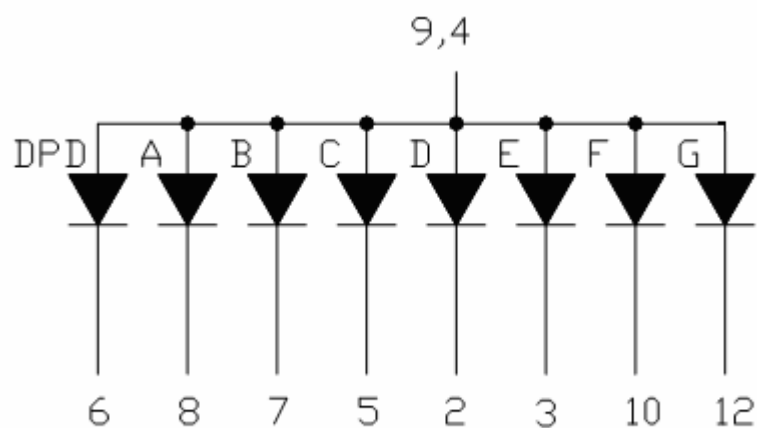

**PIN CONNECTION**

<b>No.</b>	<b>CONNECTION</b>
1	NO CONNECTION
2	CATHODE D
3	CATHODE E
4	COMMON ANODE
5	CATHODE C
6	CATHODE DPD
7	CATHODE B
8	CATHODE A
9	COMMON ANODE
10	CATHODE F
11	CATHODE DPA
12	CATHODE G

**ABSOLUTE MAXIMUM RATING**

PARAMETER	MAXIMUM RATING	UNIT
Power Dissipation Per Segment	70	mW
Peak Forward Current Per Segment ( Frequency 1Khz, 10% duty cycle)	90	mA
Continuous Forward Current Per Segment	25	mA
Derating Linear From 25 <sup>0</sup> C Per Segment	0.33	mA/ <sup>0</sup> C
Reverse Voltage Per Segment	5	V
*Electrostatic Discharge Threshold(HBM)	300	V
Operating Temperature Range	-40 <sup>0</sup> C to +105 <sup>0</sup> C	
Storage Temperature Range	-40 <sup>0</sup> C to +105 <sup>0</sup> C	
Solder Temperature 1/16 inch Below Seating Plane for 3 Seconds at 260 <sup>0</sup> C		
IR Reflow conditions as Page 6 of 6		

\* HBM: Human Body Model. Seller gives no other assurances regarding the ability of product to withstand ESD.






**ELECTRICAL / OPTICAL CHARACTERISTICS AT Ta=25<sup>0</sup>C**

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	I <sub>v</sub>		900		μcd	I <sub>F</sub> =1mA
			11700			I <sub>F</sub> =10mA
Peak Emission Wavelength	λ <sub>p</sub>		639		Nm	I <sub>F</sub> =20mA
Spectral Line Half-Width	Δλ		20		Nm	I <sub>F</sub> =20mA
Dominant Wavelength	λ <sub>d</sub>		631		Nm	I <sub>F</sub> =20mA
Forward Voltage Per Segment	V <sub>F</sub>		2.0	2.4	V	I <sub>F</sub> =20mA
Reverse Current Per Segment	I <sub>R</sub>			100	μA	V <sub>R</sub> =5V
Luminous Intensity Matching Ratio	I <sub>v</sub> -m			2:1		I <sub>F</sub> =1mA



Note: Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commission International De L'Eclairage) eye-response curve.

### TYPICAL ELECTRICAL / OPTICAL CHARACTERISTIC CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

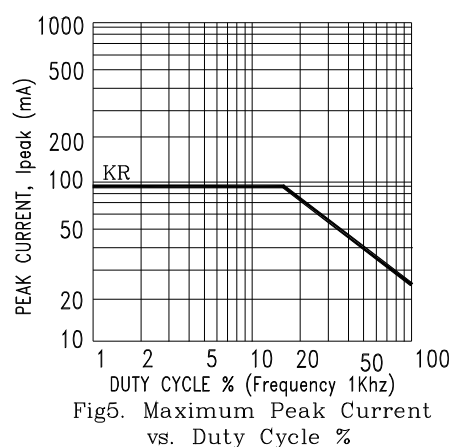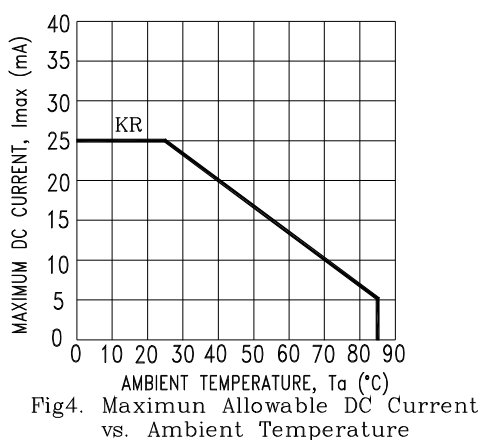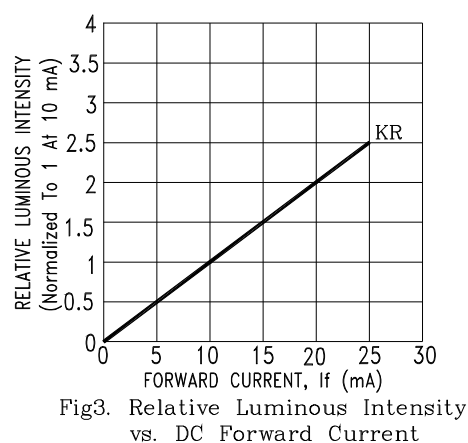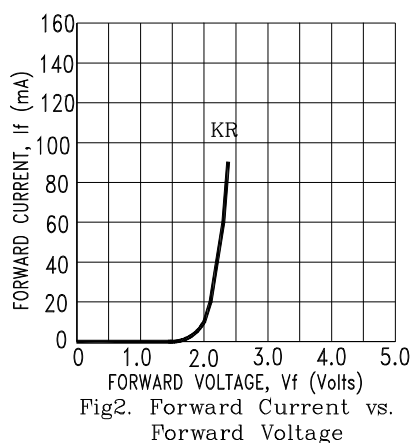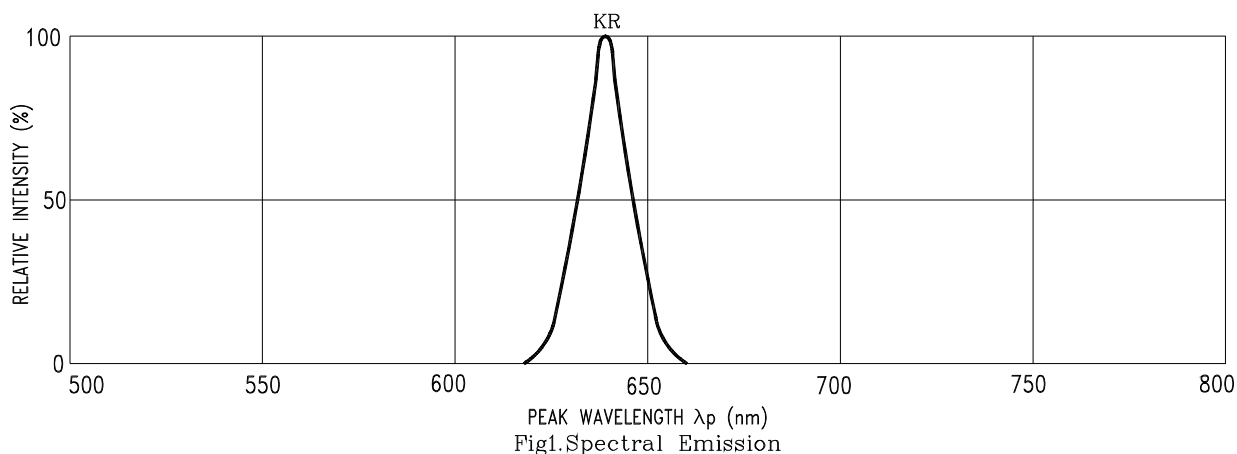

NOTE : KR=AlInGaP SUPER RED

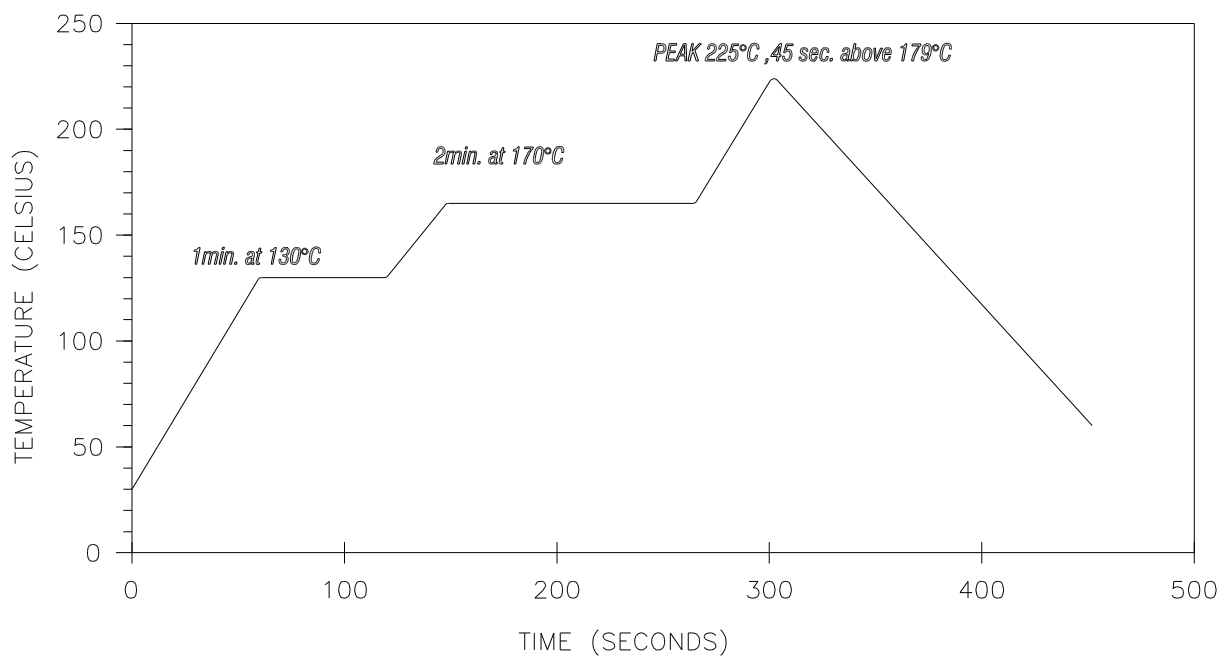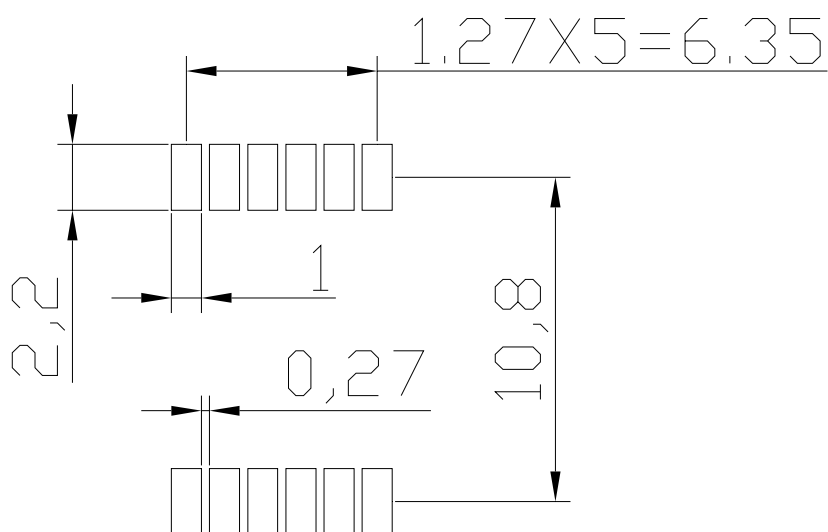**IR REFLOW MAXIMUM RATING TEMPERATURE**

**RECOMMENDED SOLDERING PATTERN ( UNIT : mm )**


**0.28 inch ( 7.0mm )**  
**Single-Digit Surface Mount Led Display**

